GARAGEDOORSONLINE **Survey form for internally installed roller shutter garage door only**

Name:	**Date**
Address:	
Postcode:	Home Tel:
Email:	Mob Tel:

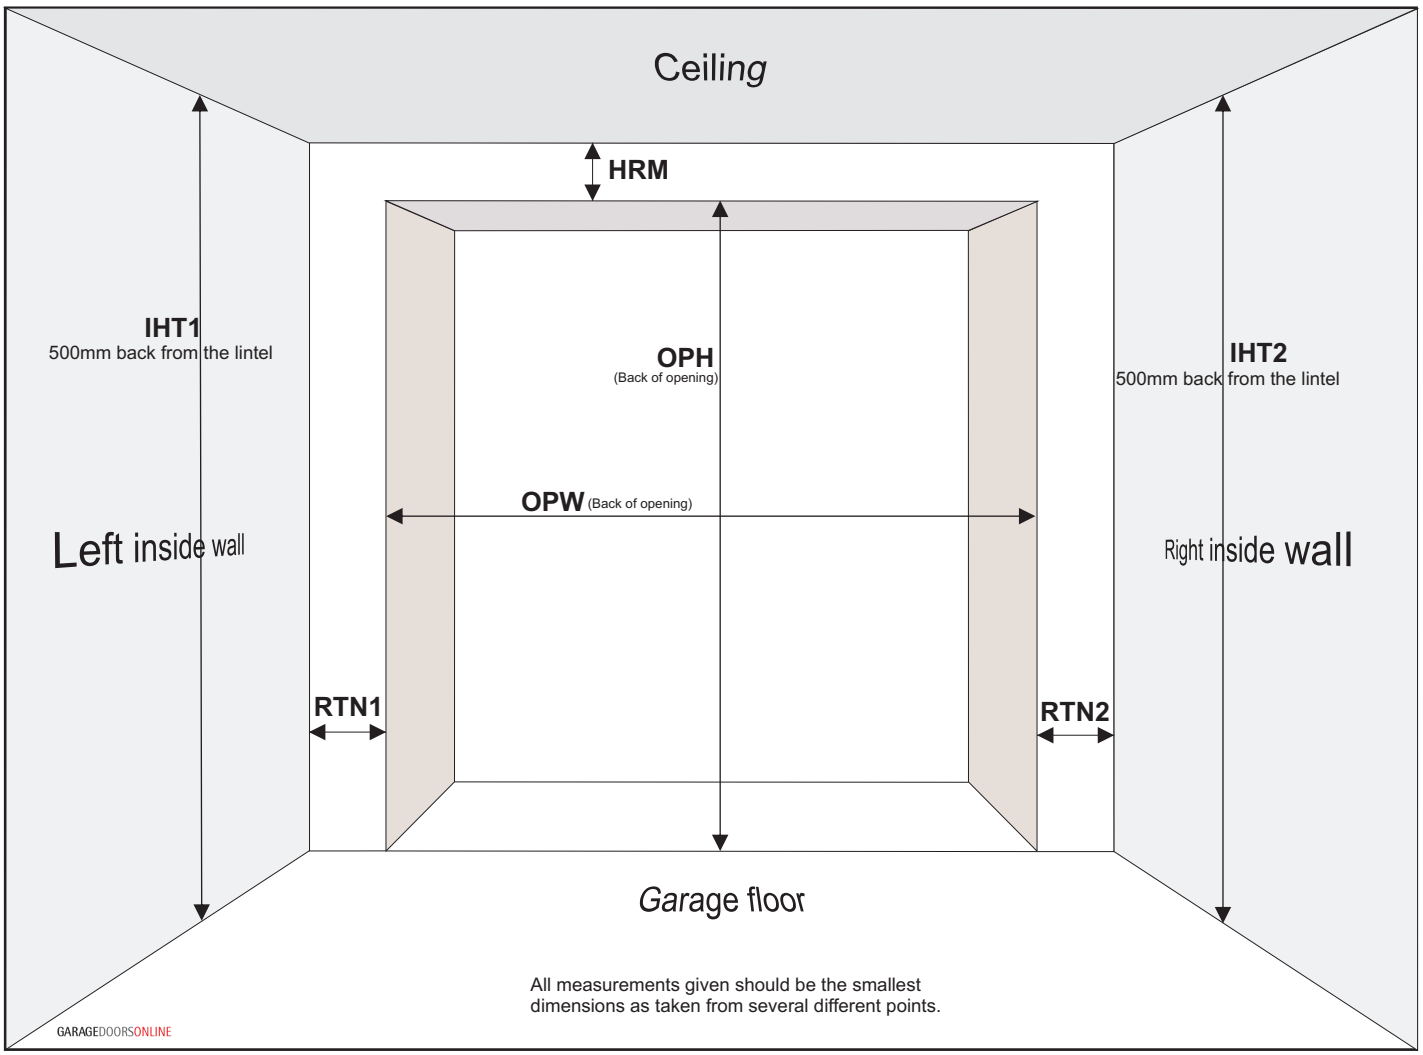

Aperture dimensions		Return/reveal details		Inside details	
OPW =		**RTN1 =**		**HRM =**	
OPH =		**RTN2 =**		**IHT1 =**	
				IHT2 =	

GARAGEDOORSONLINE
www.garagedoorsonline.co.uk
Fax to: (01926) 832700
Tel:(01926) 463888

Ideal basic dimensions for roller shutter doors:

Seceuroglide RTN min. 75mm (90mm for bigger doors)
Thermaglide HRM min. 300mm (350mm for doors over 2500mm)

Steel Line RTN min. 100mm (150mm for bigger doors)
Gliderol HRM min. 380mm (up to 455mm for highest doors)

Minimum distance into the garage 300mm up to 500mm for the Steel Line doors.

See our **DIY Guide** for either door on garagedoorsonline.co.uk

Notes:

GARAGEDOORSONLINE

OPW =
OPH = Opening height
IHT = Internal height
RTN = Return width
HRM = Headroom

We can offer roller shutter doors up to 7000mm wide and 6000mm high if required. The specification and requirements for sideroom and headroom will differ on these larger doors as will the requirements for safety devices. Please call for further details or email to enquiries@garagedoorsonline.co.uk

Tel (01926) 463888