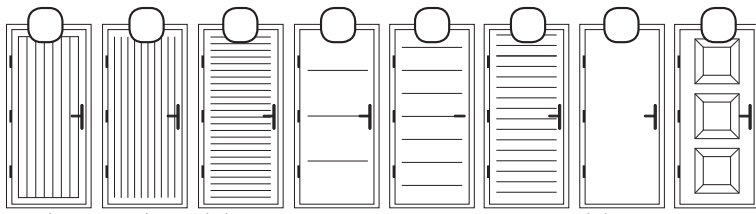


## Ordering Information

## Style

Vertical  
Tongue &  
GrooveVertical  
Boarded

Slimline-77

Linear L

Linear M

Linear S

Flush

Georgian

Size (refer to notes top right)

Panel

Insulated ☐  
Single Skin ☐

Overall frame width (FW) .....

Overall frame height (FH) .....

## Mounting

## Opening

Between Brickwork ☐ Outward ☐Behind Brickwork\* ☐ Inward ☐Back fixing kit ☐ When viewed from  
outside the garage

\*A back fixing kit will be required.

## Hinge Side

L ☐ R ☐ When viewed from  
outside the garage

## Threshold

Standard 15mm low profile ☐Optional 30mm ramped ☐

## Colour

White ☐ Rosewood (foil) ☐Golden Oak (foil)\*\* ☐ Black (foil) ☐Anthracite (foil) ☐

Custom colour, RAL or B.S. number:

\*\*Georgian  
style not  
available in  
Golden Oak

## Options

Rain Guard (top of door) ☐ERA™ anti-bump cylinder ☐Hoppe™ door closer ☐

## Windows

Stainless Steel: Round ☐ Square ☐ Glass: Clear ☐ Obscure ☐

## Handles (black standard)

Black (standard) ☐Silver Satin ☐Smoked Chrome ☐White ☐

## Specification &amp; Survey Form

Customer Name: .....

Address: .....

Postcode: .....

Tel Mobile: .....

Tel Office: .....


P.O. / Order Reference .....

Email: .....


## Sizing Notes

**IMPORTANT: NO FITTING  
CLEARANCE IS INCLUDED  
IN SIZES****Fixing between brickwork:**Recommended ordering size is  
the minimum structural opening  
width minus 15mm and height  
minus 10mm.**Fixing behind brickwork:**15mm must be allowed at the  
sides and head for outward  
opening doors. See figure 2.


## Dimensions

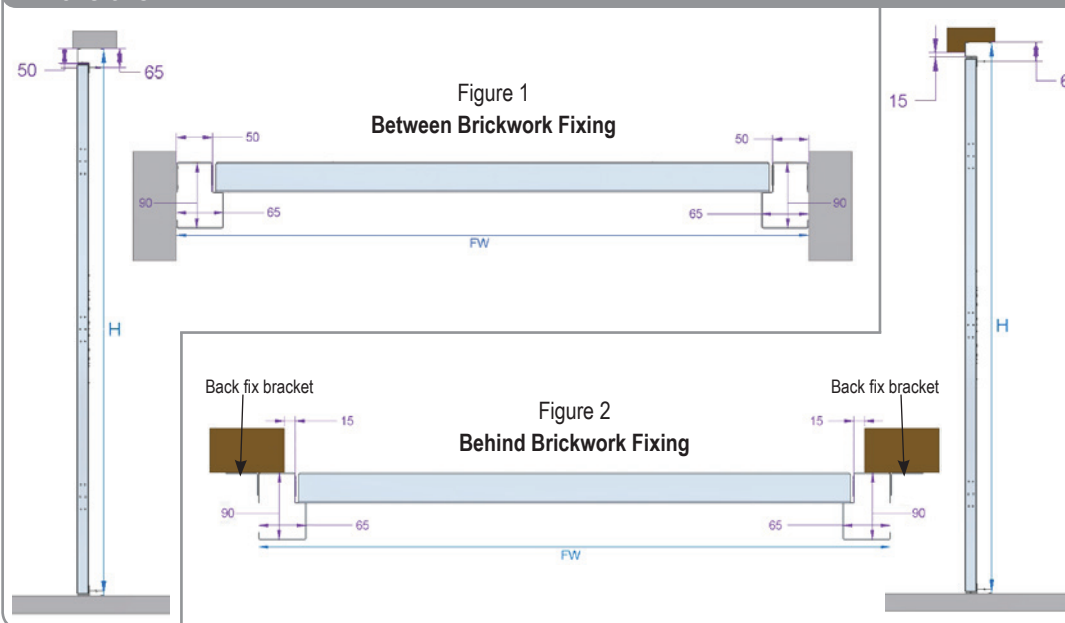

## Terminology &amp; Clearances

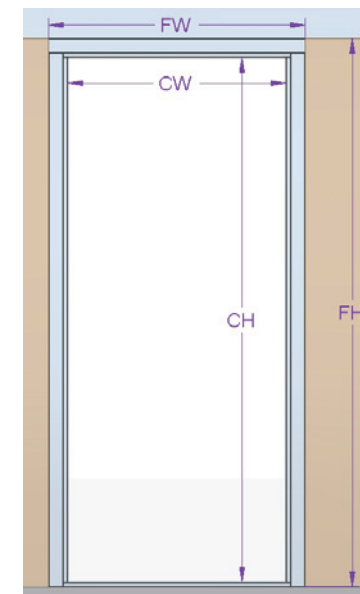**FW** Overall frame width**CW** Clear passage width = FW - 127mm**FH** Overall frame height**CH** Clear passage height = FH - 80mm  
For standard 15mm low profile threshold**CH** Clear passage height = FH - 90mm  
For optional 30mm ramped threshold

## Thresholds

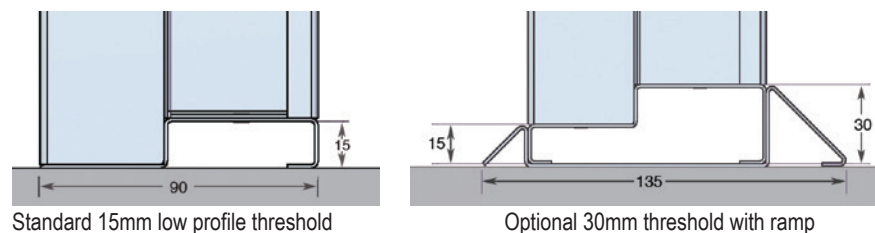

Standard 15mm low profile threshold

Optional 30mm threshold with ramp