



# Sectional Garage Doors

NEW: LPU 67 Thermo – The energy-saving door

**HÖRMANN**



## CONTENT

|    |                                                        |
|----|--------------------------------------------------------|
| 6  | Good reasons to try Hörmann                            |
| 16 | Overview of steel sectional doors                      |
| 20 | Overview of solid timber sectional doors               |
| 22 | Overview of steel surface finishes and types of timber |
| 24 | General overview                                       |
| 28 | Door styles                                            |
| 42 | Colour                                                 |
| 48 | Manual release                                         |
| 50 | Glazings                                               |
| 52 | Wicket doors                                           |
| 54 | Side doors                                             |
| 56 | Modernise and improve                                  |
| 62 | Garage door operators                                  |
| 66 | Accessories                                            |
| 72 | Technology                                             |
| 78 | Performance characteristics                            |
| 80 | Dimensions and fitting data                            |

Some of the doors shown are equipped with optional extras and do not always correspond to our standard models.


The surface finishes and colours shown are subject to the limitations of the printing process and cannot be regarded as binding.

All rights reserved. No part may be reproduced without our prior permission. Subject to changes.

## Benefit from numerous advantages

Sectional doors open vertically upwards and are suspended under the ceiling to save space. This construction principle means you can make full use of the space inside and in front of the garage. Sectional garage doors can be fitted in any garage opening and offer up to 14 cm more passage width than up-and-over doors. They are also optimally sealed with flexible and weather-resistant seals on all four sides.

Treat yourself to this comfort and convenience.

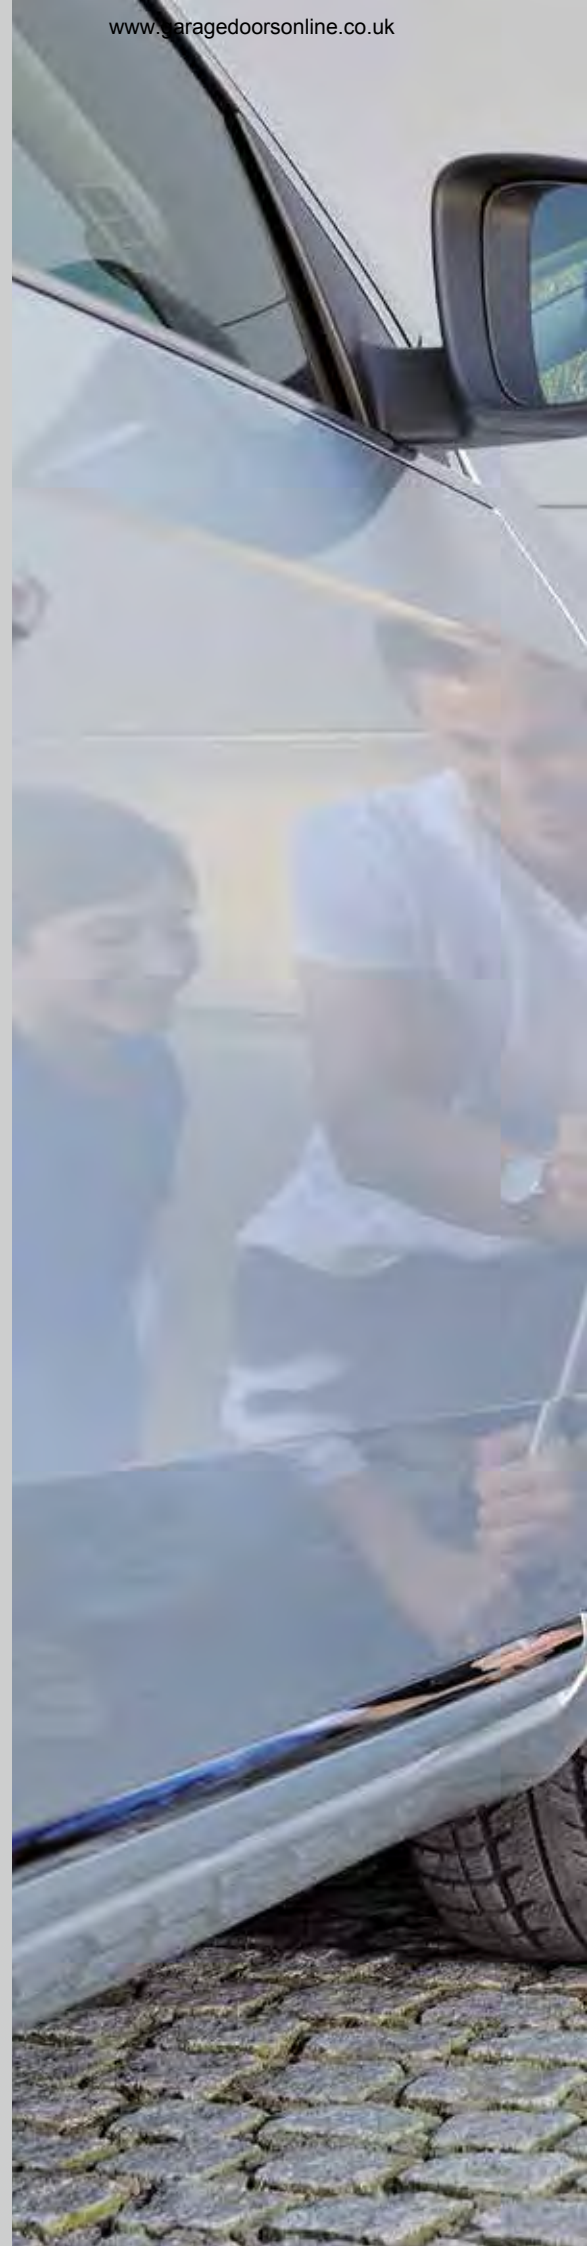



## GOOD REASONS TO TRY HÖRMANN

“A good reputation must be earned.”



August Hörmann

In line with the founder's philosophy, the Hörmann brand today is a true promise of quality. The family-owned company has over 80 years of experience in door and operator construction and, with sales of over 20 million doors, is no. 1 in Europe. This makes a Hörmann sectional door a reassuring purchase.



# 1 Brand quality “Made in Germany”

All doors and operator components are developed and manufactured by Hörmann, are **perfectly matched to each other** and **tested and certified** by independent, recognised institutes to ensure your safety. They are manufactured in Germany according to the DIN ISO 9001 quality management system and meet the requirements of European standard 13241-1. Furthermore, our highly qualified employees work intensively on new products, continual further developments and improvements to details. The results are patents and one-of-a-kind products you can depend on.

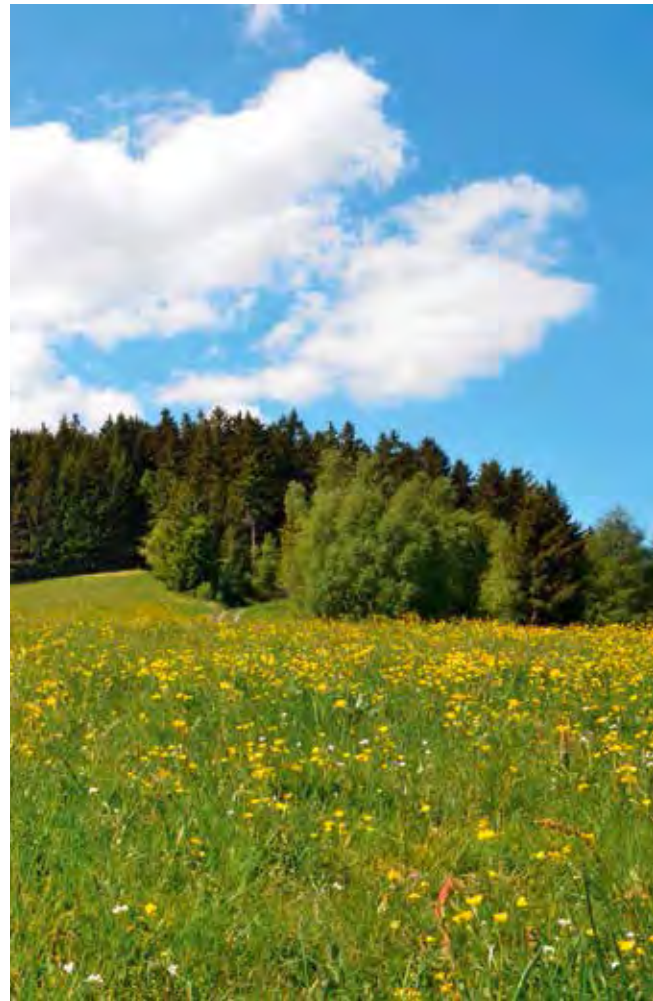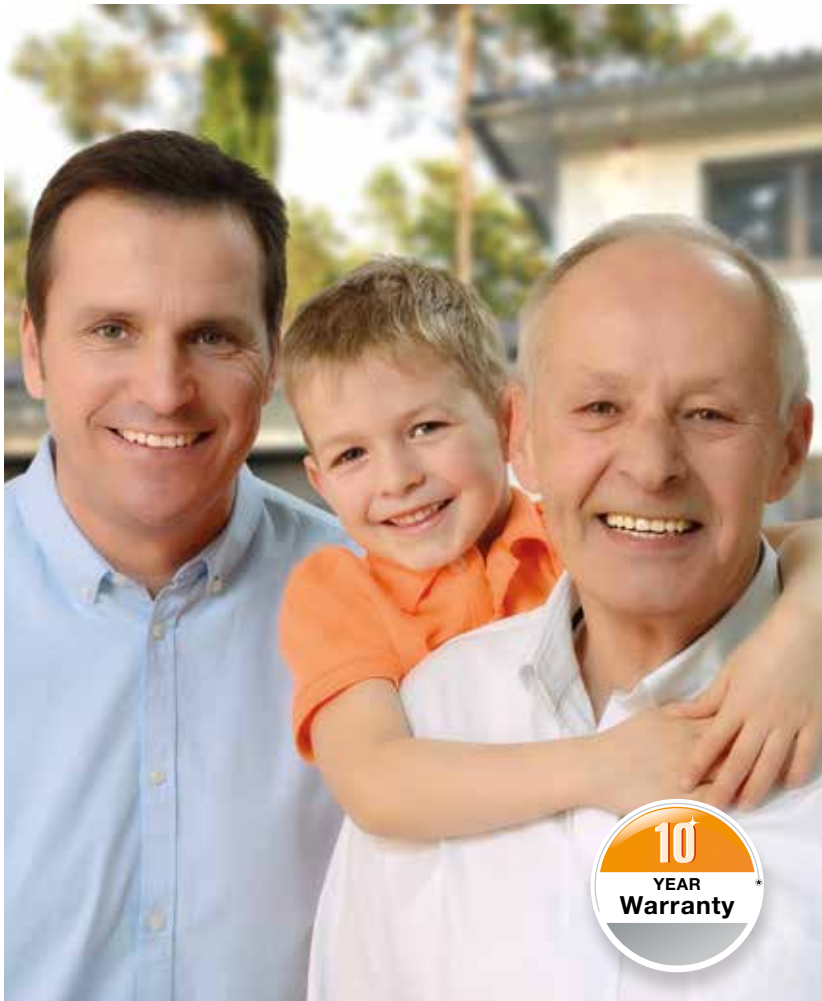

## 2 Garage doors for generations


Endurance tests under real-life conditions ensure mature series products with Hörmann quality. Thanks to this, as well as excellent technical solutions and uncompromising quality assurance, you receive a **10-year warranty on all Hörmann sectional doors and a 5-year warranty on Hörmann operators.\***

\* The complete warranty conditions can be found at:  
[www.hoermann.com](http://www.hoermann.com)

## 3 An eye on the future

Hörmann is setting a good example. This is why the company obtains **100 % of its required energy from green sources**. At the same time, many tonnes of CO<sub>2</sub> are saved each year thanks to the introduction of an intelligent and certified energy management system. And last but not least, Hörmann offers products for sustainable construction.

## GOOD REASONS TO TRY HÖRMANN

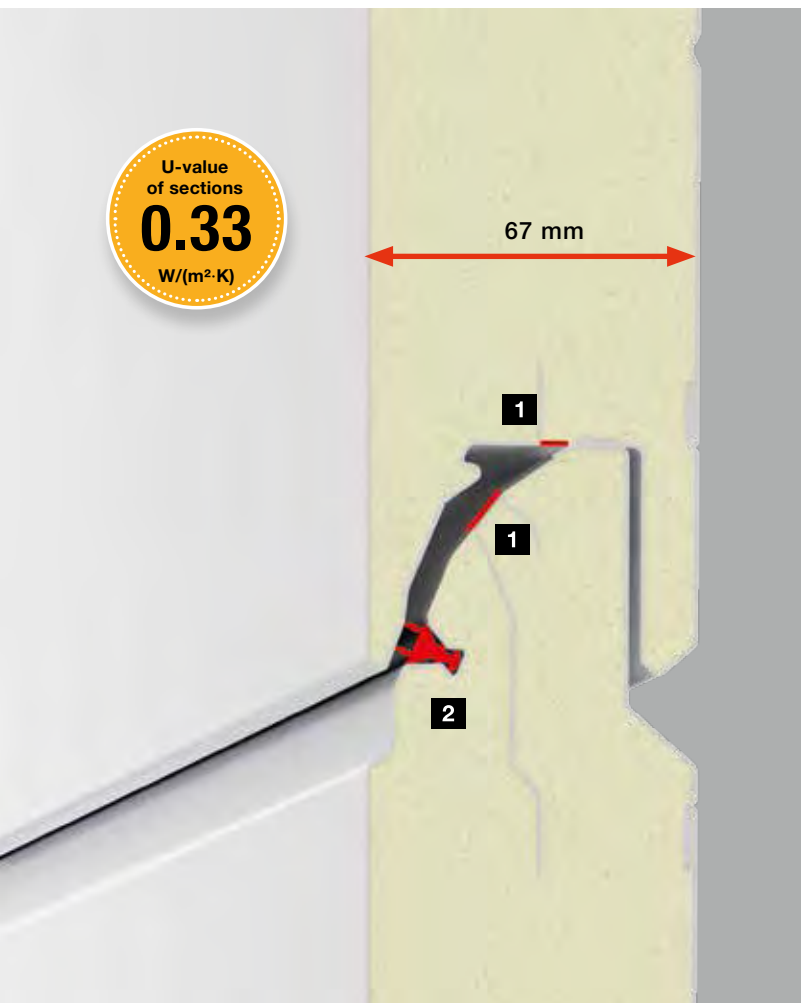


## 4 Modern energy-saving door

Double-skinned sectional doors are particularly recommended for garages attached directly to the house. In addition to the LPU 42 with very good thermal insulation, the **LPU 67 Thermo ■ NEW** offers everything that is expected from modern construction: **excellent thermal insulation achieved by sections with thermal break 1** with a U-value of  $0.33 \text{ W}/(\text{m}^2 \cdot \text{K})^*$ , a very good seal on spaces between sections with double lip seals **2** and an optimum floor connection using double bottom seals, which also compensate for floor unevenness and energy losses.

\* U-value of door (5000 x 2125 mm) =  $1.0 \text{ W}/(\text{m}^2 \cdot \text{K})$

## 5 Efficient Thermal Insulation



With the **Hörmann ThermoFrame** you can improve the already high insulation values, especially of the double-skinned sectional doors. The black plastic profile is fitted together with the door frame. **Insulation is improved by 15 %\*\*** thanks to the thermal break between the frame and brickwork. The optional ThermoFrame frame connection is available for all Hörmann sectional doors.

\*\* For a double-skinned sectional garage door LPU 42 size 5000 x 2125 mm



## 6 Optimum long-term protection



A non-brittle, 4 cm **plastic frame shoe** covers the frame where it is prone to rusting and offers **long-term protection against corrosion**, even with waterlogging, which is unmatched by competitor solutions. Together with the door's bottom seal, the frame shoe makes for a bottom edge that is visually appealing.

## 7 Exclusive interior door view

Anyone who uses their garage as a hobby room wants a harmonious door view in the garage too. **The premium version of the LPU 67 Thermo ■ NEW** meets these precise demands: the full frame\*\*\*, the tracks and connection rails and all fittings are available in Grey white RAL 9002, matching the inside of the door leaf. **The door thereby blends harmoniously into the interior and** adds value to your garage. The tandem track rollers also mean that your door runs very quietly and smoothly.

\*\*\* Outside view of the frame in Grey white RAL 9002, meaning that a frame covering is recommended for doors in Traffic white RAL 9016.

## GOOD REASONS TO TRY HÖRMANN




## 8 A harmonious overall appearance

### 1 Even spacing and invisible section transitions for ribbed doors

Hörmann garage doors are distinguished by even, exact spacing of sections [A]. The sections are shaped so that the transitions are practically invisible when the door is closed. See for yourself!

To add to the overall appearance, a practical side door with an alignment matching the sectional garage doors is also available (see page 54).

2 Irregular spacing of sections [B], [C] due to different section heights coupled with visible section transitions on competitor doors. This gives the door an uneven look.

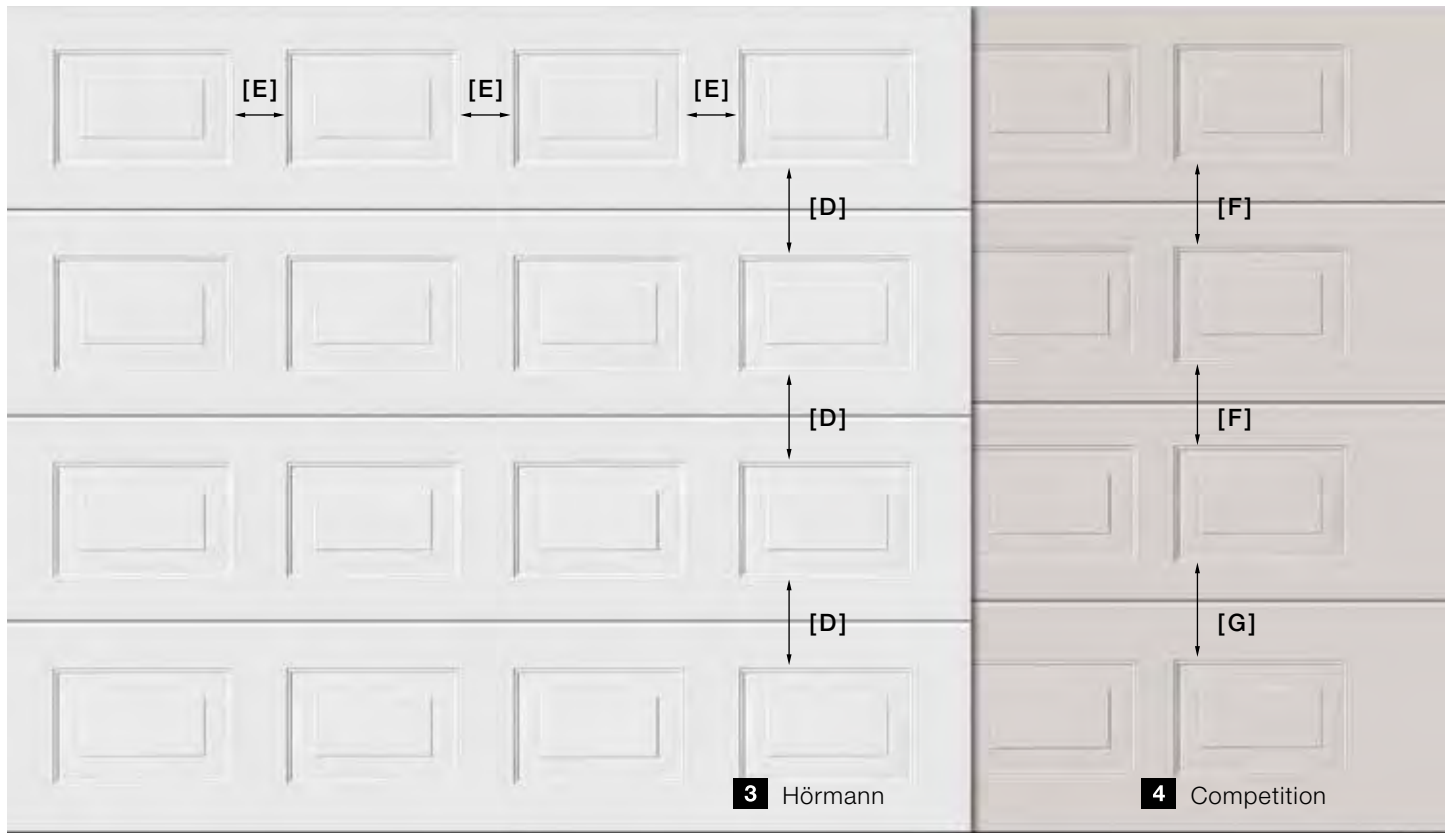


### **3 Uniformly divided panelled doors**

To create a harmonious overall appearance, the height of the spaces between the individual panels **[D]** of Hörmann sectional doors is exactly even. This is achieved by using sections with the same height across the entire door height. The horizontal spacing between the panels within a section **[E]** is also uniform. This gives the doors an even appearance.


On request, side doors are also available with the same section spacing as the sectional garage door (see page 54).

**4 Irregular panel spacing [F], [G]** due to different section heights on competitor doors. This gives the door an uneven look.

## GOOD REASONS TO TRY HÖRMANN

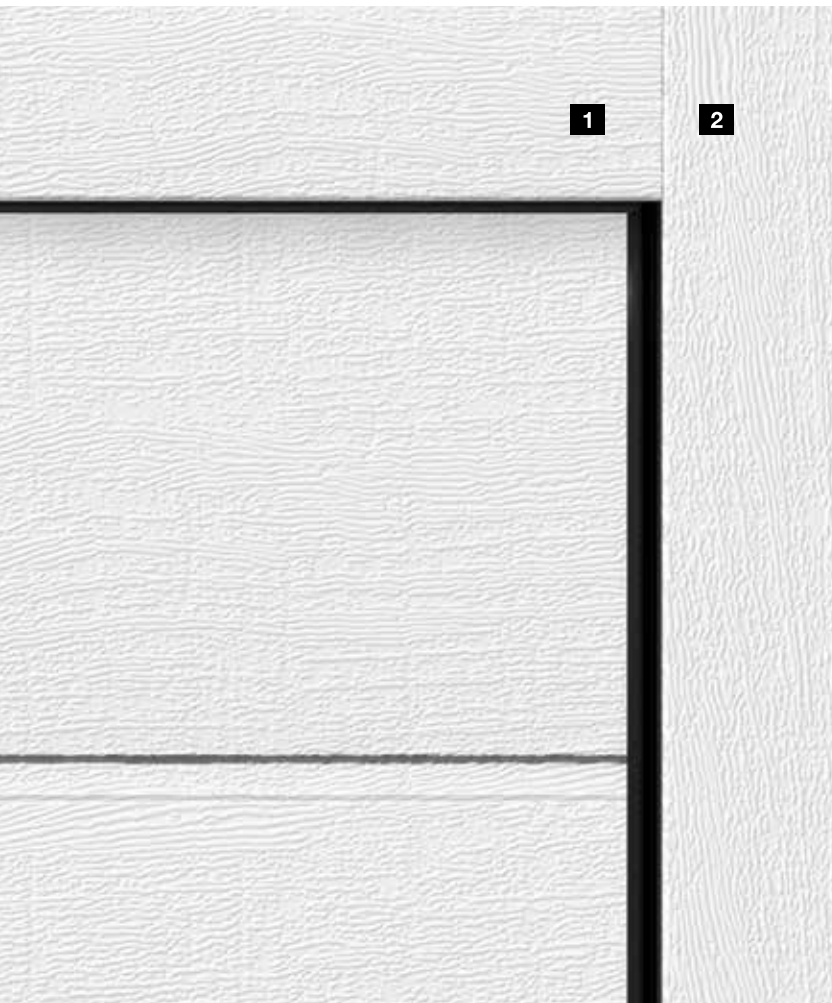

## 9 Matching appearance of frames and door leaves



The **harmonious appearance of a door** is the result of many small details: For white doors and all surface finishes, the fascia panel **1** is always provided matching the door sections. This ensures that everything fits together. The side frames **2** are available with a white Woodgrain surface finish\* as standard. For sectional doors with the surface finishes Sandgrain, Silkgrain or Decograin as well as coloured doors, the frame coverings are optionally available in the surface finish of the door section. For Micrograin doors, the frame covering is provided with a smooth Silkgrain surface finish.


For further information, please see pages 59-60.

\* For LPU 67 Thermo in the premium version in Grey white RAL 9002


## 10 Flush-fitting fascia panels

For LPU 42 doors, a flush-fitting fascia panel is the **most elegant solution for an invisible transition** between the panel and door leaf. When the door is closed, the top door section is flush with the panel.

For further information, please see page 59.

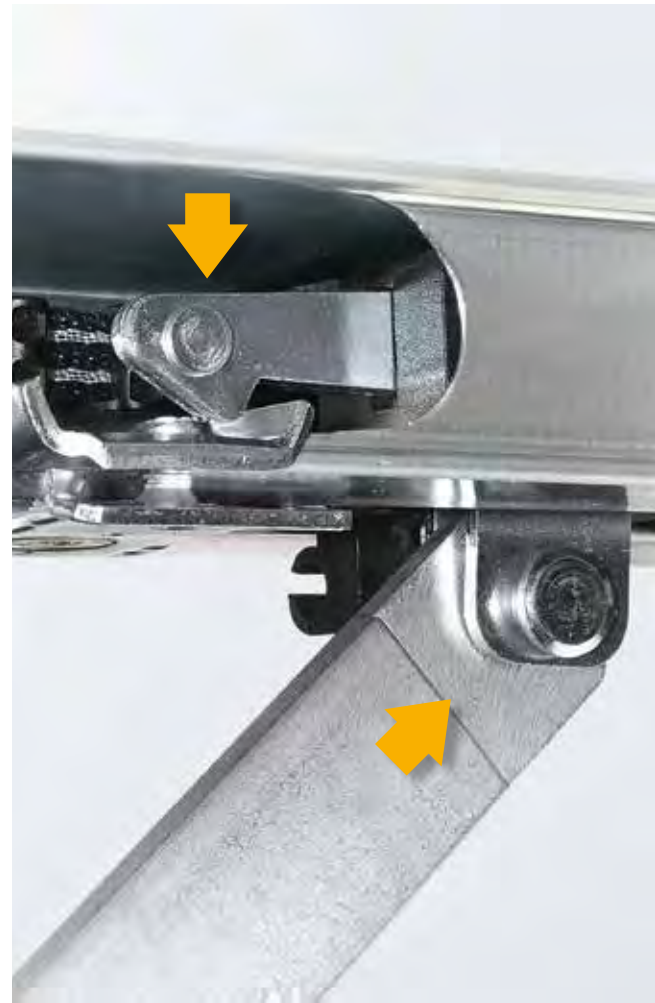


## 11 Practical solutions



An LPU 42 door with wicket doors are recommended for easy passage **with a trip-free threshold** into your garage. You can also retrieve bicycles or gardening equipment from your garage without opening the door.

The stainless steel threshold is only 10 mm in the centre and 5 mm high at the sides. This makes it easier to wheel things through and reduces the risk of tripping up.

## 12 More security, of course



Mechanical anti-lift kit

Uninvited guests barely stand a chance with Hörmann's automatic sectional doors. When the garage door is closed, the **anti-lift kit** automatically engages in the operator boom's stop, then **locks immediately and is secured against forced opening**. This patented door locking functions purely mechanically and, in contrast to competitor operators, continues to secure the door even when the power fails.



Take a look at the video at:  
[www.hoermann.com/videos](http://www.hoermann.com/videos)



## GOOD REASONS TO TRY HÖRMANN



# 13

## BiSecur radio system with certified security



The bi-directional BiSecur radio system is based on future-oriented technology for the convenient and secure operation of garage and entrance gate operators, door operators, lighting and more. This extremely secure BiSecur encryption protocol, developed by Hörmann, with a stable, interference-free range makes sure that no-one can copy your radio signal. It was tested and certified by security experts at Bochum University.



Take a look at the video at:  
[www.hoermann.com/videos](http://www.hoermann.com/videos)



## Perfectly matched and 100 % compatible

**All BiSecur operators, receivers and control elements are 100 % compatible.** Using a hand transmitter or radio code switch, for example, you can conveniently operate your garage door as well as entrance gate equipped with a Hörmann operator, your door operators or other devices with BiSecur receivers.

With our app\* and Hörmann BiSecur Gateway, you can operate your Hörmann garage door or entrance gate operators, Hörmann entrance door\*\* or the internal door operator PortaMatic as well as other devices **using your smartphone or tablet.**

\* For smartphones or tablets with iOS or Android operating systems.

\*\* To use this function it is required that your Hörmann entrance door ThermoCarbon / ThermoSafe is equipped with the automatic lock S5 / S7 Smart.



## 14 Convenient querying of the door position

**You no longer have to go out in all kinds of weather** to check if your gate is closed. At the press of a button, the colour of the LED on the HS 5 BS hand transmitter indicates the position of the door. If required, another push of a button\*\*\* closes the gate. It is the most comfortable and secure way to control your door.

\*\*\* An additional photocell is required for operation without visual contact to the door.

## 15 Award-winning design

In addition to a black or white design, the **exclusive BiSecur hand transmitters** are characterised by an elegant shape that fits easily in the palm of your hand.

Hörmann's BiSecur hand transmitters with an optional high-gloss surface in a piano lacquer look have received the reddot design award for their exclusive design.



Take a look at the video at:  
[www.hoermann.com/videos](http://www.hoermann.com/videos)



Figure above: hand transmitter HS 5 BS with hand transmitter station (optional).

## OVERVIEW OF STEEL SECTIONAL DOORS

## LPU 67

## Thermo

■ **NEW**

The energy-saving door impresses thanks to 67-mm-thick sections with thermal break achieving excellent thermal insulation.


## LPU 42

The double-skinned LPU 42 door offers very good insulation with its 42-mm-thick sections.


## LTE 42

The single-skinned LTE 42 door is the inexpensive solution for detached garages that do not require additional thermal insulation.




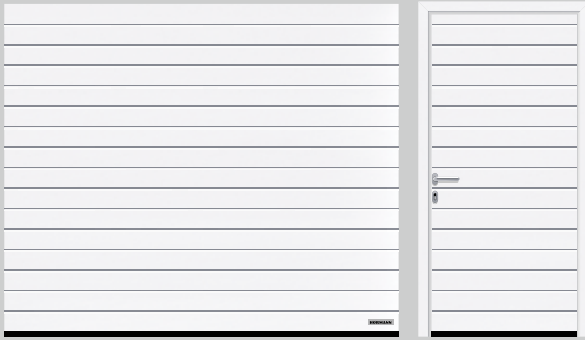


S-ribbed (LPU 42, LTE 42), Traffic white RAL 9016

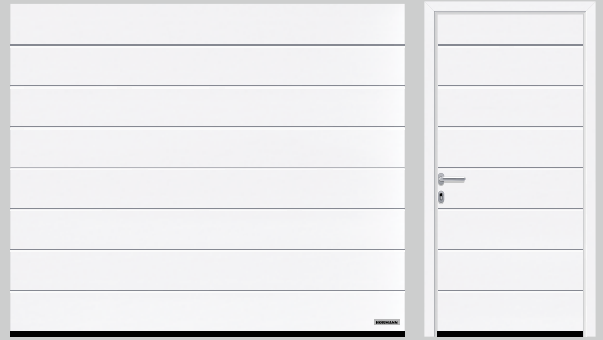

M-ribbed (LPU 67 Thermo, LPU 42, LTE 42), Traffic white RAL 9016

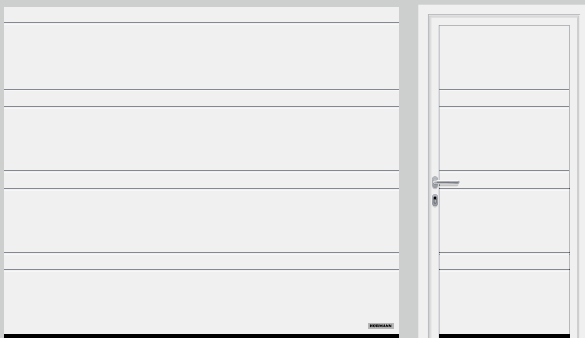

D-ribbed (LPU 42), Traffic white RAL 9016

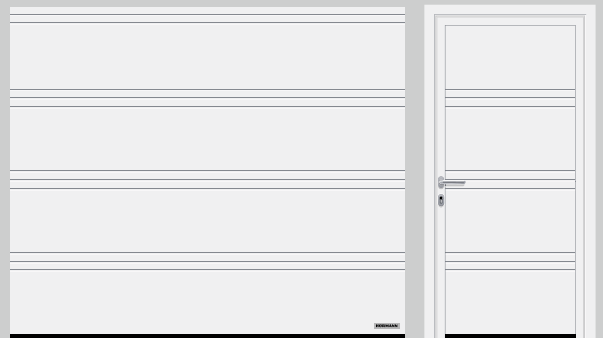

T-ribbed (LPU 42), Traffic white RAL 9016




L-ribbed (LPU 67 Thermo, LPU 42), Traffic white RAL 9016



Panelled (LPU 42, LTE 42), Traffic white RAL 9016



## OVERVIEW OF STEEL SECTIONAL DOORS

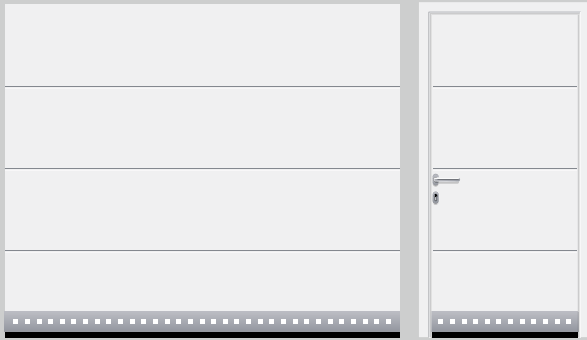


L-ribbed (LPU 67 Thermo, LPU 42), style 450, Traffic white RAL 9016



L-ribbed (LPU 67 Thermo, LPU 42), style 456, Traffic white RAL 9016

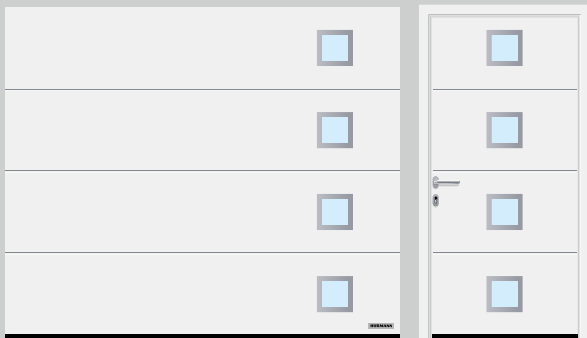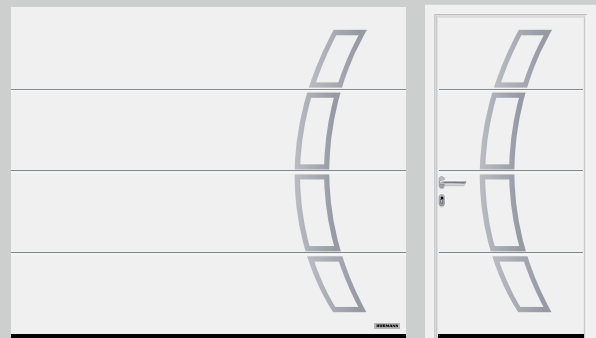L-ribbed (LPU 67 Thermo, LPU 42), style 461 with glazing,  
Traffic white RAL 9016 style 451 without glazing (not shown)

L-ribbed (LPU 67 Thermo, LPU 42), style 457, Traffic white RAL 9016

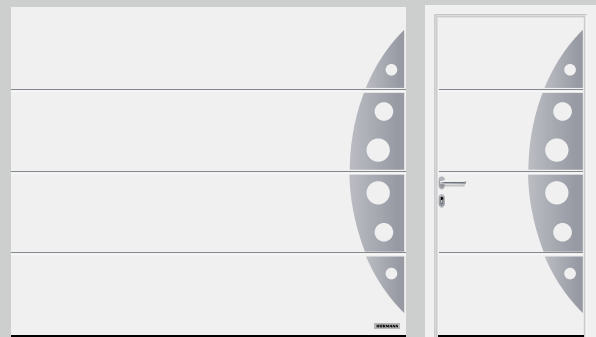L-ribbed (LPU 67 Thermo, LPU 42), style 462 with glazing,  
Traffic white RAL 9016 style 452 without glazing (not shown)

L-ribbed (LPU 67 Thermo, LPU 42), style 458, Traffic white RAL 9016




L-ribbed (LPU 67 Thermo, LPU 42), style 454, Traffic white RAL 9016


L-ribbed (LPU 67 Thermo, LPU 42), style 469 with glazing,  
Traffic white RAL 9016 style 459 without glazing (not shown)



L-ribbed (LPU 67 Thermo, LPU 42), style 481 with glazing, Traffic white RAL 9016 style 471 without glazing (not shown)

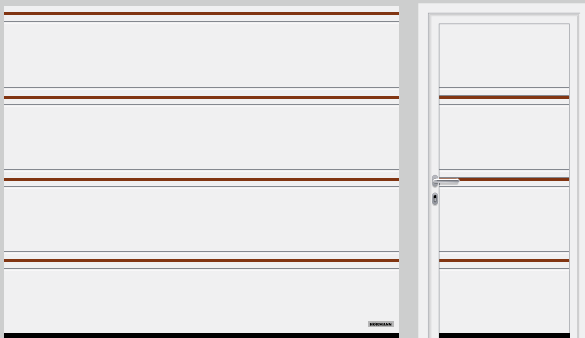


T-ribbed (LPU 42) style 501 with continuous inlays in stainless steel or timber look (Fig.), or RAL to choose, Traffic white RAL 9016

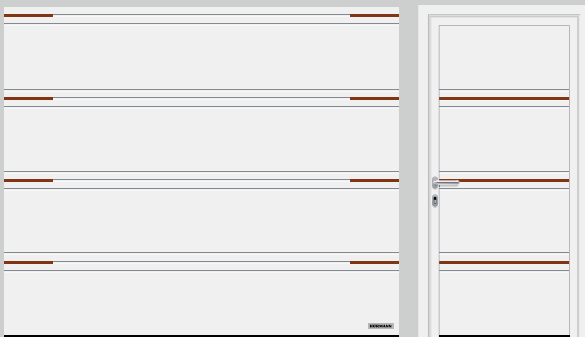

T-ribbed (LPU 42) style 500 with divided inlays in stainless steel or timber look (Fig.), Traffic white RAL 9016

## Individual design styles

You can individually position and combine the design elements on your door to create your own door style. You can design your own door style. Doors with a wicket door are also available with design elements. Your Hörmann partner would be pleased to advise you.



Design element with stainless steel and synthetic glazing

## Special accent with inlays


T-ribbed doors are available in two inlay versions: continuous inlays run along the whole door width, while divided inlays, each 435 mm wide, are positioned on the left and right edges of the door. The inlays are available in stainless steel or timber look as well as RAL to choose.



T-ribbed with inlays in stainless steel look



T-ribbed with inlays in timber look




T-ribbed with inlays in RAL to choose (Fig. shows inlay in RAL 6018)


## OVERVIEW OF SOLID TIMBER SECTIONAL DOORS

## LTH 42


Solid timber doors are excellently suited for timber houses or buildings with many timber elements, such as timber framing or facade elements.

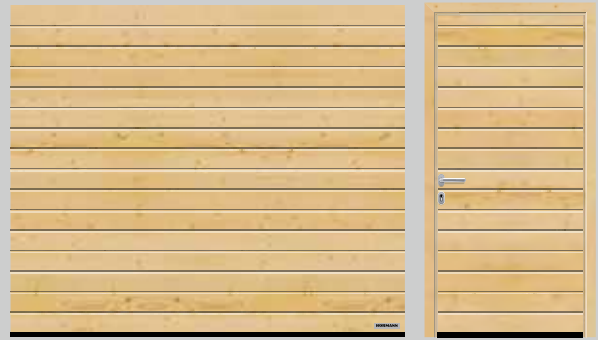

S-ribbed, Nordic Pine

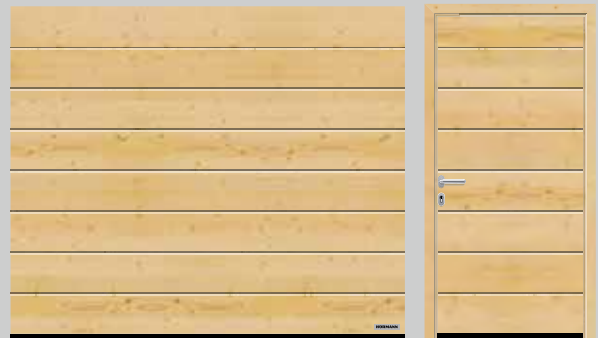

M-ribbed, Nordic Pine

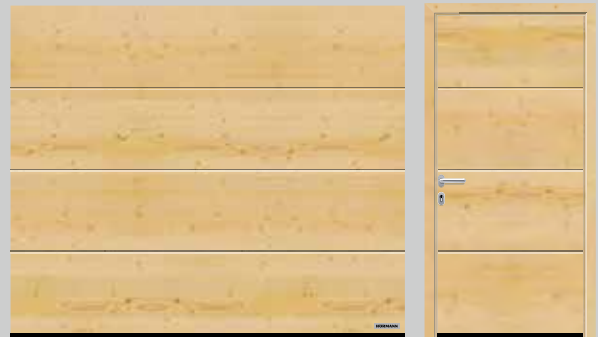


L-ribbed, Nordic Pine




Panelled, Nordic Pine




Style 401, Nordic Pine

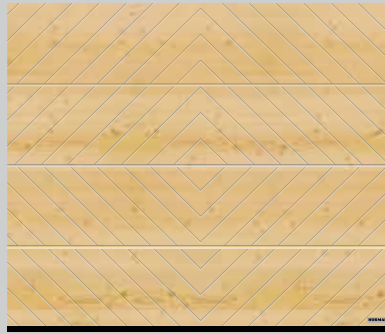

Style 402, Nordic Pine

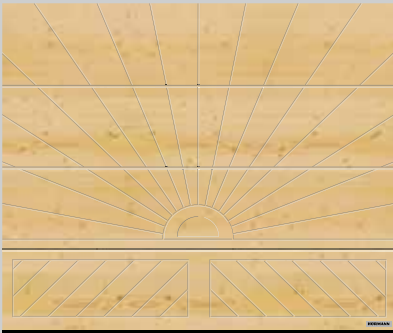

Style 403, Nordic Pine

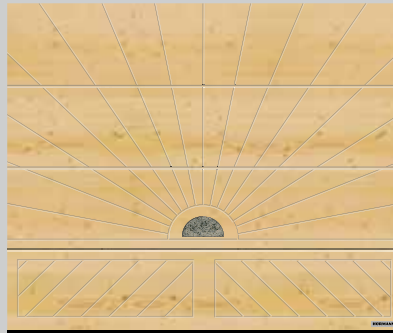


Style 403 with natural stone, Nordic Pine




Style 404, Nordic Pine



Style 404 with natural stone, Nordic Pine

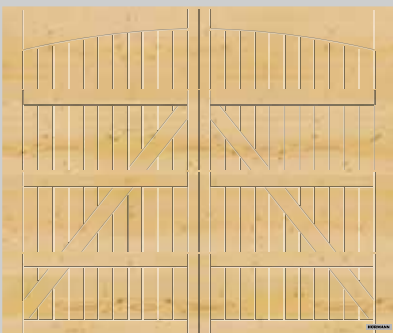

Style 405, Nordic Pine

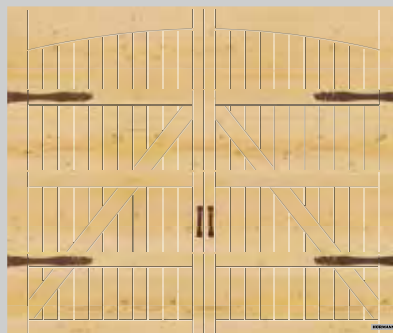Style 405, with optional hinged door fittings  
"Exclusive", Nordic Pine

## Individual designs

Design your own timber door:  
A simple drawing is enough for us to manufacture an individual door for you using a computer-aided mill.

## Setting accents

Choose from 3 natural stones.  
In styles 403 and 404, natural stone is used as an attractive design feature. Variations in colour and structure are a natural characteristic.



Tropical-green



Multicolour-red




Balmoral-rosso

## It's your choice

Design your garage door to exactly fit your needs. For steel sectional doors you can choose from up to 4 surface finishes that you can adapt to match the colour of your home. Or choose one of 6 Decograin decors with a natural timber look or a decor with an elegant metallic effect.

Solid timber sectional doors come in two types of timber that can be individually painted with one of 8 coloured varnishes.

### Steel surface finishes

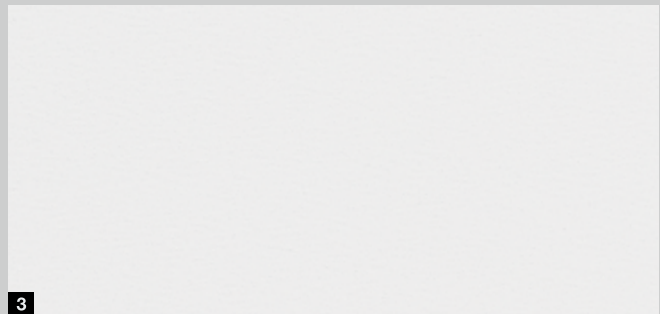**1****2****3****4****5**

## Types of timber



### 1 Woodgrain

On this inexpensive, robust surface with an authentic sawn timber look, minor scratches can be easily repaired by working with the texture. This surface finish is available in Traffic white RAL 9016, in 15 preferred colours or in RAL to choose.

### 2 Sandgrain

The finely structured surface is an ideal choice for price-conscious owners and is particularly suited for modern homes. Available in Traffic white RAL 9016 and in 3 preferred colours.

### 3 Silkgrain

Thanks to its elegant door appearance, the silky smooth Silkgrain surface finish is the first choice for modern architecture. A 50 % thicker exterior sheet on the sections also ensures higher stability and even smoother running. This surface finish is available in Traffic white RAL 9016, in 15 preferred colours or in RAL to choose.

### 4 Micrograin

This surface features a wave profile that is embossed into smooth steel, producing attractive light and shadow effects. It is available in RAL 9016, in 15 preferred colours or in RAL to choose.

### 5 Decograin

Decograin surface finishes with UV-resistant plastic film coating give your sectional door a striking and authentic timber look or an elegant metallic appearance in Anthracite. You can select from 5 natural timber decors or an elegant metallic decor.




### 6 Nordic Pine

Nordic Pine is a light-coloured softwood with predominantly straight graining. Heart shakes, individual resin pockets, spiral graining and the yellowish brown "knots" are natural characteristics of the wood.

### 7 Hemlock

Hemlock is a greyish white to light-greyish brown softwood with predominantly straight grain, brown mineral stripes along the grain with bark pockets.

## GENERAL OVERVIEW



S-ribbed

M-ribbed

L-ribbed

LPU 67 Thermo ■ **NEW**

## Double-skinned steel sectional doors

|             |  |                                                                 |                                                                 |
|-------------|--|-----------------------------------------------------------------|-----------------------------------------------------------------|
| Silkgrain   |  | Traffic white RAL 9016<br>15 preferred colours<br>RAL to choose | Traffic white RAL 9016<br>15 preferred colours<br>RAL to choose |
| Decograin   |  | 3 decors: Golden Oak, Dark Oak,<br>Titan Metallic CH 703        | 3 decors: Golden Oak, Dark Oak,<br>Titan Metallic CH 703        |
| Max. width  |  | 5000 mm                                                         | 5000 mm                                                         |
| Max. height |  | 3000 mm                                                         | 3000 mm                                                         |

## LPU 42

## Double-skinned steel sectional doors


|             |                                                                 |                                                                                                  |                                                                                                  |
|-------------|-----------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Woodgrain   | Traffic white RAL 9016<br>15 preferred colours<br>RAL to choose | Traffic white RAL 9016<br>15 preferred colours<br>RAL to choose                                  | Traffic white RAL 9016<br>15 preferred colours<br>RAL to choose                                  |
| Sandgrain   |                                                                 | Traffic white RAL 9016<br>3 preferred colours                                                    | Traffic white RAL 9016<br>3 preferred colours                                                    |
| Micrograin  |                                                                 |                                                                                                  | Traffic white RAL 9016<br>15 preferred colours<br>RAL to choose                                  |
| Silkgrain   |                                                                 | Traffic white RAL 9016<br>15 preferred colours<br>RAL to choose                                  | Traffic white RAL 9016<br>15 preferred colours<br>RAL to choose                                  |
| Decograin   |                                                                 | 6 decors: Golden Oak, Dark Oak,<br>Night Oak, Rosewood, Winchester<br>Oak, Titan Metallic CH 703 | 6 decors: Golden Oak, Dark Oak,<br>Night Oak, Rosewood, Winchester<br>Oak, Titan Metallic CH 703 |
| Max. width  | 6000 (7000*) mm                                                 | 6000 (7000*) mm                                                                                  | 6000 (7000*) mm                                                                                  |
| Max. height | 3000 (5000*) mm                                                 | 3000 (5000*) mm                                                                                  | 3000 (5000*) mm                                                                                  |

## LTE 42

## Single-skinned steel sectional doors

|             |                        |                        |  |
|-------------|------------------------|------------------------|--|
| Woodgrain   | Traffic white RAL 9016 | Traffic white RAL 9016 |  |
| Max. width  | 5000 mm                | 3000 mm                |  |
| Max. height | 3000 mm                | 3000 mm                |  |


\* As sectional door SPU F42 Plus (for further information, see pages 72 / 73)



panel

Detailed size ranges can be found on page 80.


## GENERAL OVERVIEW



S-ribbed



M-ribbed




L-ribbed

## LTH

## Solid timber sectional doors

|             |                              |                              |                              |
|-------------|------------------------------|------------------------------|------------------------------|
| Nordic Pine | 8 types of wood preservative | 8 types of wood preservative | 8 types of wood preservative |
| Hemlock     | 8 types of wood preservative | 8 types of wood preservative | 8 types of wood preservative |
| Max. width  | 5000 mm                      | 5000 mm                      | 5000 mm                      |
| Max. height | 3000 mm                      | 3000 mm                      | 3000 mm                      |



Panel

## LTH

## Solid timber sectional doors

|             |                              |  |  |
|-------------|------------------------------|--|--|
| Nordic Pine | 8 types of wood preservative |  |  |
| Hemlock     | 8 types of wood preservative |  |  |
| Max. width  | 5000 mm                      |  |  |
| Max. height | 3000 mm                      |  |  |

**Please note:**

Detailed size ranges can be found on page 80.



## S-RIBBED



▲ S-ribbed in Woodgrain Anthracite grey RAL 7016; Hörmann aluminium entrance door ThermoSafe, style 650 Anthracite grey RAL 7016



▼ S-ribbed in Woodgrain in Traffic white RAL 9016  
with matching side door



▲ S-ribbed with solid timber panels in Hemlock  
with side door in matching appearance

## M-RIBBED



► M-ribbed in Silkgrain Traffic white RAL 9016 with LED light strip on lintel and light key switch posts SLS





▲ M-ribbed in Silkgrain Anthracite grey RAL 7016;  
Hörmann aluminium entrance door ThermoSafe,  
style 861 Anthracite grey RAL 7016

◀ M-ribbed in Decograin Titan Metallic CH 703 as  
industrial sectional door SPU F42 Plus for garages  
up to 7000 mm wide (for further information, see  
pages 76 / 77)

## L - RIBBED



▲ L-ribbed in Decograin Titan Metallic CH 703 as industrial sectional door SPU F42 Plus for garages up to 7000 mm wide (for further information, see pages 76 / 77)

► L-ribbed in Decograin Titan Metallic CH 703



For further information on Hörmann entrance doors, see the Entrance Doors brochure.





▼ L-ribbed design style 457 in Silkgrain Traffic white RAL 9016;  
Hörmann aluminium entrance door ThermoSafe style 188



## D-RIBBED / T-RIBBED

► T-ribbed in Silkgrain Anthracite grey RAL 7016 style 501  
with continuous inlays in stainless steel look

▼ D-ribbed in Silkgrain Anthracite grey RAL 7016;  
Hörmann aluminium entrance door ThermoCarbon,  
style 304 Anthracite grey RAL 7016





▲ T-ribbed style 501 in Silkgrain Stone grey RAL 7030 with continuous inlays in timber look

## PANEL



▲ Panelled with solid timber panels in Hemlock with wood preservative in Limestone white

► Panelled in Decograin Golden Oak





◀ Panel in Woodgrain Traffic white RAL 9016;  
Hörmann aluminium entrance door ThermoSafe  
style 449 in Traffic white RAL 9016



## ALR F42 FOR EXCLUSIVE DOOR AESTHETICS

## Exclusive facade designs

With on-site, flush-fitting facade cladding, you can design your sectional door according to your wishes with timber, metal, ceramic, plastic and many other materials. This way your garage door is seamlessly integrated into the overall design of your home.

The door basis for facade cladding is a Hörmann industrial sectional door ALR F42 with an aluminium frame construction and PU sandwich infill. Please consult with your local Hörmann specialised dealer.

► Sectional door ALR F42 with on-site cladding

▼ Sectional door ALR F42 with on-site cladding





◀ Sectional door ALR F42 Vitraplan

### ALR F42 Vitraplan

The door is especially elegant thanks to offset, flush-fitting glazing. The frame profile is concealed, so nothing detracts from the overall appearance. This exclusive door fascinates with a mix of mirroring and transparency.

## DESIGN SOLID TIMBER DOORS

► Door style 405, painted white on-site with hinged door fitting kit and decorative handles

▼ Door style 403 in Nordic Pine with tropical green natural stone



◄ Door style 402 in Nordic Pine with a matching side door





### Individual designs

Design your timber door to, for example, display your initials, house number or your favourite motif. Just provide us with an appropriate drawing and we will create a personal garage door for you. It will be an enviable original.

## COLOUR

## A bright variety

No matter the architectural style, with Hörmann, you are guaranteed to find a sectional garage door to fit your personal style and home. For steel sectional doors, you can choose from 15 equally-priced preferred colours, approx. 200 RAL colours and 6 Decograin decors. The door surfaces are optimally protected against rust allowing you to enjoy your new door for a long time. Rain runs off without leaving any streaky marks thanks to the use of hot-galvanized material and a high-quality polyester-primer coating on both sides. Solid timber doors are available in two types of timber, each of which can be glazed in one of 8 colours to match your home.





## COLOUR

# Beautiful and protective colour

Double-skinned LPU sectional doors and side doors are available as standard in Traffic white, RAL 9016, as well as in 15 inexpensive preferred colours and in around 200 colours from the RAL colour chart \*, as well as in many NCS and DB colours. You can choose from 3 preferred colours\*\* for the surface finish Sandgrain.

Single-skinned LTE 42 doors are only available in Traffic white.

## Standard colour



## 15 preferred colours



### Please note:

Sectional garage doors are generally supplied in Grey white, RAL 9002 on the inside of the door.

Dark colours should not be used for double-skinned steel doors that are exposed to the sun, as possible section deflection may damage the door.

All colours based on RAL.

The colours and surfaces shown are subject to the limitations of the printing process and cannot be regarded as binding. Please consult with your local Hörmann specialised dealer.

\* RAL Classic colours, with the exception of pearl-effect, fluorescent and metallic colours


\*\* Preferred colours for Sandgrain surface finish

|    |          |                    |
|----|----------|--------------------|
| 1  | RAL 9016 | Traffic white      |
| 2  | RAL 9007 | Grey aluminium     |
| 3  | RAL 9006 | White aluminium**  |
| 4  | RAL 8028 | Terra brown**      |
| 5  | RAL 8003 | Clay brown         |
| 6  | RAL 8001 | Ochre brown        |
| 7  | RAL 7040 | Window grey        |
| 8  | RAL 7035 | Light grey         |
| 9  | RAL 7030 | Stone grey         |
| 10 | RAL 7016 | Anthracite grey ** |
| 11 | RAL 6009 | Fir green          |
| 12 | RAL 6005 | Moss green         |
| 13 | RAL 5014 | Pigeon blue        |
| 14 | RAL 5011 | Steel blue         |
| 15 | RAL 3003 | Ruby red           |
| 16 | RAL 1015 | Light ivory        |

# Elegance and detailed accuracy

Decograin is available in five natural-looking timber designs and with an anthracite metallic effect. An embossed wood grain gives it an authentic timber character. The door remains beautiful for a long time thanks to the special surface protection of the UV-resistant plastic film coating on the outside of the steel sections.

## 6 Decograin decors

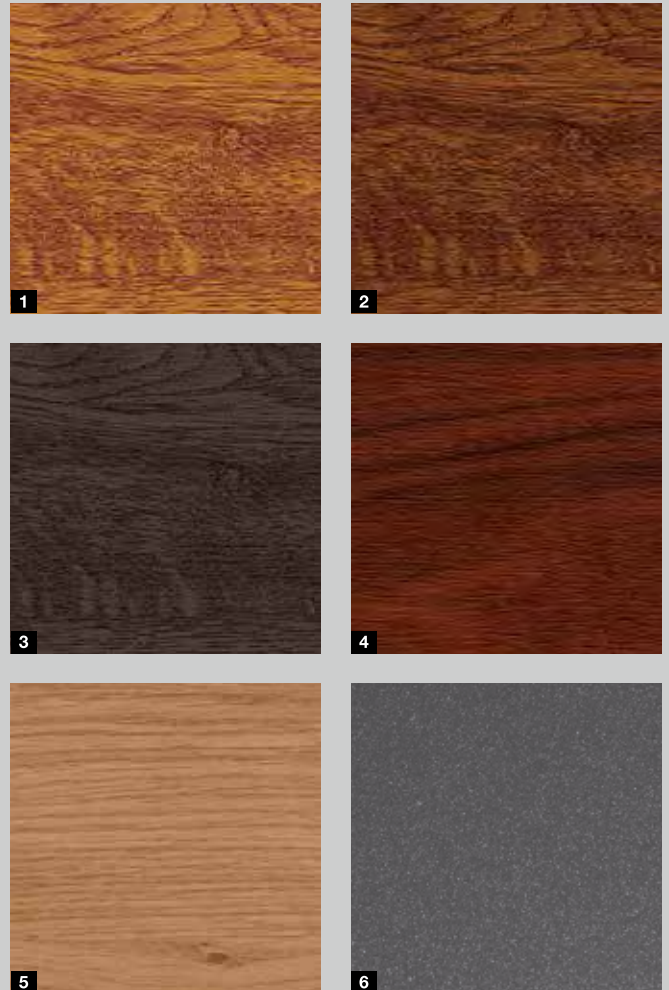

- 1** Decograin Golden Oak: medium brown, golden yellow oak design
- 2** Decograin Dark Oak: walnut-coloured oak decor
- 3** Decograin Night Oak: dark, intense oak design\*
- 4** Decograin Rosewood: mahogany-coloured timber design\*
- 5** Decograin Winchester Oak: natural-coloured knotty oak design\*
- 6** Titan Metallic CH 703: Anthracite with a metallic effect

\* Not for LPU 67 Thermo

## COLOUR

## Natural types of solid timber

Nordic Pine is a light-coloured softwood with predominantly straight graining. Heart shakes, individual resin pockets, spiral graining and the yellowish brown “knots” are natural characteristics of the wood.

Hemlock is a greyish white to light-greyish brown softwood with predominantly straight grain, brown mineral stripes along the grain with bark pockets.

**Please note:**

The timber is impregnated at the factory to protect it against insect and fungal attack. To protect it from weathering and retain its beautiful appearance, please treat the timber with a wood preservative.

With wood preservatives, the wood content may show through the coating, leading to a change in the surface colour.





## 2 types of solid timber




1



2

## 8 types of wood preservative



3



4



5



6



7



8



9



10

- 1 Nordic Pine, impregnated
- 2 Hemlock, impregnated
- 3 Limestone white, painted or opaque
- 4 Pine
- 5 Teak
- 6 Rosewood
- 7 Ebony
- 8 Agate grey
- 9 Fir green
- 10 Nordic red

## MANUAL RELEASE

## Aesthetic, understated, secure

If your garage does not have a second entrance, you can optionally open your automatic garage door LPU 42, LTE 42 and LTH 42 from the outside with a beautifully designed handle or an understated emergency release lock.




**Please note:**




1




2



3



4



5



6



7

## Door handles

Hörmann door handles are set apart by a contemporary, modern shape. Here, the selection of material is not just a question of personal taste. For example, stainless steel handles are particularly robust and have a tough surface finish.

The lock can be integrated in the home locking system. Manually operated doors with a handle are locked and break-in-resistant with a latch lock **7**. In this lock, a sturdy, automatic latching disc engages around a massive bolt on the side frame.

## Emergency release


If you do not want a handle on your automatic sectional door, we recommend using an emergency release lock **6** on garages without a second entrance. An inconspicuous round cylinder (cannot be integrated in the home locking system) releases your garage door and you can easily open it in the case of an emergency.

For automatic sectional doors with a handle, you can use a lever handle to operate the emergency release. The door is then unlocked via a Bowden cable on the inside.

For sectional doors LPU 42, LTE 42 and LTH 42

- 1 Black plastic
- 2 White cast aluminium, RAL 9016
- 3 Silver cast aluminium
- 4 Brushed stainless steel
- 5 Brown cast aluminium, RAL 8028
- 6 Emergency release lock
- 7 Latch lock

## GLAZINGS



## More light, less energy consumption

Depending on the door type, you can select from various types of glazings with clear (Fig. right) or textured panes.

Clear synthetic glazing from Hörmann comes as standard with DURATEC glazing.


It offers:

- Maximum scratch resistance
- A permanently clear view
- Improved thermal insulation

**Please note:**

Glazing is also possible in the two bottom door sections after technical inspection.





1



2



3



4



5



6



7



8



9



10

- 1 Glazing type D \*
- 2 Aluminium frames\*\*
- 3 Classic glazing S0 \*
- 4 Classic glazing M0 \*
- 5 Classic glazing L0 \*
- 6 Classic glazing S1
- 7 Classic glazing S2
- 8 Sunrise glazing S10
- 9 Sunrise glazing S60
- 10 V-panelled glazing V0

The glazings shown (1-8, 10) correspond to a door width of 2500 mm.


\* Individual arrangement of glazings is possible

\*\* Rails are possible

Your Hörmann partner would be pleased to advise you about the numerous glazing options.

|                                        | Glazing type D                                            | Aluminium frame                                             | Classic glazing                                           | Sunrise glazing                                           |
|----------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------|
| Design                                 |                                                           |                                                             |                                                           |                                                           |
| S-ribbed                               | ●                                                         | ●                                                           |                                                           |                                                           |
| M-ribbed                               | ●                                                         | ●                                                           | ●                                                         | ●                                                         |
| L-ribbed                               | ●                                                         | ●                                                           | ●                                                         | ●                                                         |
| D-ribbed                               | ●                                                         | ●                                                           |                                                           |                                                           |
| T-ribbed                               | ●                                                         | ●                                                           |                                                           |                                                           |
| panel                                  |                                                           |                                                             | ●                                                         | ●                                                         |
| Glazing frames                         |                                                           |                                                             |                                                           |                                                           |
| Version                                | Plastic (in all colours, also different from door colour) | Aluminium (in all colours, also different from door colour) | Plastic (in all colours, also different from door colour) | Plastic (in all colours, also different from door colour) |
| Clear / textured glazing               |                                                           |                                                             |                                                           |                                                           |
| Single / double pane<br>LPU 42, LTE 42 | ●                                                         | ●                                                           | ●                                                         | ●                                                         |
| Triple pane<br>LPU 67 Thermo           | ●                                                         | ●                                                           | ●                                                         | ●                                                         |

## WICKET DOORS WITH TRIP-FREE THRESHOLD



## An easy passage into your garage

A door in the door lets you easily access whatever you have in your garage, such as gardening tools, bikes or wheelbarrows. Only Hörmann offers a wicket door with a stainless steel threshold that is only 10 mm in the centre and 5 mm high at the sides. This reduces the risk of tripping up and makes it easier to wheel things through. The aluminium door frame is anodised as standard in a natural finish and is also available in all colours. The top garage door section, also in the wicket door area, comes with a continuous lintel seal.

### Please note:

Wicket doors with trip-free threshold are only available for sectional door LPU 42.

On request, Decograin wicket doors can be supplied with the frame painted to match the colour of the decorative finish. The frame is available in all colours, also different from door colour.

In some cases, adjacent panelled doors with the same width, with and without a wicket door, may not have an identical panel division.

Manually-operated garage doors with a wicket door do not have an outside handle. They are locked from the inside.

The optional leading photocell VL 2 stops the door without contact. This further increases the safety of your garage door with wicket door and trip-free threshold.





### 1 Overhead door closers

As standard, wicket doors are supplied with slide rail door closers incl. integrated opening angle limit and hold-open device (top figure). An integrated door closer, including hold-open device (fig. on bottom) is optionally available for optimum protection and the best appearance.



### 2 Optional multiple-point locking

The wicket door is locked over the entire door height with one bolt and hook bolt per section. The advantage: better stability and improved break-in-resistance.



### 3 Robust door catch

This prevents door-leaf drop and buckling.



### 4 Concealed hinges

For a uniform look, the wicket doors are equipped with concealed hinges as standard.

## SIDE DOORS

# A matching side door for every garage door

Design a side entrance to match your garage door.

On request, side doors are also available in the same ribbing or panel division as your sectional door.

## Garage side doors Single-leaf / double-leaf

Hörmann side doors are supplied ready-to-fit with profile cylinder mortise lock, round handle/lever handle set with oval rose escutcheons and with 3-way adjustable hinges. Door leaf frames are made of weather-proof aluminium extrusions (depth 60 mm) with all-round seals. Double-leaf side doors are also available with asymmetrical division i.e. with uneven door leaf widths.




| Garage side door       | Single-leaf      |      | Double-leaf      |
|------------------------|------------------|------|------------------|
|                        | Narrow           | Wide | Wide             |
| Leaf frames            |                  |      |                  |
| Aluminium block frame  | ●                |      | ●                |
| Aluminium corner frame | ●                |      | –                |
| Narrow leaf frame      | ●                |      | –                |
| Wide leaf frame        | ●                |      | ●                |
| Thermal insulation     | U = 2.7 W/(m²·K) |      | U = 2.9 W/(m²·K) |




### 1 Lever handle set

Choose between the standard lever handle or many optional lever handle or lever/knob handle sets (Fig: stainless steel lever handle set). Your Hörmann partner would be pleased to advise you.



### 2 Matching

Decograin side doors come with identical surface finishing for the frame, subframe and door to create a matching appearance. The inside of the sections is Grey white, RAL 9002, as standard.




### 3 Break-in-resistant

The optional 3-point locking for profile type 2 is equipped with a latch, bolt, 2 locking hooks and security rose escutcheon. The double-leaf side door with 3-point locking fulfils break-in resistance class RC 2.




### 4 Insulated version

TopComfort NT80-2 available with door leaf with thermal break, frame and threshold.



## MZ Thermo multi-purpose door

If you highly value good thermal insulation, an MZ Thermo external door with thermal break is the best choice for you. It has an excellent thermal insulation value of  $1.2 \text{ W}/(\text{m}^2 \cdot \text{K})$ . An RC 2 version is optionally available (KSI Thermo).



Additional information can be found in the Function Doors for Your Home brochure.

MODERNISE AND IMPROVE

## Out with the old, in with the new

At some point it is simply time to modernise your garage door. Hörmann can provide you with an attractive and appropriate solution for any fitting situation. Inexpensive standard sizes, especially created for modernisation, will save you money and get you using your new sectional door faster. Your Hörmann partner also provides you with a complete package of services:

- Qualified consultation
- Measurement on-site
- Professional fitting
- Removal and environmentally-friendly disposal





## MODERNISE AND IMPROVE



## Standard fitting

The sectional door can be fitted behind the opening. The reveal guarantees stable fitting. This allows the frame to be screwed directly into the wall behind the opening.

Ideally, the available garage has at least 100 mm of clearance in the lintel area (at least 115 mm for doors with operators) and a 90 mm sideroom.

Hörmann sectional doors come with all the necessary fitting materials for this situation.



## Special anchor for frame side fixing

The sectional door frame can be fitted to the side wall of the garage with Hörmann's optional, universal anchors. Irregularities in the wall can be easily compensated, leaving the reveal intact.

**2** Fitting with up to 35 mm wall spacing

**3** Fitting with angled or irregular side wall



**4** Fitting with non-load bearing facades (facing brick or thermal insulation) with at least 90 and max. 125 mm sideroom





### Fascia panels for standard fitting behind the opening with small lintel space

For all door versions, our standard fascia panels always match the door surface finish and colour or style and can thus be visibly mounted in the opening.



### Double-skinned fascia panel for fitting in the opening with larger gap to the ceiling

A matching, double-skinned additional fascia panel covers the gap between the ceiling and fascia panel. It is available for all surface finishes and colours or designs. Glazings are also possible after technical inspection.

This panel can be optionally supplied as an aluminium frame.






### Flush-fitting fascia panels

For LPU 42 doors, a fascia panel is the most elegant solution for an invisible transition between the panel and door leaf. When the door is closed, the top door section is flush with the panel. It is available for all door styles with all surface finishes and colours or designs (panelled on request).

For further information, please see the fitting data or contact your Hörmann partner.

## MODERNISE AND IMPROVE

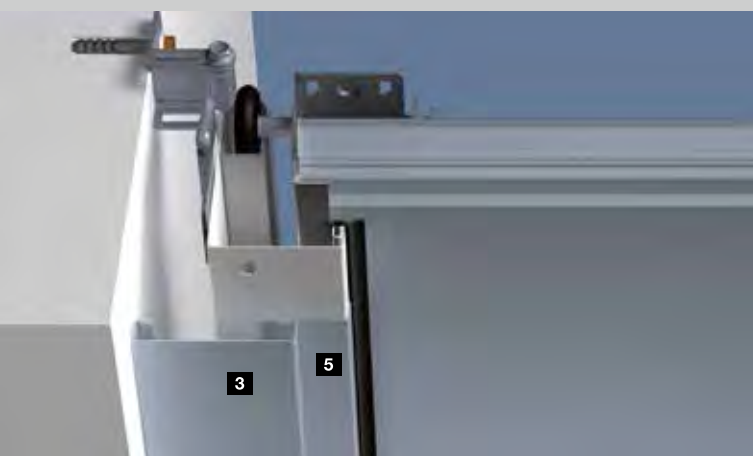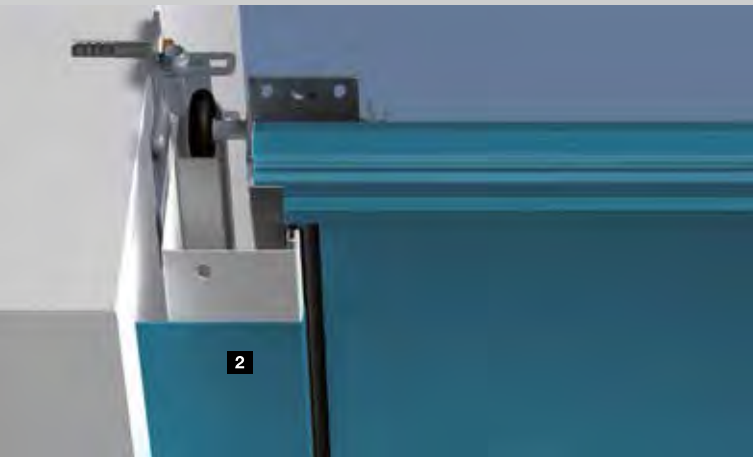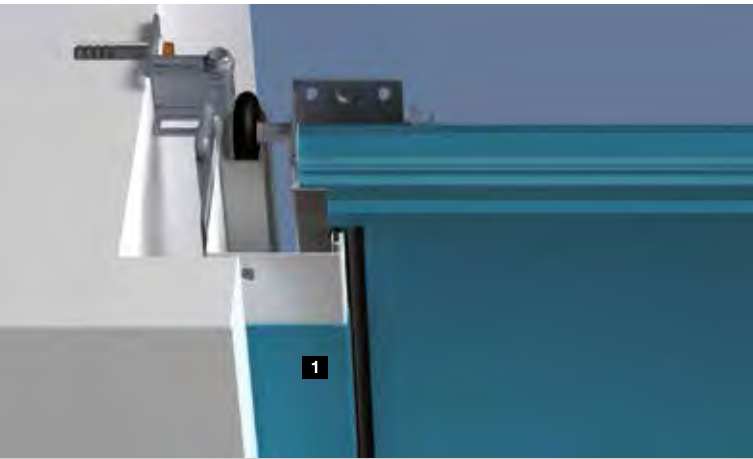

### Frame covering in the colour of the door

At Hörmann, side frames are delivered in Woodgrain white as standard. With a frame covering that matches the door sections' surface finish and colour or decor, you can also achieve a harmonious appearance for doors. For Micrograin doors, the frame covering comes with a smooth Silkgrain surface finish.

Two different widths make it possible to cover the side frame for different fitting situations.

**1** 55-mm-wide frame covering for fitting behind the opening, with little sideroom (< 90 mm)

**2** 90-mm-wide frame covering for fitting in the opening, flush with the wall

### Fascia frame set for lintel and side

A door in an inexpensive standard or modernisation size can be fitted in the opening. The remaining gap between the side wall and door frame (max. 35 mm) is covered using a fascia frame set **3**. This set comes with fascia panels in the surface finish and colour or design of the door sections, end caps and fixing materials. For Micrograin doors, the frame covering comes with a smooth Silkgrain surface finish.

The fascia panels **4** match the surface finish and colour of the door as standard. Additionally, the side frame is covered with a frame covering **5** in the surface finish and colour or decor of the door sections.



### Retrofit fascia set to properly cover damaged wall edges

Unattractive gaps in the lintel and opening areas can be covered easily with the optional retrofit fascia, doing away with the need for additional brick laying and plastering work. Additional brickwork and plastering work are no longer required.

The set with 3 fascia panels (each 3 metres long) is available in all surface finishes and colours or decors to match the door. Micrograin doors are supplied with retrofit fascias in a smooth Silkgrain version.



### Overall solution for sectional doors in concrete pre-fabricated garages

Broader fascia panels **1** for fitting in concrete pre-fabricated garages perfectly cover the lintel area of the opening.

The special door frame with pre-fitted anchors and frame fascias **2** is fitted to the side wall or on the conical sideroom. The wide frame fascia covers the existing gap between the frame and the opening.

This door version is available in the surface finishes Woodgrain and Silkgrain in all colours.



### Recess set

When removing an old up-and-over door and fitting a new LPU 42 sectional door, a time-consuming process is often necessary to remove the threshold rail or straighten the ground. With the recess set, these steps can be omitted as the sectional door is positioned in front of the threshold rail.

The set consists of a compensation profile **1** and special track applications. The frame must be shortened by 25 mm if the set is used. This can either be ordered in the desired dimensions or shortened on-site.

For further information, please see the fitting data or contact your Hörmann partner.

## GARAGE DOOR OPERATORS

## Reliable, Safe and Maintenance-Free

Hörmann garage door operators are perfectly matched to your Hörmann sectional door. The result: simple operation, maximum convenience and the greatest operational safety.

On encountering an unexpected obstruction, the automatic safety cut-out stops the door safely and reliably. Your door opens and closes quietly and smoothly with the soft start and soft stop. Our elegant hand transmitters allow you to open your gate from your car as easily as you would operate a TV. You can also operate your door using stationary control elements, such as a radio code switch or radio finger-scan.



Garage Door  
and Entrance Gate Operators  
High quality operators for Hörmann's sectional doors

More information can be found in the Garage Door and Entrance Gate Operators brochure.





# SupraMatic – the supra-fast operator with many additional functions

- As standard with 5-button hand transmitter HS 5 BS
- Inquiry of the door position
- Low power consumption
- Easy to program
- 2x 7-segment display
- Separately switchable LED lighting with energy efficiency class A++ ■ **NEW**
- Adjustable ventilation slot
- Automatic door locking
- Operator cover made of brushed aluminium



Standard hand transmitter  
HS 5 BS, textured surface  
black

| Garage door operators | SupraMatic E         | SupraMatic P                                 |
|-----------------------|----------------------|----------------------------------------------|
| Special feature       |                      | For timber doors and doors with wicket doors |
| Equipment             |                      | Photocell                                    |
| Cycles per day / hour | 25 / 10              | 50 / 10                                      |
| Pull and push force   | 650 N                | 750 N                                        |
| Peak force            | 800 N                | 1000 N                                       |
| Max. opening speed    | 22 cm/s              | 22 cm/s                                      |
| Max. door width       | 5500 mm              | 6000 mm                                      |
| Max. door surface     | 13.75 m <sup>2</sup> | 15 m <sup>2</sup>                            |

## ProMatic – the good-value starter model as an introduction to Hörmann's premium quality

- As standard with 4-button hand transmitter HSE 4 BS
- Adjustable ventilation slot
- Automatic door locking
- LED lighting with energy efficiency class A++ ■ **NEW**

## ProMatic Akku for garages without a power connection

- Standard hand transmitter and functions as with the ProMatic
- Optional solar module to recharge the battery



Standard hand transmitter HSE 4 BS, textured surface black with plastic caps



ProMatic Akku with solar module

| Garage door operators | ProMatic**           | ProMatic Akku**                      |
|-----------------------|----------------------|--------------------------------------|
| Special feature       |                      | For garages without power connection |
| Cycles per day / hour | 12 / 5               | 5 / 2                                |
| Pull and push force   | 600 N                | 350 N                                |
| Peak force            | 750 N                | 400 N                                |
| Max. opening speed    | 14 cm/s              | 13 cm/s                              |
| Max. door width       | 5000 mm              | 3000 mm                              |
| Max. door surface     | 11.25 m <sup>2</sup> | 8 m <sup>2</sup>                     |

\* The complete warranty conditions can be found at: [www.hoermann.com](http://www.hoermann.com)

\*\* Not for LPU 67 Thermo

## MOBILE ACCESSORIES

**Hand transmitter****HS 5 BS**

4 button functions plus query button

**1** high-gloss surface black or white

**2** textured surface black

**Hand transmitter****HS 4 BS**

4 button functions

**3** textured surface black

**Hand transmitter****HS 1 BS**

1 button function

**4** textured surface black

**Hand transmitter****HSE 1 BS**

1 button function, incl. eyelet for key ring

**5** textured surface black

**Hand transmitter****HSE 4 BS**

4 key functions, including eyelet for key ring

**6** textured surface black with chrome or plastic caps

**Hand transmitter****HSE 2 BS**

2 button functions, including eyelet for key ring

**7** high-gloss surface black or white

**8** high-gloss surface green, purple, yellow, red, orange

**9** decors in silver, carbon, dark rootwood

(Shown from left to right)





**10 Hand transmitter  
HSD 2-A BS**

Aluminium look, 2 button functions, can also be used as a key ring


**11 Hand transmitter  
HSD 2-C BS**

High-gloss chrome, 2 button functions, can also be used as a key ring



**12 Hand transmitter  
HSP 4 BS**

4 button functions, with button lock-out, including key ring



**13 Hand transmitter  
HSZ 1 BS**

1 button function, for insertion in vehicle cigarette lighter

**14 Hand transmitter  
HSZ 2 BS**

2 button functions, for insertion in vehicle cigarette lighter



## Hand transmitter

Hörmann offers numerous beautifully shaped models that can be assigned up to 5 functions. All control elements use our innovative BiSecur radio technology.



## HSZ hand transmitter

The alternative to homelink systems: integrated in an inconspicuous spot in your car. Inserted in the vehicle's cigarette lighter, the HSZ hand transmitter is easily accessible and convenient to operate.

## STATIONARY ACCESSORIES

**Radio code switch  
FCT 3 BS**

For 3 functions, with  
illuminated buttons

**Radio internal push button  
FIT 2-1 BS**

■ **NEW from autumn 2017**  
For 2 functions, connection  
option for maximum 2 control  
elements via cable e.g. key  
switches

**Radio code switch  
FCT 10 BS**

For 10 functions, with  
illuminated buttons and  
protective cover

**Radio internal push button  
FIT 1 BS**

1 button function with large  
button for simple operation

**Radio internal push button  
FIT 4 BS**

4 button functions

**Radio finger-scan  
FFL 12 BS**

For 2 functions and up to  
12 fingerprints

**Radio internal push button  
FIT 5 BS**

4 button functions plus query  
button

**Recessed radio transmitter**

For recessed buttons with up  
to two functions, central  
installation in the house  
within sight of the garage  
door

**HSU 2 BS:** for switch boxes  
with 55 mm Ø with  
connection to the house  
mains supply

**FUS 2 BS:** for switch boxes  
with 55 mm Ø including 1.5 V  
battery

**Radio receiver electric socket  
FES 1 BS**

For switching lights and other  
devices on and off up to  
2500 watt

**FES 1-1 BS**

For controlling (impulse)  
operators of other makes and  
switching lights and other  
devices on and off, up to 2500  
watt

**Key switch ■ NEW****1 STUP 50****2 STAP 50**

In a recessed version and surface-mounted version, including 3 keys

**Internal push button****IT 1b-1 ■ NEW from autumn 2017**

Large, illuminated button for convenient opening of the door

**Transponder key switch****TTR 1000-1 ■ NEW**

For 1 function, for 1000 teachable keys, 1 keys in scope of delivery (more on request)

**Internal push button****IT 3b-1 ■ NEW from autumn 2017**

Large button with illuminated ring for opening of the door, buttons for the operator light and to switch off the radio control (only for SupraMatic)

**Code switch CTP 3-1 ■ NEW**

For 3 functions, with illuminated lettering and touch-sensitive black touch surface

**Photocell EL 101**

One-way photocell system, immediately stops the door when the light beam is interrupted

**Code switch****CTR 1b-1 / 3b-1 ■ NEW**


For 1 or 3 functions

**Code switch CTV 3-1 ■ NEW**

For 3 functions, particularly robust with metal keypad

**Emergency battery HNA for garage door operators**

Emergency power supply to bypass power failures up to 18 hours and max. 5 door cycles, recharges during normal operation, for all current Hörmann garage door operators

**LED light strip**

Neutral white light, variable plug-in system, can be fitted to lintel or bottom edge of door leaf, LED spacing: 125 mm, energy efficiency class A

## ACCESSORIES

## Optimum ventilation of the garage can effectively prevent mould

It is very important to ventilate the garage regularly; especially if insulated garage doors are fitted in poorly insulated garages. Ventilation is achieved by folding down the top section (optional equipment) top prevent dirt, leaves or small animals from entering the garage. An additional climate sensor, which automatically regulates ventilation, is recommended for energy-efficient ventilation.





1

### 1 Ventilation slot on the topmost section

- Ventilation slot through optional folding roller bracket on the top section
- Bottom door section remains sealed on the ground, thus offering protection against small animals or leaves
- Can be operated at the push of a button via the “2nd opening height” function
- Optionally available for all sectional garage doors LPU 42 with operator
- All sectional garage doors LPU 42 (track applications N, L, Z) can be retrofitted with operator SupraMatic\* or ProMatic\*\*

### 2 Inside climate sensor HKSI for automatic garage ventilation ■ NEW from autumn 2017

- For monitoring humidity in the garage
- For automatic ventilation of the garage using the “2nd opening height” function
- If humidity is too high the door automatically opens
- When humidity is adjusted the door closes again automatically
- Adjustable temperature range in which the door does not open (e.g. if there is a risk of frost in the garage)
- Adjustable operating hours (e.g. overnight shut-off)
- Adjustable opening hours (e.g. max. 2 hours per ventilation)
- Possible upgrade with exterior sensor HKSA 3: measures the humidity outside and prevents the door from opening in case of high humidity levels
- Possible upgrade with an on-site fan for fast and effective ventilation
- For operator SupraMatic (from Index C) and operator WA 300 S4 (from Index D)



2



3

\* From year of manufacture 2012, up to door widths of 3000 mm

# Operating comfort with the highest security



Safety while operating the garage door is top priority for Hörmann. And Hörmann sets the standards for this with its innovative solutions. This has been proven time and time again through numerous Hörmann patents. Hörmann sectional doors are tested and certified in accordance with the high safety requirements of European standard 13241-1, not only on their own but also in combination with operators. It would be hard to find a safer sectional door. And this provides you and your family with safety during daily use.

It pays to compare!





1

Hörmann patent

### 1 Tension spring assembly with spring-in-spring system

Double tension springs and double cabling on each side safeguard the door leaf against crashing to the floor. Thanks to the patented spring-in-spring system, broken springs are prevented from flying out and causing injuries. Sectional doors up to 3000 mm wide and 2625 mm high include the proven tension spring technology as standard.



2

Hörmann patent

### 2 Torsion spring assembly with integrated spring safety device

Torsion springs on both sides feature a patented spring safety device. In the event of a spring breaking, they arrest the door immediately, thereby preventing the door leaf from crashing to the floor. Larger sectional doors and doors with integral wicket door or garage doors with solid timber panels feature torsion spring technology.



3

Hörmann patent

### 3 Secure guidance of the door in safety tracks

Patented, adjustable track rollers, sturdy roller holders and safety tracks ensure that there is no danger of the door "derailing". The door sections are safely parked under the ceiling.



4

### 4 Finger trap protection on the inside, outside and on the hinges

The unique form of the door sections eliminates trap points, both between the sections and on the hinges. Both between the sections and on the hinges.



5

### 5 Trap guard on the side frame

With Hörmann, the frames are completely closed from top to bottom. There are no gaps between the door leaf and frame in which fingers could get trapped!

# The premium and energy-saving door

LPU 67 Thermo is the best choice for you, if your garage is directly attached to the house or if you use the room as a workshop or hobby room. Thanks to excellent thermal insulation and the harmonious inside view in the premium version, it meets all the needs of a multi-purpose room you can feel comfortable in.


**Standard version**

Galvanized fittings, frame, tracks and connection rails

**Premium version**

Fittings, frames, tracks and connection rails in Grey white RAL 9002 (matching the inside of sections) as well as tandem track rollers for very quiet and gentle door travel

\* Galvanized spring assembly incl. holder, spring safety device, cable drum, operator boom

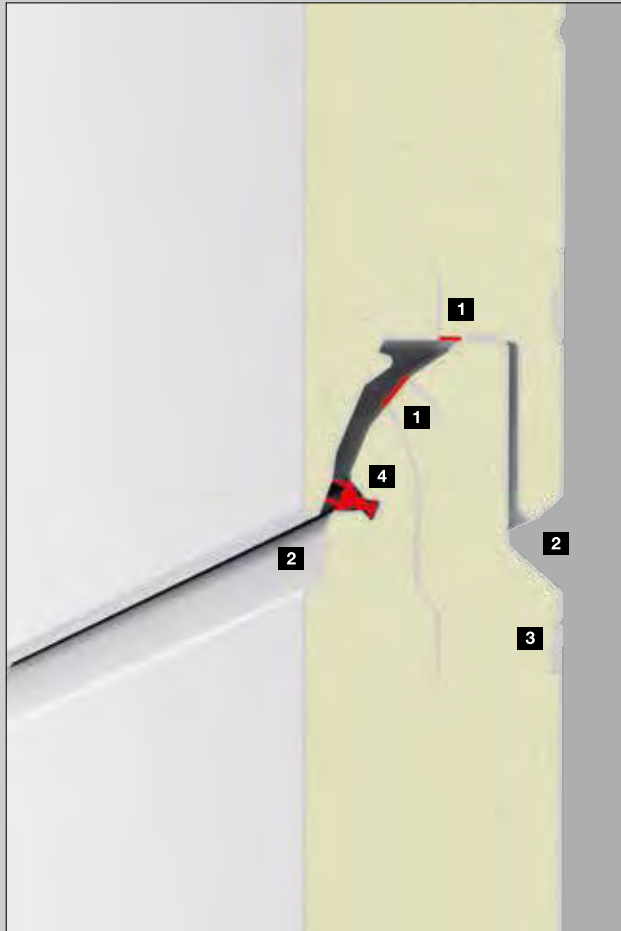

#### Standard version with excellent thermal insulation

- U-value of sections:  $0.33 \text{ W}/(\text{m}^2 \cdot \text{K})$
- U-value of door\*:  $1.0 \text{ W}/(\text{m}^2 \cdot \text{K})$
- Up to 30 % better thermal insulation compared to a sectional garage door LPU 42

- 1 67-mm-thick sections with thermal break
- 2 Finger trap protection outside and inside
- 3 Triple sheet steel reinforcement in screw fixing area
- 4 Double lip seal in the section transitions
- 5 Double bottom seal

#### Further equipment options:

- All glazing types available for depth 42 mm
- Aluminium glazing frame with thermal break
- All glazings with triple panes
- Optional ThermoFrame for up to 10 % better thermal insulation (U-value of the door\*:  $0.9 \text{ W}/(\text{m}^2 \cdot \text{K})$ ), for further information, see pages 78 – 79.

#### Energy modernisation of existing doors

If you would like improved thermal insulation for your fitted LPU 42 door (from BR 40), the 42-mm-thick sections can be retrofitted (replaced) with 67-mm-thick sections with thermal break. The frame does not need to be replaced.

\* Door size  $5000 \times 2125 \text{ mm}$



## SPU F42 PLUS TECHNOLOGY

# For door openings up to 7000 mm wide and special fitting situations

The industrial sectional door SPU F42 Plus is the ideal solution for especially wide garages and for fitting situations where an operator cannot be fitted above the door. It is available for S-, M- and L-ribbed door styles with all surface finishes, decors and colours. For specific fitting dimensions, please see the technical manual for industrial sectional doors.





### 1 Operator SupraMatic HT

For garage doors over 6000 mm wide, the SupraMatic HT operator is the first choice. The rail-guided operator features the same equipment\* and functions as the SupraMatic E, such as soft start and soft stop, adjustable ventilation slot and automatic door locking.




### 2 Shaft operator WA 300 S4


If it is not possible to install the operator in the garage in the centre with a guide rail, we recommend the shaft operator WA 300 S4 for side fitting. This operator does not require additional headroom. Additionally, it features standard power limit, soft start and soft stop, very high security and quiet door travel.

### 3 4 Track variants for special fitting situations

The industrial sectional door SPU F42 Plus offers a variety of track variants for special fitting situations, e. g. a track application with inclination that you can use to guide your garage sectional door at an incline along the pitched roof of your garage.

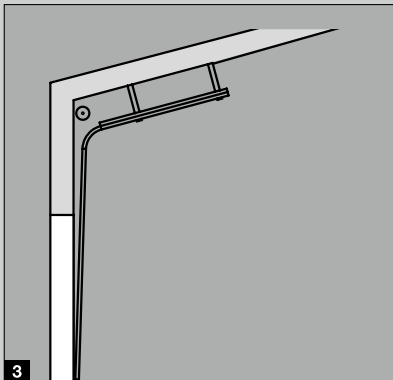

Track application HD with inclination

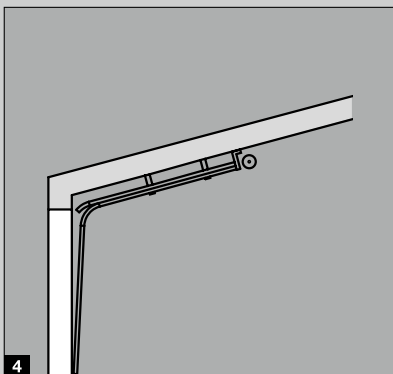

Track application LD with inclination

\* Without operator light



Additional information can be found in the Industrial Sectional Doors brochure

## PERFORMANCE CHARACTERISTICS

# Outstanding performance characteristics




A well-insulated garage door is always recommended when the garage and the home are directly connected. The ThermoFrame frame connection further improves the already high insulation values of the double-skinned Hörmann sectional garage doors.

This reduces your energy costs.



## Improved thermal insulation with ThermoFrame



The plastic profile that can be simply fitted together with the door frame, creates a thermal break between the frame and the brickwork, improving the thermal insulation by up to 15%\*. In addition, extra lip seals on both sides and in the upper section of the door provide better sealing while lowering the loss of heating energy from the garage interior. The ThermoFrame frame connection is optionally available for all Hörmann sectional garage doors.

\* For a double-skinned sectional garage door LPU 42 size 5000 × 2125 mm

## Thermal insulation

The thick insulated sandwich sections insulate just as well as a brick wall. This means that your garage is not wasting any energy and is saving you real money.



## Acoustic insulation

The excellent acoustic insulation for the LPU sections reduces road traffic noise (approx. 80 dB(A)) to room volume level (approx. 55 dB(A)). So you can do what you want in your garage, whether you want to work in peace or throw a party.



## Wind load

The LPU door sections are extremely sturdy so that your door can even withstand wind forces of up to 120 km/h, equivalent to hurricane force, without a problem. This means optimum protection for your garage and everything in it.



## Sealing

Your garage is also well protected from heavy rain. Due to the all-around seals between the door leaf and frame as well as the seals between the sections, virtually no rain can penetrate a closed door.



## Performance characteristics according to European standard 13241-1

| Door type                 | Thermal insulation             | Acoustic insulation | Wind load <sup>5)</sup> | Sealing               |                       |
|---------------------------|--------------------------------|---------------------|-------------------------|-----------------------|-----------------------|
|                           |                                |                     |                         | Air                   | Water                 |
| <b>LPU 67 Thermo</b>      |                                |                     |                         |                       |                       |
| Section                   | U = 0.33 W/(m <sup>2</sup> ·K) | R = approx. 25 dB   | Class 3                 | Class 3 <sup>4)</sup> | Class 3 <sup>3)</sup> |
| Door leaf                 | U = 0.49 W/(m <sup>2</sup> ·K) |                     |                         |                       |                       |
| Fitted door <sup>1)</sup> | U = 1.0 W/(m <sup>2</sup> ·K)  |                     |                         |                       |                       |
| <b>LPU 42</b>             |                                |                     |                         |                       |                       |
| Section                   | U = 0.5 W/(m <sup>2</sup> ·K)  | R = approx. 25 dB   | Class 3                 | Class 3 <sup>4)</sup> | Class 3 <sup>3)</sup> |
| Door leaf                 | U = 0.9 W/(m <sup>2</sup> ·K)  |                     |                         |                       |                       |
| Fitted door <sup>1)</sup> | U = 1.4 W/(m <sup>2</sup> ·K)  |                     |                         |                       |                       |
| <b>LTE 42</b>             |                                |                     |                         |                       |                       |
| Door leaf                 | U = 6.0 W/(m <sup>2</sup> ·K)  | R = approx. 20 dB   | Class 2                 | Class 0 <sup>2)</sup> | Class 0 <sup>2)</sup> |
| Fitted door <sup>1)</sup> | U = 6.5 W/(m <sup>2</sup> ·K)  |                     |                         |                       |                       |
| <b>LTH</b>                |                                |                     |                         |                       |                       |
| Door leaf                 | U = 2.5 W/(m <sup>2</sup> ·K)  |                     | Class 3                 | Class 0 <sup>2)</sup> | Class 0 <sup>2)</sup> |
| Fitted door <sup>1)</sup> | U = 3.0 W/(m <sup>2</sup> ·K)  |                     |                         |                       |                       |

<sup>1)</sup> The U-values apply to fitted doors without glazing in the size: 5000 × 2125 mm

<sup>2)</sup> Doors with ventilation slots, on request classes 2-3

<sup>3)</sup> Up to 70 Pa water pressure

<sup>4)</sup> Valid for panelled and L-ribbed (LPU 42 doors S, M, D or T-ribbed: class 2)

<sup>5)</sup> Higher wind load classes on request

## DIMENSIONS AND FITTING DATA

Door types LPU 67 Thermo, LPU 42, LTE 42

| Size range <sup>1)</sup> |      |                                 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------------------------|------|---------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Door height grid (RM)    | 3000 |                                 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|                          | 2875 |                                 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|                          | 2750 |                                 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|                          | 2625 |                                 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|                          | 2500 |                                 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|                          | 2375 |                                 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|                          | 2250 |                                 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|                          | 2125 |                                 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|                          | 2080 |                                 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|                          | 2000 |                                 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 1875                     |      |                                 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|                          |      | 2250                            | 2375 | 2500 | 2625 | 2750 | 3000 | 3250 | 3500 | 3750 | 4000 | 4250 | 4500 | 4750 | 5000 | 5250 | 5500 | 6000 |
|                          |      | Door width grid (LZ)            |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|                          |      | 2430                            | 2555 | 2680 | 2805 | 2930 | 3180 | 3430 | 3680 | 3930 | 4180 | 4430 | 4680 | 4930 | 5180 | 5430 | 5680 | 6180 |
|                          |      | Interior garage dimension (GIM) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |

● = Available standard sizes depending on the door type and door style

<sup>1)</sup> LPU 67 Thermo is only available in special sizes up to 5000 mm door width, SPU F42 Plus up to door sizes 7000 x 5000 mm

<sup>2)</sup> Not available for panel styles with DecoGrain surface finishes and solid timber doors

| Modernisation sizes <sup>2)</sup> |      |      |      |      |
|-----------------------------------|------|------|------|------|
| Door height grid (RM)             |      |      |      |      |
|                                   |      |      |      |      |
|                                   |      |      |      |      |
|                                   |      |      |      |      |
|                                   |      |      |      |      |
|                                   |      |      |      |      |
|                                   |      |      |      |      |
|                                   | 2205 |      | ●    | ●    |
|                                   | 2080 | ●    | ●    | ●    |
|                                   | 1955 | ●    | ●    | ●    |
|                                   | 2190 | 2315 | 2440 | 2940 |
|                                   | LZ   |      |      |      |
|                                   | 2370 | 2495 | 2620 | 3120 |
|                                   | GIM  |      |      |      |

| Size range for track applications |      |      |                     |      |                     |      |         |  |
|-----------------------------------|------|------|---------------------|------|---------------------|------|---------|--|
| Track application Z               |      |      | Track application N |      | Track application L |      |         |  |
| Min. DE *                         |      |      | LDH **              |      | Min. DE *           |      | LDH *** |  |
| With operator                     |      |      |                     |      |                     |      |         |  |
| Door height grid (RM)             | 3000 |      |                     | 3210 | 3000                | 3115 | 2970    |  |
|                                   | 2875 |      |                     | 3085 | 2875                | 2990 | 2845    |  |
|                                   | 2750 |      |                     | 2960 | 2750                | 2865 | 2720    |  |
|                                   | 2625 | 2740 | 2595                | 2835 | 2625                | 2740 | 2595    |  |
|                                   | 2500 | 2615 | 2470                | 2710 | 2500                | 2615 | 2470    |  |
|                                   | 2375 | 2490 | 2345                | 2585 | 2375                | 2490 | 2345    |  |
|                                   | 2250 | 2365 | 2220                | 2460 | 2250                | 2365 | 2220    |  |
|                                   | 2125 | 2240 | 2095                | 2335 | 2125                | 2240 | 2095    |  |
|                                   | 2000 | 2115 | 1970                | 2210 | 2000                | 2115 | 1970    |  |
|                                   | 1875 | 1990 | 1845                | 2085 | 1875                | 1990 | 1845    |  |
| With manual operation             |      |      |                     |      |                     |      |         |  |
| Door height grid (RM)             | 3000 |      |                     | 3210 | 2950                | 3100 | 2900    |  |
|                                   | 2875 |      |                     | 3085 | 2825                | 2975 | 2775    |  |
|                                   | 2750 |      |                     | 2960 | 2700                | 2850 | 2650    |  |
|                                   | 2625 | 2725 | 2545                | 2835 | 2575                | 2725 | 2525    |  |
|                                   | 2500 | 2600 | 2420                | 2710 | 2450                | 2600 | 2400    |  |
|                                   | 2375 | 2475 | 2295                | 2585 | 2325                | 2475 | 2275    |  |
|                                   | 2250 | 2350 | 2170                | 2460 | 2200                | 2350 | 2150    |  |
|                                   | 2125 | 2225 | 2045                | 2335 | 2075                | 2225 | 2025    |  |
|                                   | 2000 | 2100 | 1920                | 2210 | 1950                | 2100 | 1900    |  |
|                                   | 1875 | 1975 | 1795                | 2085 | 1825                | 1975 | 1775    |  |

\* With ThermoFrame and operator: see fitting data


\*\* LPU 67 Thermo: LDH-25 mm

\*\*\* LPU 42: LZ > 3010 mm = LDH - 50 mm LPU 67 Thermo: LZ < 3000 mm = LDH - 25 mm, LZ > 3010 mm = LDH - 75 mm


| Modernisation sizes   |      |                     |      |
|-----------------------|------|---------------------|------|
|                       |      | Track application Z |      |
|                       |      | Min. DE **          | LDH  |
| With operator         |      |                     |      |
| Door height grid (RM) |      |                     |      |
|                       |      |                     |      |
|                       |      |                     |      |
|                       |      |                     |      |
|                       |      |                     |      |
|                       |      |                     |      |
|                       |      |                     |      |
|                       | 2205 | 2320                | 2175 |
|                       | 2080 | 2195                | 2050 |
|                       | 1955 | 2070                | 1925 |
| With manual operation |      |                     |      |
| Door height grid (RM) |      |                     |      |
|                       |      |                     |      |
|                       |      |                     |      |
|                       |      |                     |      |
|                       |      |                     |      |
|                       |      |                     |      |
|                       |      |                     |      |
|                       | 2205 | 2305                | 2125 |
|                       | 2080 | 2180                | 2000 |
|                       | 1955 | 2055                | 1875 |

Dimensions in mm


## Track applications




Track application Z




Track application BZ




Track application N




Track application BL




Track application L



Track application SN



Track application H



Track application SL

## Explanations

If you are interested in this track version for high-lift doors, contact your Hörmann specialist dealer.

|     |                                                                                                               |
|-----|---------------------------------------------------------------------------------------------------------------|
| LZ  | Clear frame dimensions                                                                                        |
| RM  | Grid height                                                                                                   |
| DE  | Ceiling height                                                                                                |
|     | <b>Note:</b> The operator should be fitted 40 mm higher for dark coloured doors which are exposed to the sun. |
| LDH | Clear passage height                                                                                          |
| GIM | Inside garage dimension                                                                                       |
| ET  | Distance back                                                                                                 |

### Track applications

#### Track application Z (not for LTH 42)

Tension spring track application with tension spring assembly

Max. width 3000 mm

Max. height 2625 mm / 2500 mm (LPU 67 Thermo)

#### Track application N

Normal track application with torsion spring assembly

Max. width 6000 mm

Max. height 3000 mm

#### Track application L

Low-headroom tracks with torsion spring assembly

Max. width 6000 mm

Max. height 3000 mm

#### Track application H (not for LPU 67 Thermo)

High-lift track application with torsion spring assembly

Max. width 5500 mm

Max. height 3000 mm

#### Track application BZ (not for LPU 67 Thermo)

Tension spring track application with tension spring assembly and flush-fitting panels

Max. width 3000 mm

Max. height 3189 mm

#### Track application BL (not for LPU 67 Thermo)

Low-headroom tracks with torsion spring assembly and flush-fitting panels

Max. width 4000 mm

Max. height 3520 mm

#### Track application SN (only LPU 42)

Normal track application with torsion spring assembly with chamfered bottom section (max. 300 mm height difference)

Max. width 4500 mm

Max. height 3000 mm

#### Track application SL (only LPU 42)

Normal track application with torsion spring assembly and high-lift track application with chamfered bottom section (max. 300 mm height difference)


Max. width 4500 mm

Max. height 3000 mm

For further information, please see the fitting data or contact your Hörmann partner.

## DIMENSIONS AND FITTING DATA FOR LPU 67 THERMO, LPU 42, LTE 42

## Horizontal view

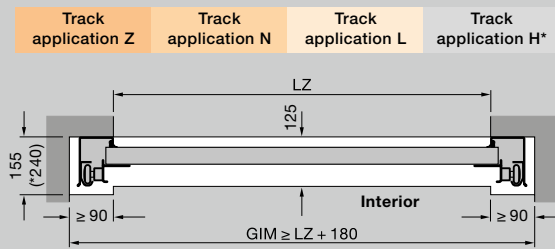





## Fitting with track applications Z, N, L

| Overall length operators (W) | Track application Z | Track application N | Track application L |
|------------------------------|---------------------|---------------------|---------------------|
| Doors with operator          |                     |                     |                     |
| 2125 (K)                     | 3200                | 3200*               | 3200                |
| 2250 (K)                     |                     | 3200**              |                     |
| 2375 (M)                     | 3450                | 3450*               | 3450                |
| 2500 (M)                     |                     | 3450**              |                     |
| 2625 (L)                     | 4125                |                     |                     |
| 3000 (L)                     |                     | 4125                | 4125                |

\* LPU 67 Thermo

\*\* LPU 42, LTE 42

## Vertical views

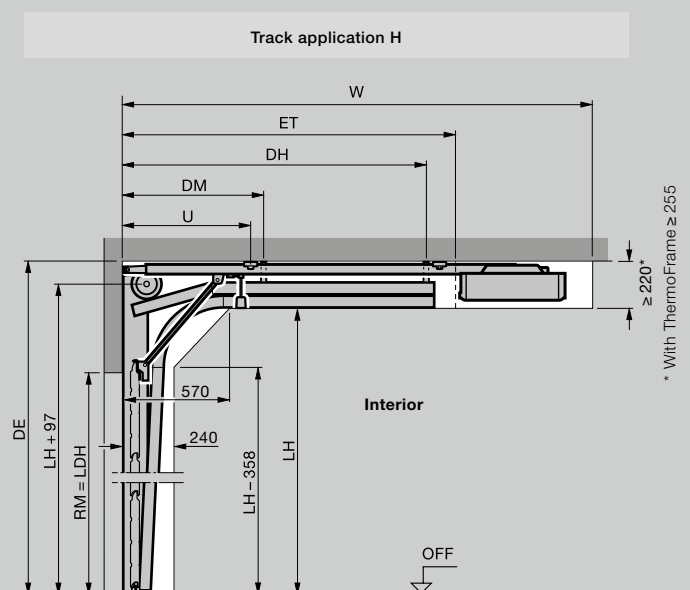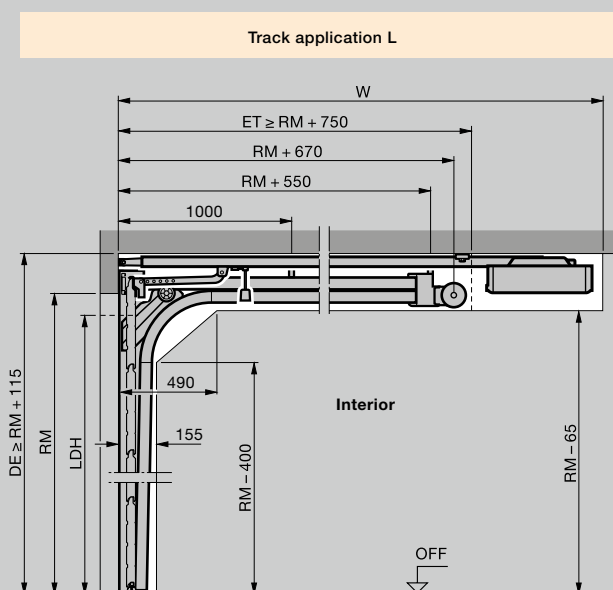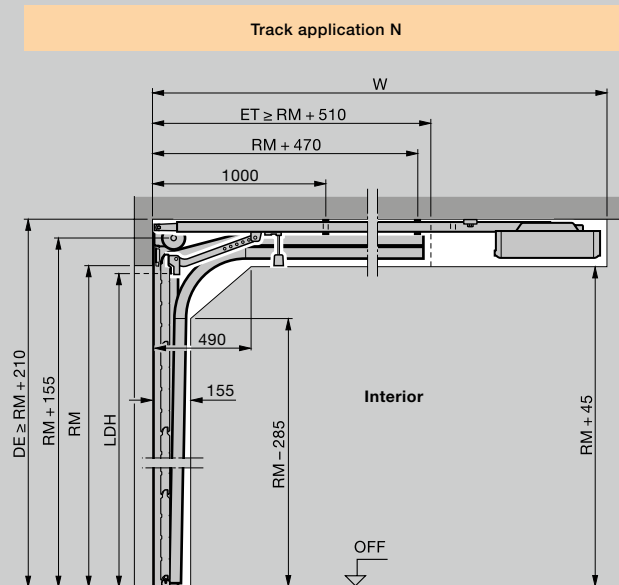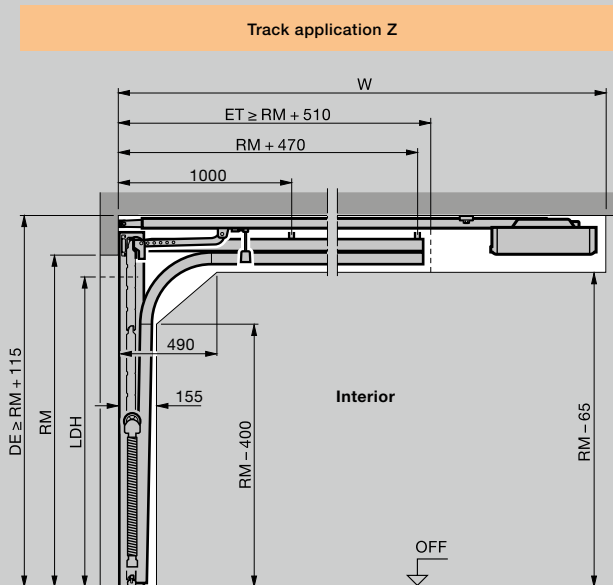


## Fitting with flush-fitting panel


| Overall length operators (W) |          | Track application BZ | Track application BL |
|------------------------------|----------|----------------------|----------------------|
| Doors with operator          |          |                      |                      |
| Max. door height             | 2125 (K) | 3272                 | 3272                 |
|                              | 2375 (M) | 3522                 | 3522                 |
|                              | 2625 (L) | 4197                 |                      |
|                              | 3000 (L) |                      | 4197                 |

## Vertical views

| Track application BZ | Track application BL | Without lintel |
|----------------------|----------------------|----------------|
|----------------------|----------------------|----------------|

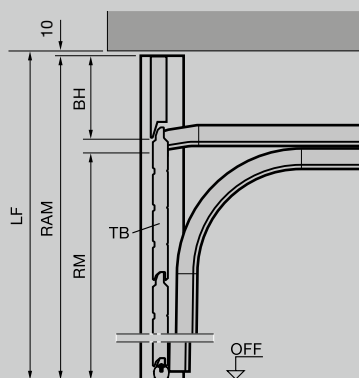

| Track application BZ | Track application BL | With lintel |
|----------------------|----------------------|-------------|
|----------------------|----------------------|-------------|

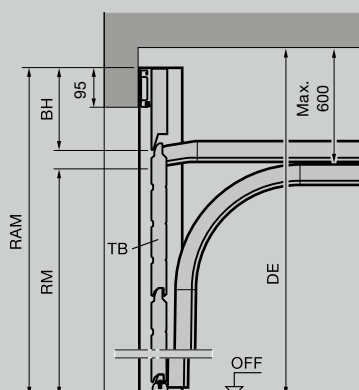

Dimensions in mm

## Explanations

### Drive booms

|   |             |
|---|-------------|
| K | Short boom  |
| M | Medium boom |
| L | Long boom   |

### Track applications

|    |                                                            |
|----|------------------------------------------------------------|
| Z  | Tension spring track application                           |
| N  | Normal track application                                   |
| L  | Low headroom track application                             |
| H  | High-lift track application                                |
| BZ | Tension spring track application with flush-fitting panels |
| BL | Low-lintel track application with flush-fitting panels     |

### Ordering sizes

|     |                                                                                                               |
|-----|---------------------------------------------------------------------------------------------------------------|
| LZ  | Clear frame dimensions                                                                                        |
| RM  | Grid height                                                                                                   |
| RAM | Overall frame dimension (of flush-fitting panels)                                                             |
|     | Min. = RM + 190 mm                                                                                            |
|     | Max. = RM + door section height                                                                               |
| W   | Overall length with operator                                                                                  |
| LF  | Structural opening                                                                                            |
| DE  | Ceiling height                                                                                                |
|     | <b>Note:</b> The operator should be fitted 40 mm higher for dark coloured doors which are exposed to the sun. |
| LDH | Clear passage height                                                                                          |
|     | See table on page 80                                                                                          |
| GIM | Inside garage dimension                                                                                       |
| ET  | Distance back                                                                                                 |
| TB  | Door leaf                                                                                                     |
| BH  | Panel height                                                                                                  |
| LH  | Track height                                                                                                  |
| DM  | Ceiling suspension, centre                                                                                    |
| DH  | Ceiling suspension, back                                                                                      |
| OFF | Finished floor level                                                                                          |

### Note

Before fitting a sectional door, the structural openings must be finished and the floors be laid and level. The clearance required for fitting the door must be free of supply lines, heater fans, etc.

For further information, please see the fitting data or contact your Hörmann partner.

## SIZES AND FITTING DATA FOR LPU 42 DOORS WITH WICKET DOORS

## Wicket doors with ribbing

| Size range            |      |                      |      |      |      |      |      |      |      |
|-----------------------|------|----------------------|------|------|------|------|------|------|------|
| Door height grid (RM) | 3000 |                      |      |      |      |      |      |      |      |
|                       | 2875 | ○                    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                       | 2750 |                      |      |      |      |      |      |      |      |
|                       | 2625 | ○                    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                       | 2500 |                      |      |      |      |      |      |      |      |
|                       | 2375 |                      |      |      |      |      |      |      |      |
|                       | 2250 |                      |      |      |      |      |      |      |      |
|                       | 2205 |                      |      |      |      |      |      |      |      |
|                       | 2125 |                      |      |      |      |      |      |      |      |
|                       | 2080 |                      |      |      |      |      |      |      |      |
|                       | 2000 |                      |      |      |      |      |      |      |      |
|                       | 1955 |                      |      |      |      |      |      |      |      |
|                       | 1875 |                      |      |      |      |      |      |      |      |
|                       |      | 2250                 | 2375 | 2500 | 2750 | 3000 | 3250 | 3500 | 3750 |
|                       |      | Door width grid (LZ) |      |      |      |      |      |      |      |
|                       |      |                      |      |      |      |      |      |      | 4000 |

## Wicket doors with ribbing

| Clear passage height |              | Lever height<br>from FFL |
|----------------------|--------------|--------------------------|
| Without glazing      | With glazing |                          |
| 1955                 | 1955         | 831                      |
| 1871                 | 1871         | 799                      |
| 2155                 | 2155         | 906                      |
| 2055                 | 2055         | 868                      |
| 1955                 | 1955         | 831                      |
| 1855                 | 1855         | 793                      |
| 2123                 | 2203         | 924                      |
| 2075                 | 2155         | 906                      |
| 1999                 | 2079         | 877                      |
| 1955                 | 2035         | 861                      |
| 1875                 | 1955         | 831                      |
| 1827                 | 1907         | 813                      |
| 1747                 | 1827         | 782                      |

## Doors with wicket doors with panels

| Size range            |      |                      |      |      |      |      |      |      |      |
|-----------------------|------|----------------------|------|------|------|------|------|------|------|
| Door height grid (RM) | 3000 |                      |      |      |      |      |      |      |      |
|                       | 2875 | □                    | □    | □    | □    | □    | □    | □    | □    |
|                       | 2750 | □                    | □    | □    | □    | □    | □    | □    | □    |
|                       | 2625 | □                    | □    | □    | □    | □    | □    | □    | □    |
|                       | 2500 |                      |      |      |      |      |      |      |      |
|                       | 2375 |                      |      |      |      |      |      |      |      |
|                       | 2250 |                      |      |      |      |      |      |      |      |
|                       | 2205 | □                    | □    | □    | □    | □    | □    | □    | □    |
|                       | 2125 |                      |      |      |      |      |      |      |      |
|                       | 2080 | □                    | □    | □    | □    | □    | □    | □    | □    |
|                       | 2000 |                      |      |      |      |      |      |      |      |
|                       | 1955 | □                    | □    | □    | □    | □    | □    | □    | □    |
|                       |      | 2250                 | 2500 | 2750 | 3000 | 3250 | 3500 | 3750 | 4000 |
|                       |      | Door width grid (LZ) |      |      |      |      |      |      |      |


## Wicket doors with panels

| Clear passage height | Lever height<br>from FFL |
|----------------------|--------------------------|
| 1955                 | 831                      |
| 1871                 | 799                      |
| 2155                 | 906                      |
| 2055                 | 868                      |
| 1955                 | 831                      |
| 1855                 | 793                      |
| 2203                 | 924                      |
| 2155                 | 906                      |
| 2079                 | 877                      |
| 2035                 | 861                      |
| 1955                 | 831                      |
| 1907                 | 813                      |

## Horizontal view


Track application N

Track application L

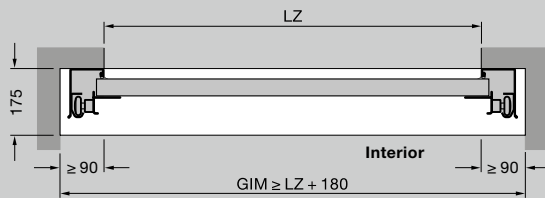


## Vertical views

Track application N

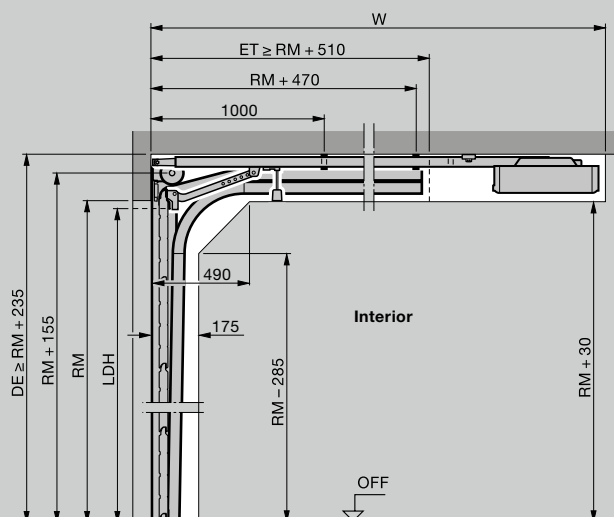

Track application L

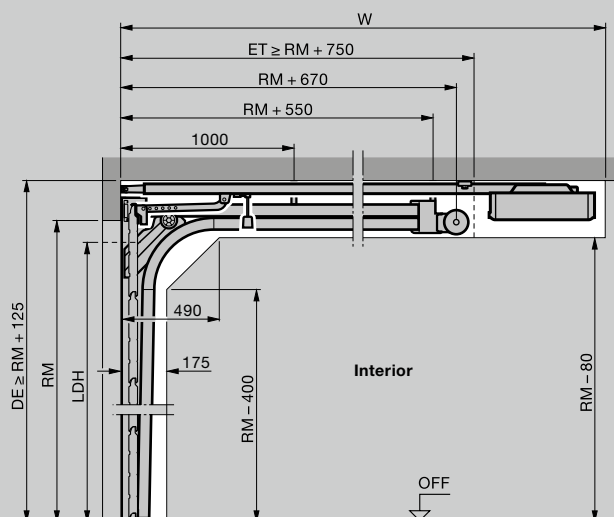

Dimensions in mm

## Explanations

## Track applications

- N Normal track application  
L Low headroom track application

## Ordering sizes

- LDB Clear passage width  
LDH Clear passage height  
LZ Clear frame dimensions  
RM Grid height  
W Overall length with operator

DE Ceiling height

## Track application N:

- Manual operation ≥ RM + 220 mm  
With operator ≥ RM + 235 mm  
With operator and ThermoFrame ≥ RM + 255 mm

## Track application L:

- Manual operation ≥ RM + 125 mm  
With operator ≥ RM + 125 mm  
With operator and ThermoFrame ≥ RM + 145 mm

## Track application N:

- Manual operation = RM - 160 mm  
With operator = RM - 100 mm

## Track application L:

- Manual operation = RM - 160 mm  
With operator = RM - 160 mm

GIM Inside garage dimension

ET Distance back

OFF Finished floor level

## Fitting with ThermoFrame

Fitting with ThermoFrame

LDB = LZ - 12 mm

Fitting with ThermoFrame and frame covering


LDB = LZ - 15 mm

## Note


The opening height must not be less than the ordering size of the garage door (RM), otherwise the wicket door will not open.

## SIZES AND FITTING DATA FOR SIDE DOORS


## Horizontal views

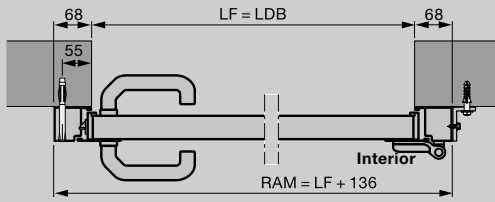


Side door with aluminium block frame, profile type 1  
Fitting behind the opening

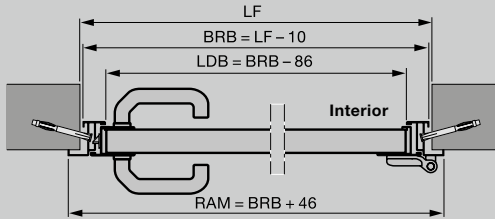


Side door with aluminium corner frame, profile type 1  
or 2  
Internal fitting

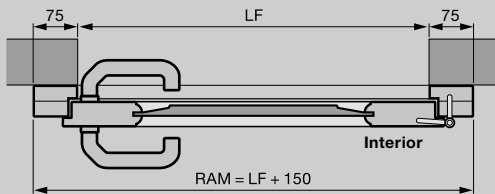

Solid timber side door  
Fitting behind the opening

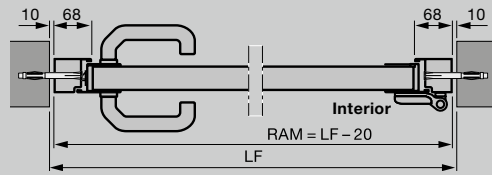

Side door with aluminium block frame, profile type 2  
Fitting in the opening

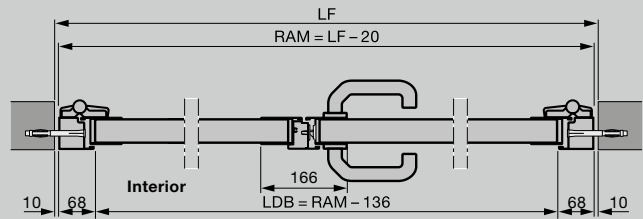


Double-leaf side door with aluminium block frame, profile type 2  
Fitting in the opening


#### ■ NEW

- Double-leaf side door with asymmetrical division
- Double-leaf side door opening inwards


## Vertical views

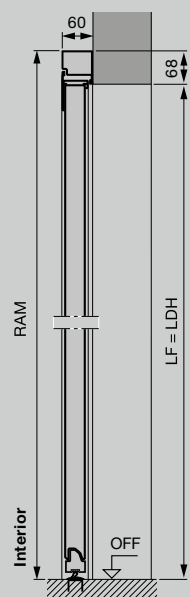


Side door with aluminium  
block frame, profile type 2  
Fitting behind the opening

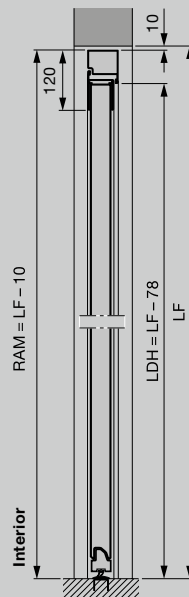

Side door with aluminium  
block frame, profile type 2  
Fitting in the opening

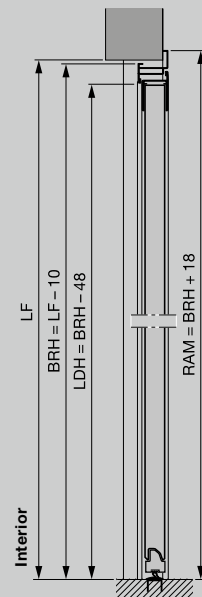

Side door with aluminium  
corner frame, profile type 2  
External fitting

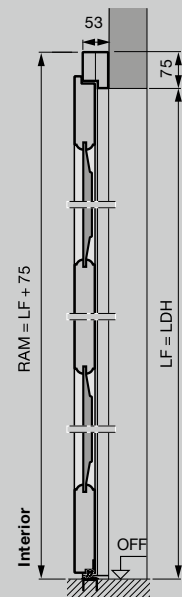

Solid timber side door  
Fitting behind the opening

## Steel side doors

### Profile type 1 (fitting behind the opening) with S-, M-, L-ribbing, S-panelled, block frame

| Structural opening       | Ordering size = RAM | Lever height* from FFL | Door section height B |
|--------------------------|---------------------|------------------------|-----------------------|
| 855 – 875 × 1990 – 2000  | 990 × 2058          | 955                    | 500                   |
| 855 – 875 × 2115 – 2125  | 990 × 2183          | 1010                   | 531                   |
| 980 – 1000 × 1990 – 2000 | 1115 × 2058         | 955                    | 500                   |
| 980 – 1000 × 2115 – 2125 | 1115 × 2183         | 1010                   | 531                   |

### Profile type 2 (fitting behind the opening) with S-, M-, L-, D-, T-ribbing, S-panelled, block frame

| Structural opening       | Ordering size = RAM | Lever height* from FFL | Door section height B |
|--------------------------|---------------------|------------------------|-----------------------|
| 855 – 875 × 1990 – 2000  | 990 × 2058          | 1050                   | 500                   |
| 855 – 875 × 2115 – 2125  | 990 × 2183          | 1050                   | 531                   |
| 980 – 1000 × 1990 – 2000 | 1115 × 2058         | 1050                   | 500                   |
| 980 – 1000 × 2115 – 2125 | 1115 × 2183         | 1050                   | 531                   |

### Profile type 2 (fitting in the opening) with S-, M-, L-, D-, T-ribbing, block frame

| Structural opening | Ordering size = RAM | Lever height* from FFL | Door section height B |
|--------------------|---------------------|------------------------|-----------------------|
| 875 × 2000         | 855 × 1990          | 1050                   | 500                   |
| 875 × 2125         | 855 × 2115          | 1050                   | 531                   |
| 1000 × 2000        | 980 × 1990          | 1050                   | 500                   |
| 1000 × 2125        | 980 × 2115          | 1050                   | 531                   |

### Profile type 1 (only opening inwards, internal fitting) with S-, M-, L-ribbing, S-panelled, corner frame

| Ordering size = BRM | Lever height* from FFL | Door section height B |
|---------------------|------------------------|-----------------------|
| 875 × 2000          | 955                    | 500                   |
| 875 × 2125          | 1010                   | 531                   |
| 1000 × 2000         | 955                    | 500                   |
| 1000 × 2125         | 1010                   | 531                   |

### Profile type 2 (internal or external fitting) with S-, M-, L-, D-, T-ribbing, corner frame

| Ordering size = BRM | Lever height* from FFL | Door section height B |
|---------------------|------------------------|-----------------------|
| 875 × 2000          | 1050                   | 500                   |
| 875 × 2125          | 1050                   | 531                   |
| 1000 × 2000         | 1050                   | 500                   |
| 1000 × 2125         | 1050                   | 531                   |

## Solid timber side doors

| Ordering size = RAM                                         | Structural opening       | Lever height* from FFL |
|-------------------------------------------------------------|--------------------------|------------------------|
| <b>Fitting behind the opening (S-, M-, L-ribbed, panel)</b> |                          |                        |
| 1005 × 2190                                                 | 855 – 875 × 2115 – 2125  | 1050                   |
| 1130 × 2190                                                 | 980 – 1000 × 2115 – 2125 | 1050                   |

### Fitting behind the opening (style 401, 403, 404, 405)

|             |                          |      |
|-------------|--------------------------|------|
| 1130 × 2190 | 980 – 1000 × 2115 – 2125 | 1050 |
|-------------|--------------------------|------|

Dimensions in mm

## Explanations

P1 Profile type 1 (narrow surround)  
P2 Profile type 2 (broad surround)

LDB Clear passage width  
LDH Clear passage height  
RAM Overall frame dimension  
LF Structural opening  
BRM Nominal size  
BRB Nominal size - width  
BRH Nominal size - height  
OFF Finished floor level

### Special sizes

Single-leaf side doors on request

Double-leaf side doors:

1330 – 2500 × 1960 – 2558 mm

\* You can find the lever heights for special sizes in the technical manual.

For further information, please see the fitting data or contact your Hörmann partner.