


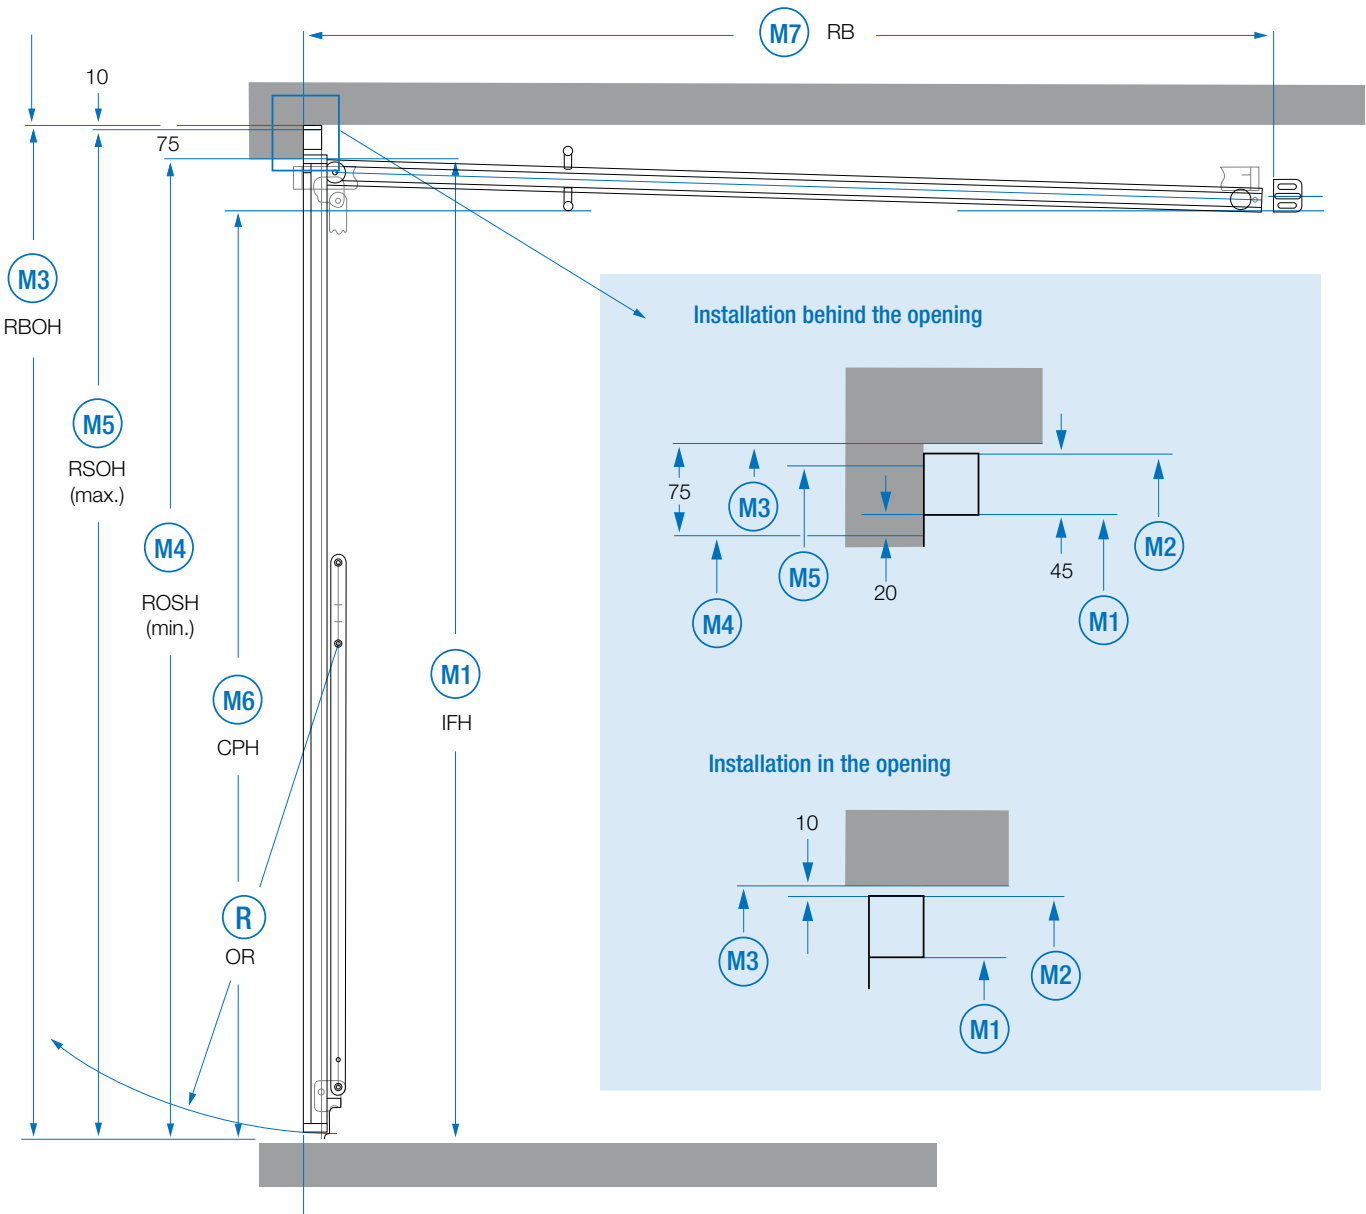

Technical Specifications


Order Height	M1	M2	M3	M4	M5	M6	M7	R
6'4"	1940	1985	1995	1920	1975	1810	1764	1036
6'6"	1980	2025	2035	1960	2015	1850	1724	1096
6'10"	2080	2125	2135	2060	2115	1950	1824	1145
7'	2135	2180	2190	2115	2170	2005	1879	1175

Dimensions in table (above and legend (right)) in millimetres.




IFH (M1) Internal Frame Height
OFH (M2) Overall Frame Height (IFH+45)
RBOH (M3) Rec. Brickwork Opening Height (IFH+55)
ROSH min. (M4) Rec. Opening Size Height min. (IFH-20)
ROSH max. (M5) Rec. Opening Size Height max. (IFH+35)
CPH (M6) Clear Passage Height (IFH-130)*
RB (M7) Required Backroom (IFH-177)
OR (R) Opening Radius

*For Vivoport II® doors CPH = IFH-150mm)

Fitting behind the opening

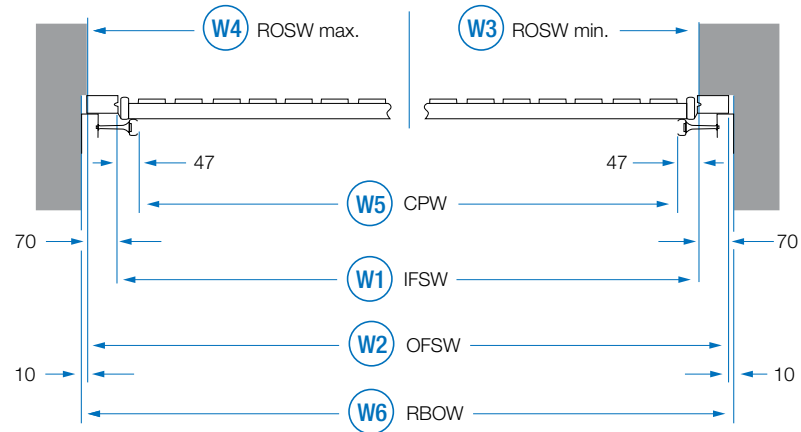

Fitting within the opening

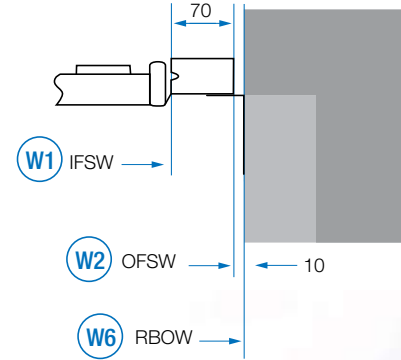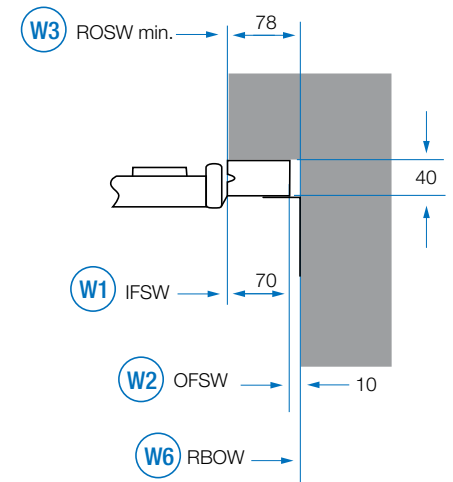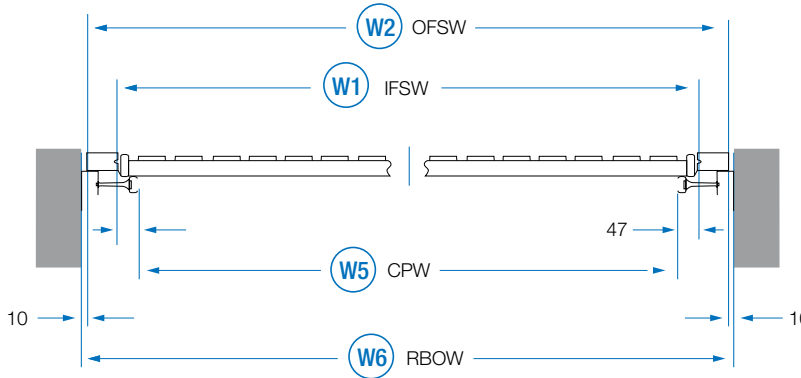

Order Width	W1	W2	W3	W4	W5	W6
6'10"	2081	2221	2085	2210	1987	2240
7'	2126	2266	2130	2255	2032	2285
7'3"	2211	2351	2215	2340	2117	2370
7'5"	2261	2401	2265	2390	2167	2420
7'6"	2286	2426	2290	2415	2192	2445
8'	2441	2581	2445	2570	2347	2600

Dimensions in table (above and legend (right)) in millimetres.

IFSW (W1) Inner Frame Size Width
OFSW (W2) Overall Frame Size Width (IFSW+140)
ROSW min. (W3) Rec. Opening Size Width min. (IFSW+4)
ROSW max. (W4) Rec. Opening Size Width max. (IFSW+129)
CPW (W5) Clear Passage Width (IFSW-94)
RBOW (W6) Rec. Brickwork Opening Width (IFSW+159)