





SeceuroGlide Sectional Elite Fitting Instructions






SeceuroGlide | Sectional Elite
Side Mounted System

Fitter's Information Pack - SeceuroGlide Sectional Elite

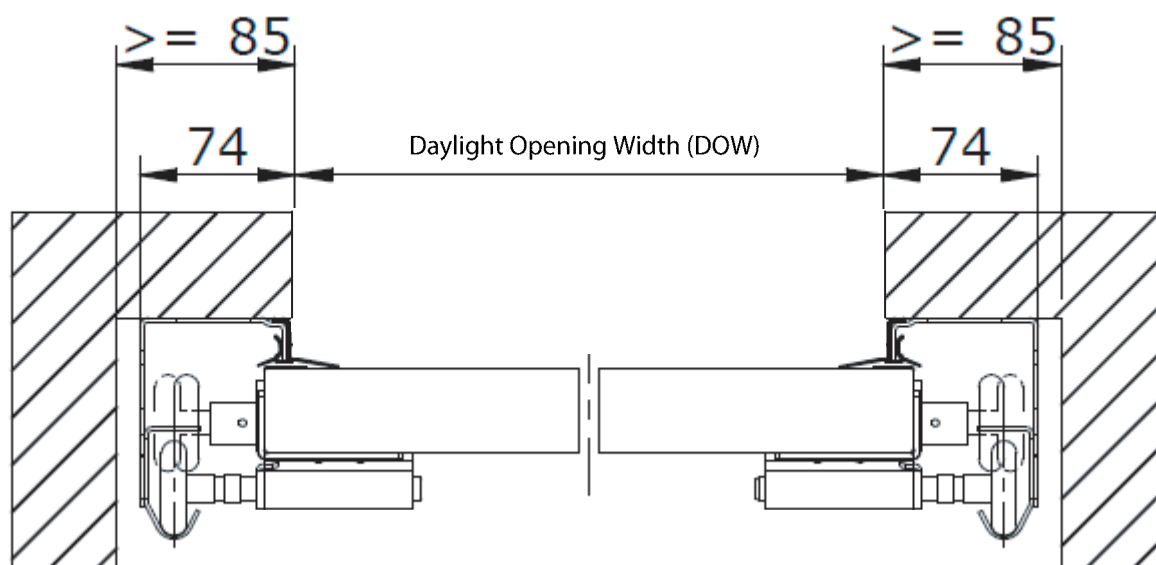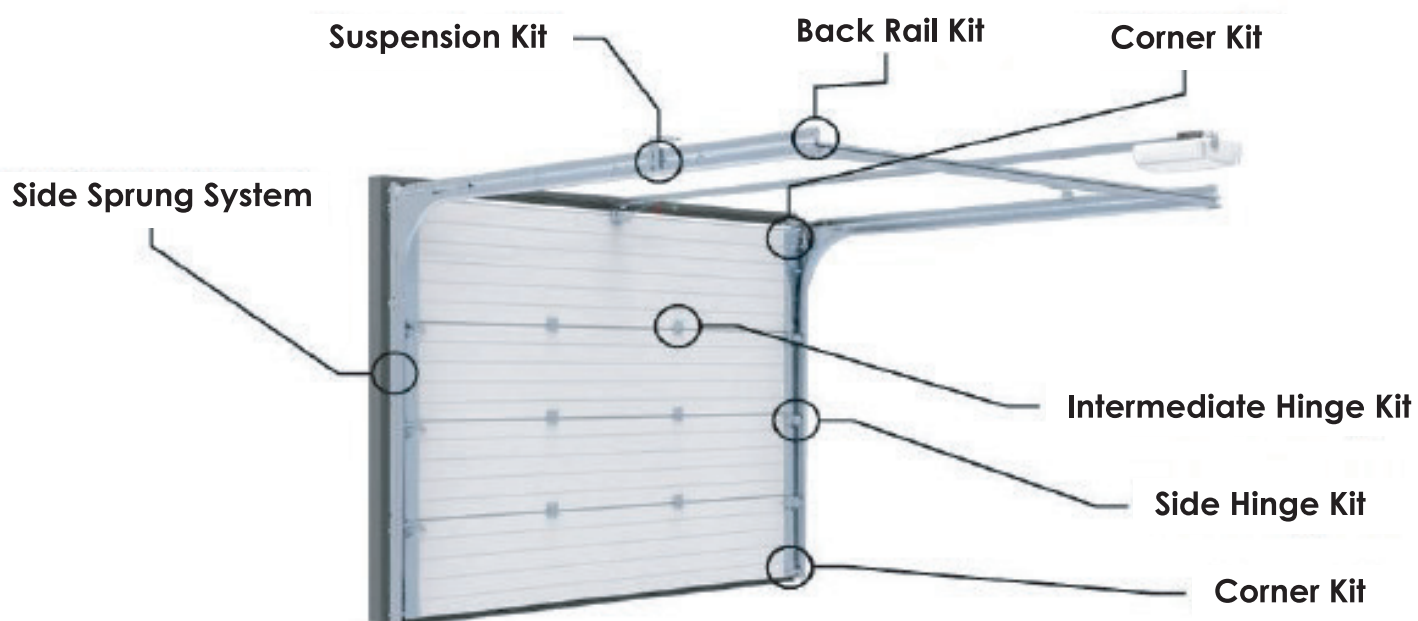

 EN 12604
 EN 12453
 EN 13241

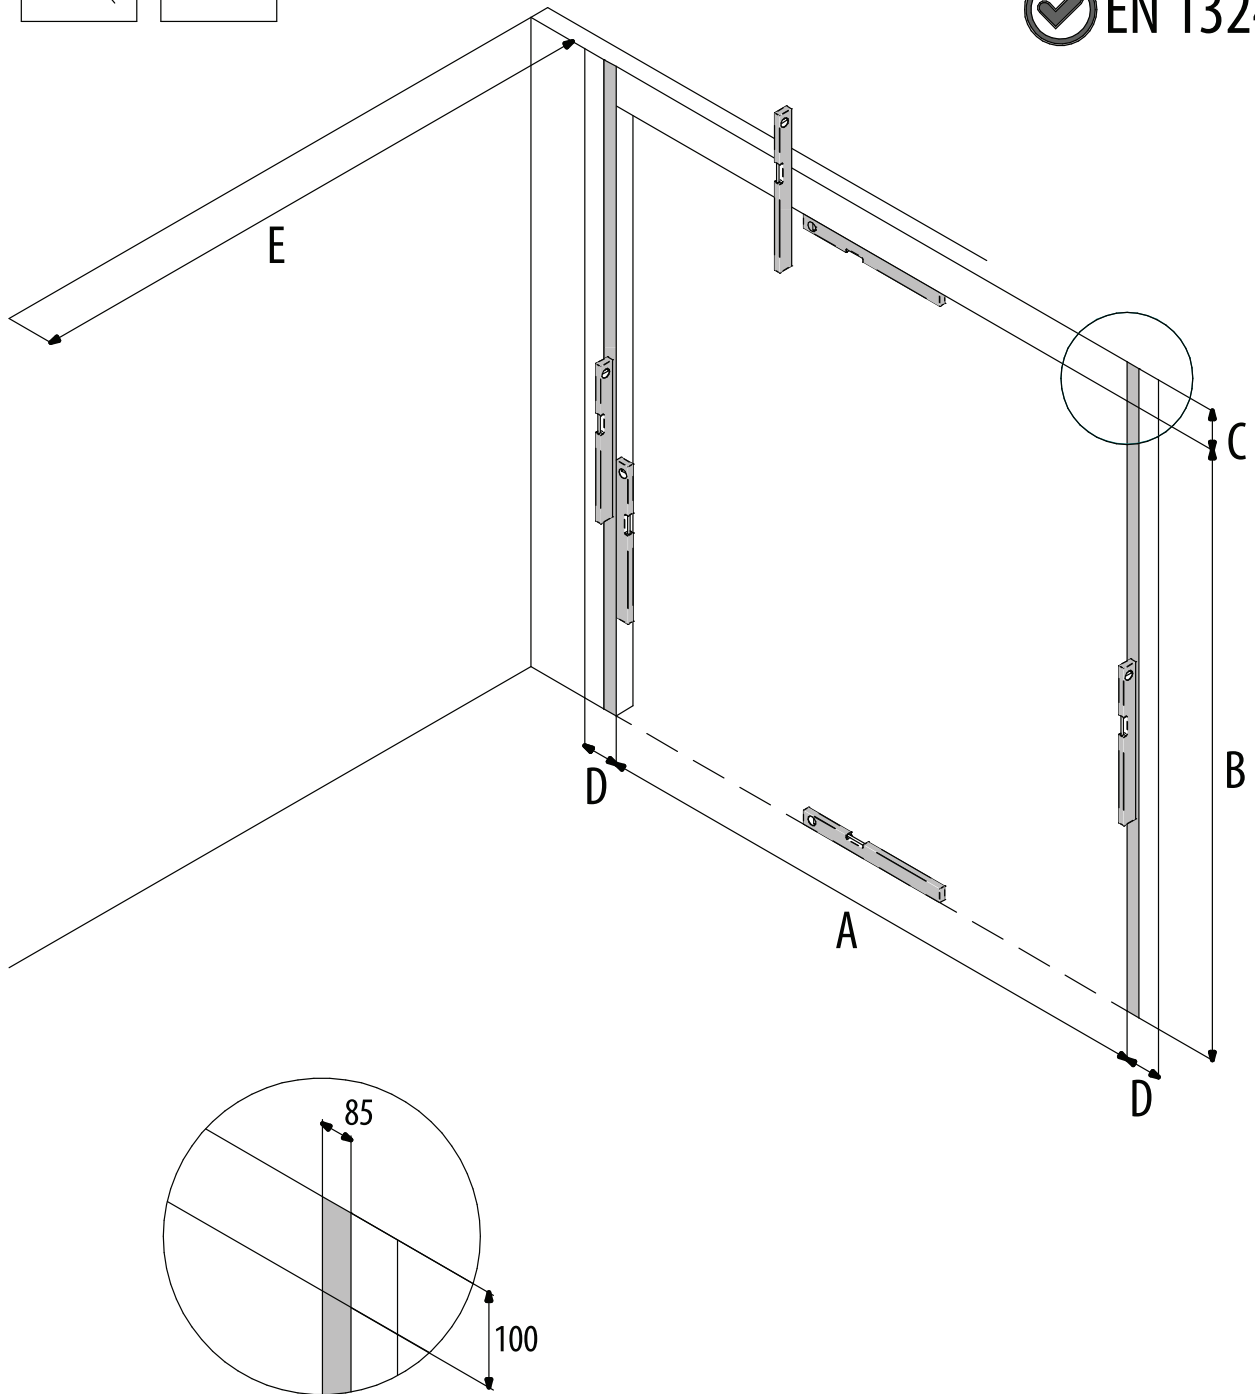

A	B	C	D	E
DLW	DLH	FHR	FSR	FMD
Daylight Width	Daylight Height	Free Head Room	Free Side Room	Free Mounting Dept

9642



Only remove wing screw after mounting door leaf (without top section).

ATTENTION !!

The springs are pre-tensioned !!

Der Flügelschraube erst nach Torblattmontage (ohne Obere Sektion) entfernen.

ACHTUNG !!

Die Federn haben Vorspannung !!

Enlever la vis à oreilles une fois le tablier (sans la section haute) monté.


ATTENTION !!

Les ressorts sont pré-tendus !!


Vleugelschroef pas verwijderen na montage deurblad (zonder topsectie).

LET OP !!


De veren zijn voorgespannen !!

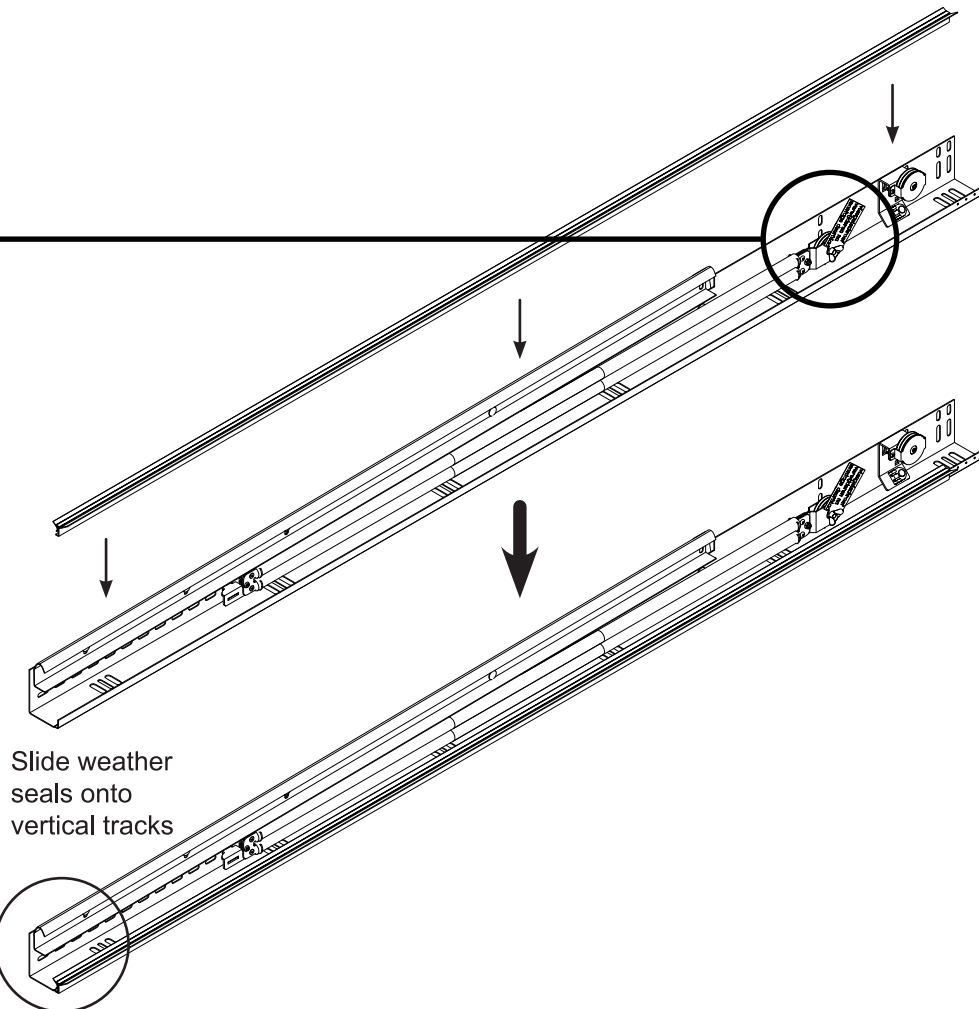


Slide weather seals onto vertical tracks






Seals are 100mm larger then needed, cut down to suit the opening

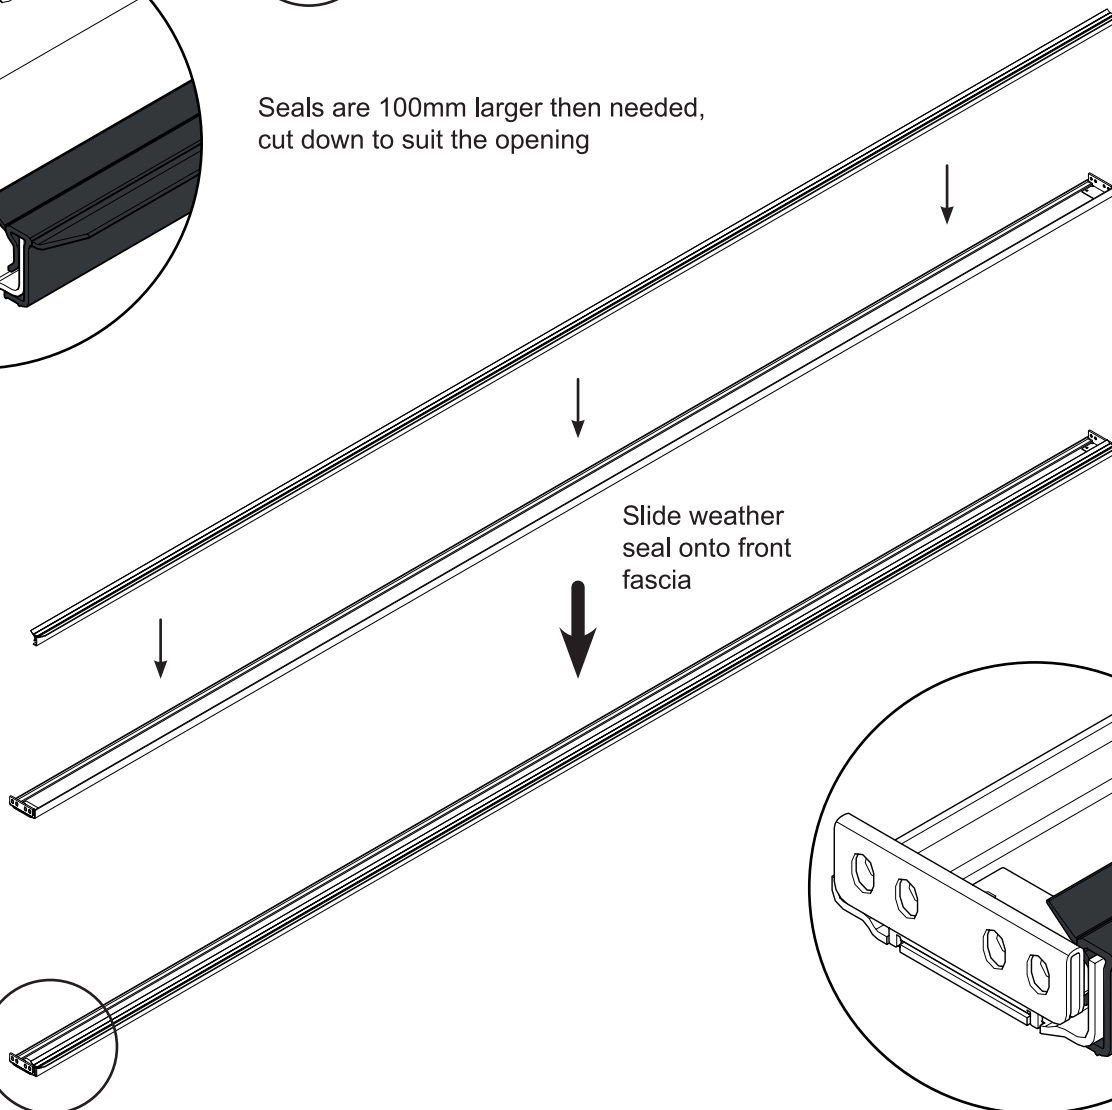



Slide weather seal onto front fascia

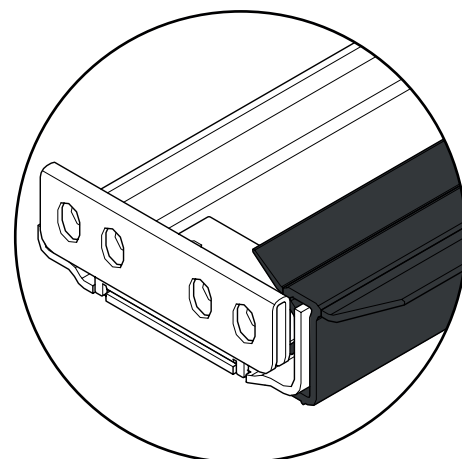


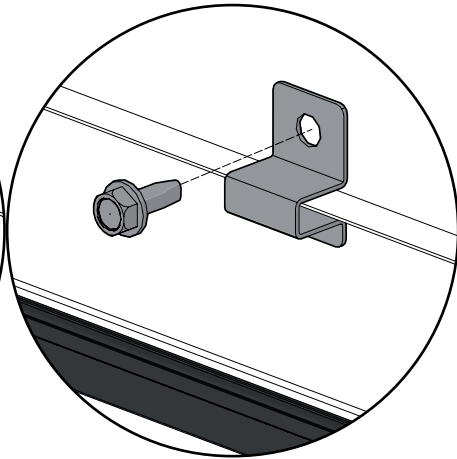
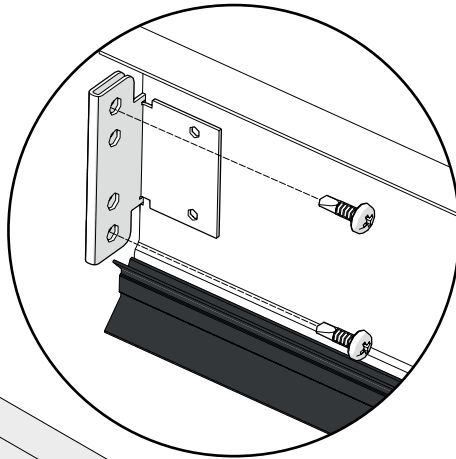



Lift fascia into place and secure






Clamp tracks to the wall

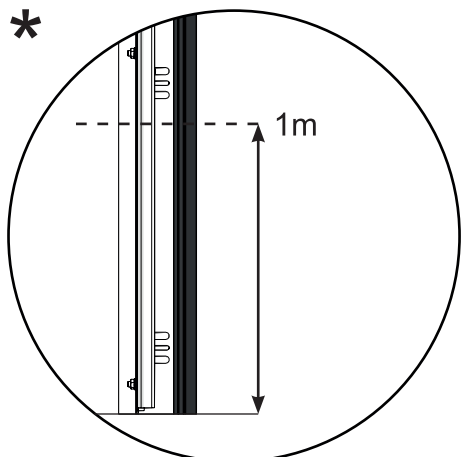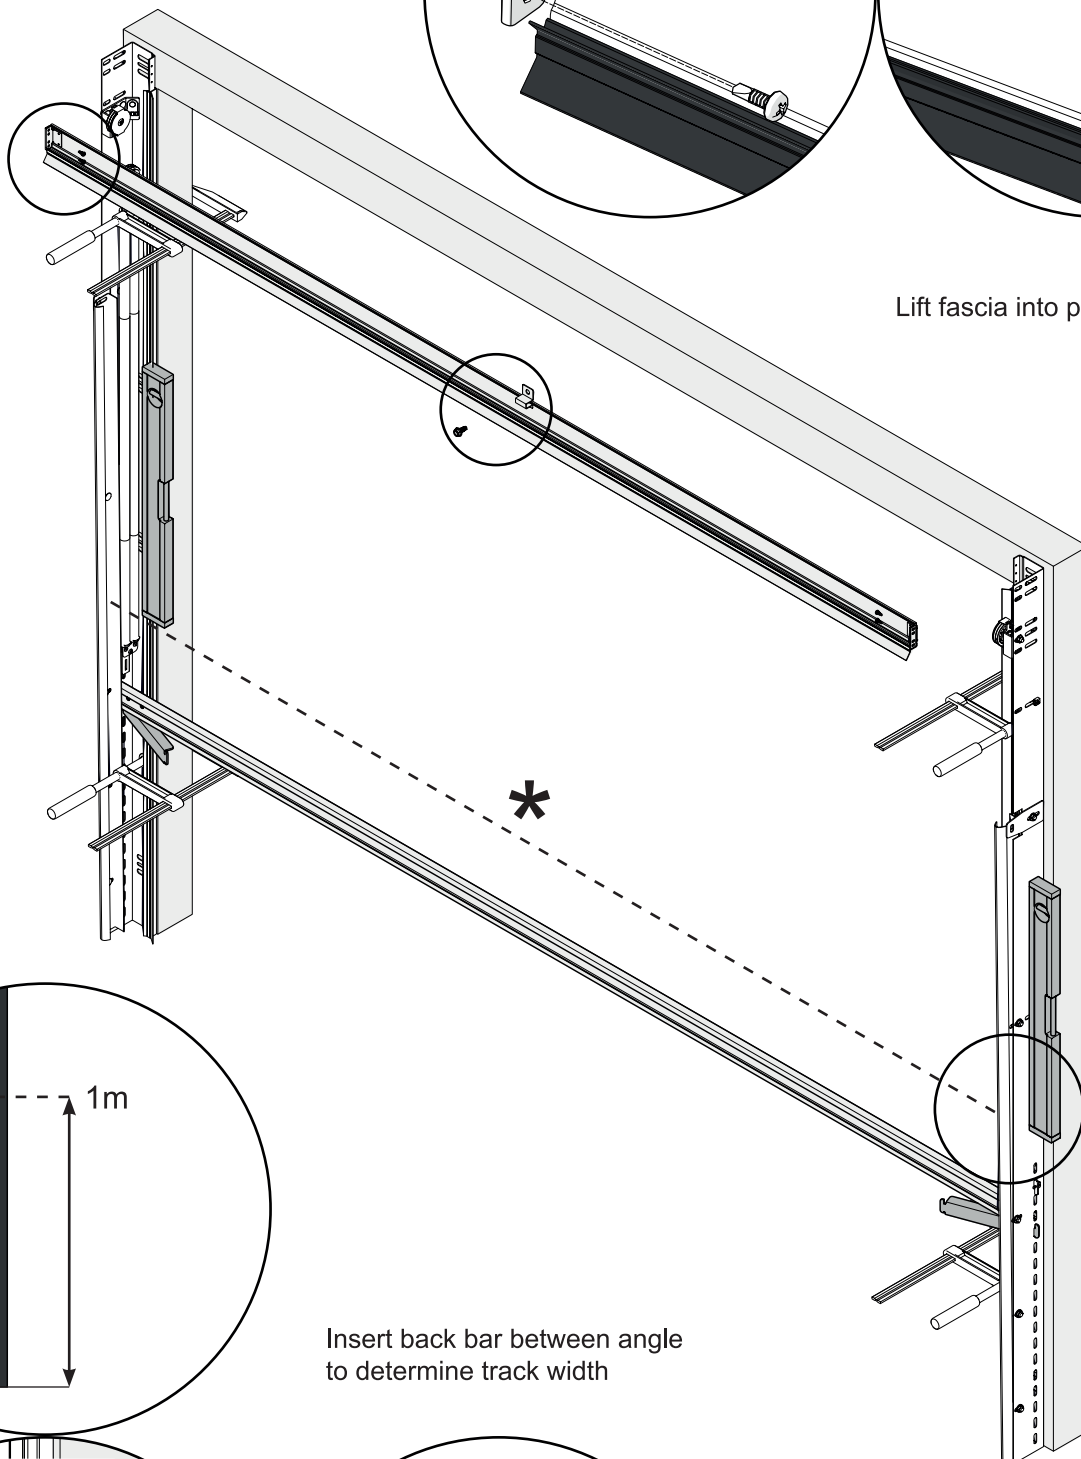


Insert back bar between angle to determine track width

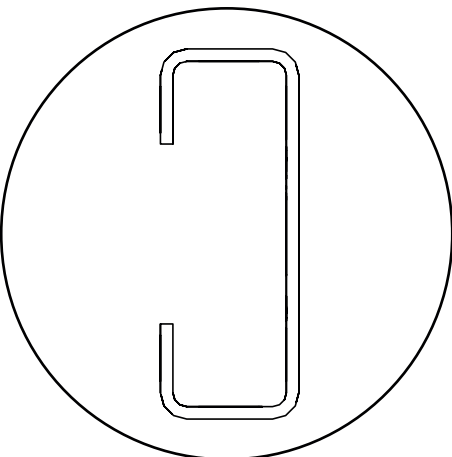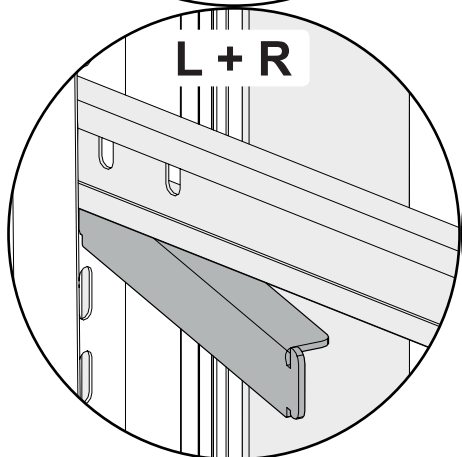




Once the frame is level, secure with the fixings below

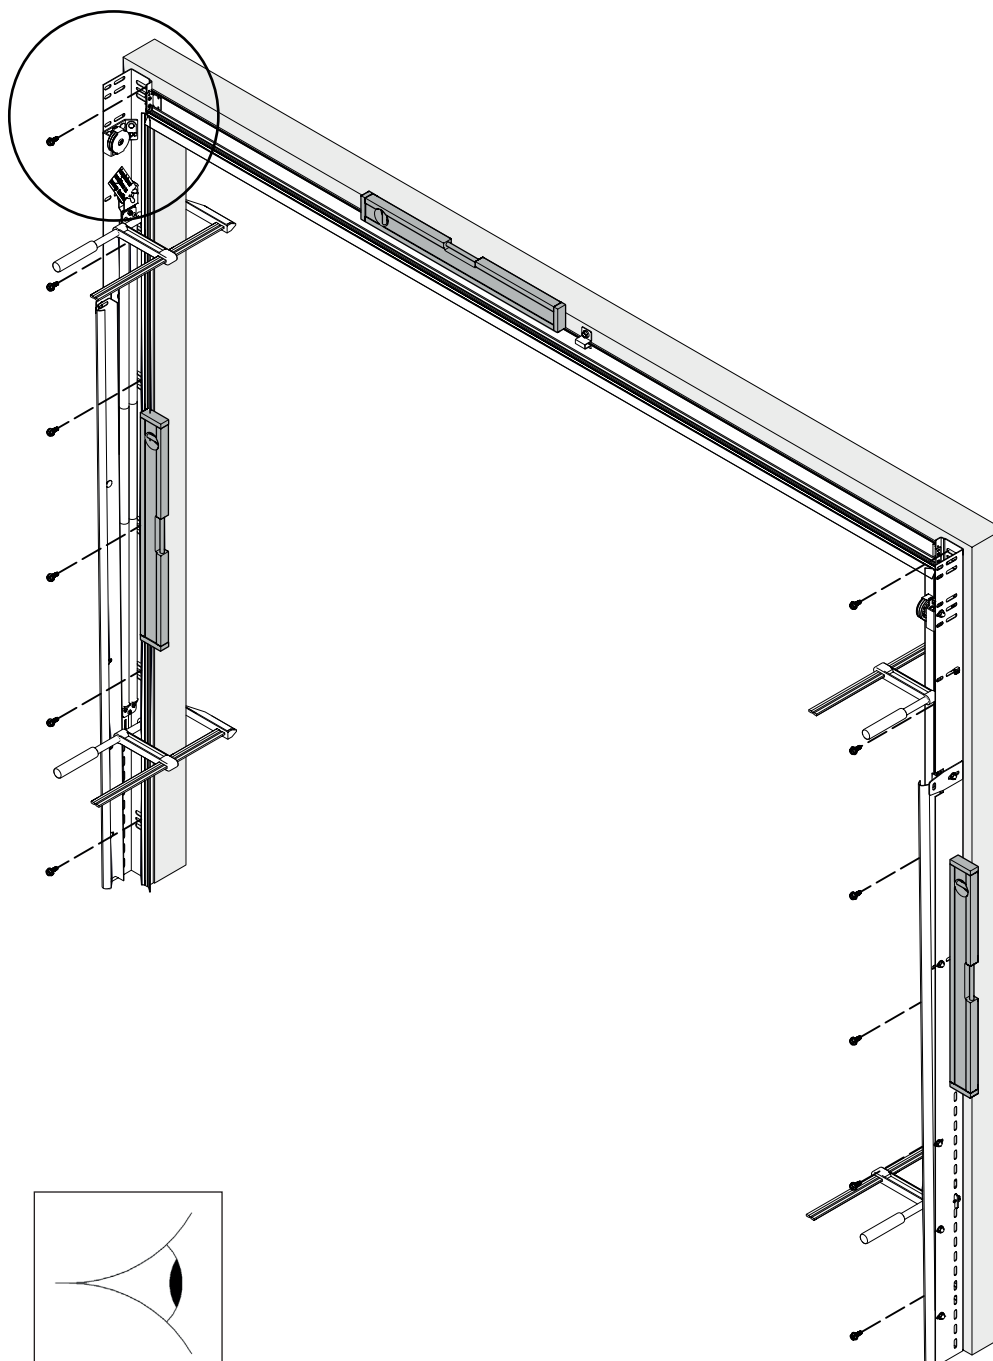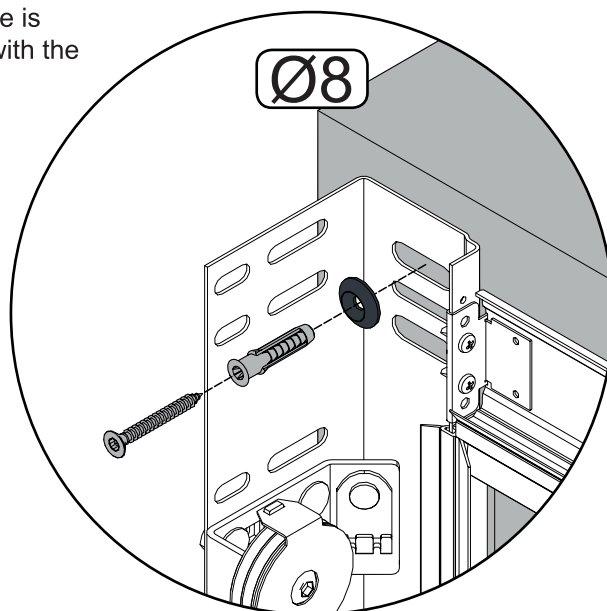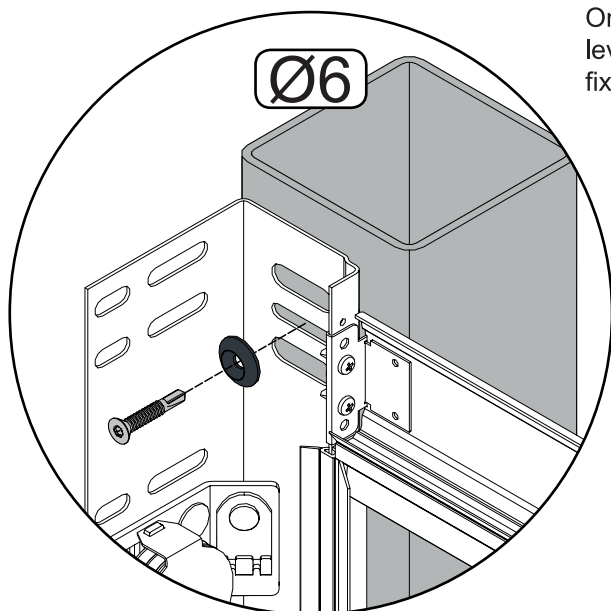






L + R

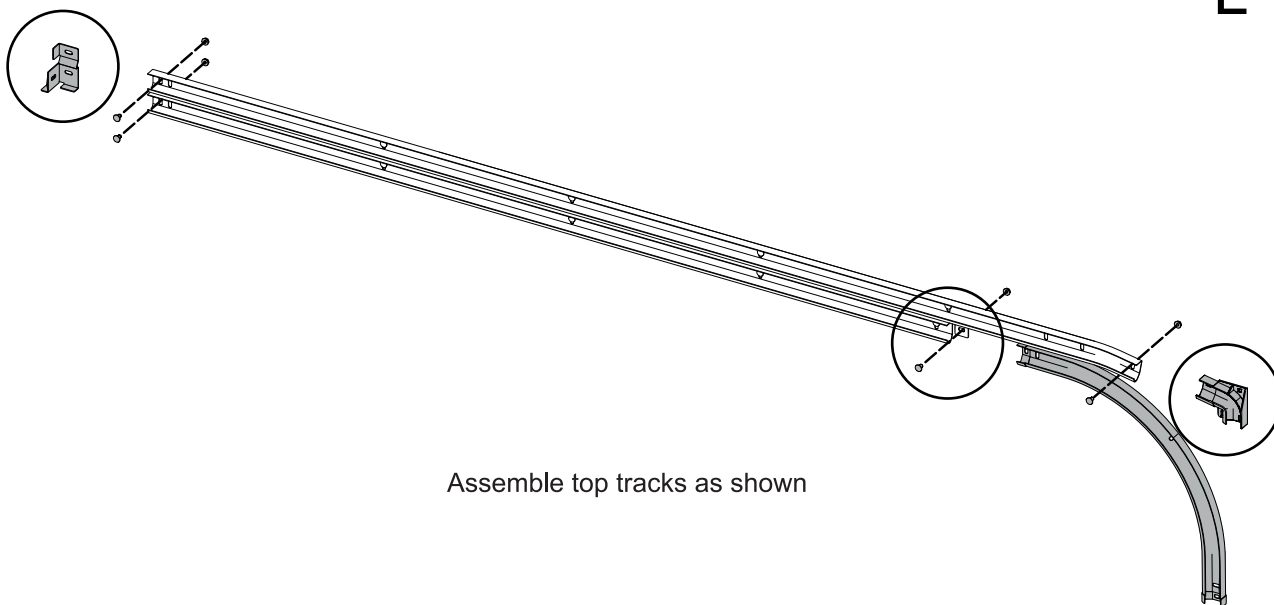



Assemble top tracks as shown

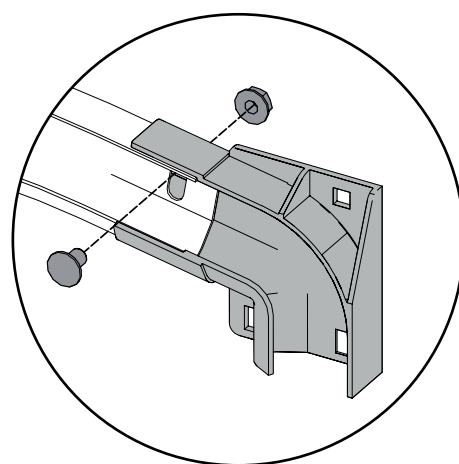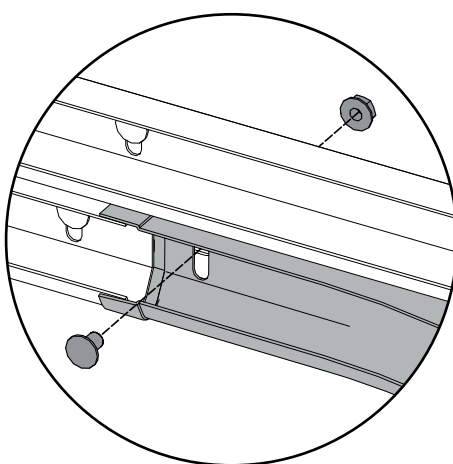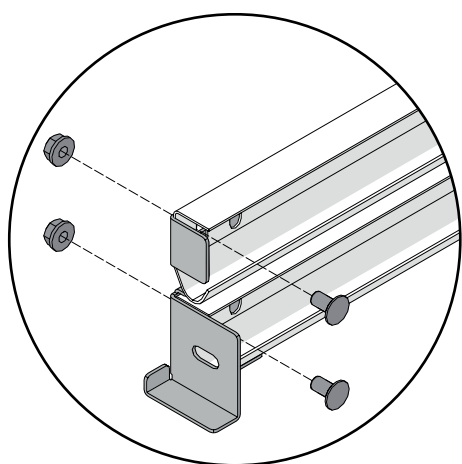





Assemble horizontal tracks as shown

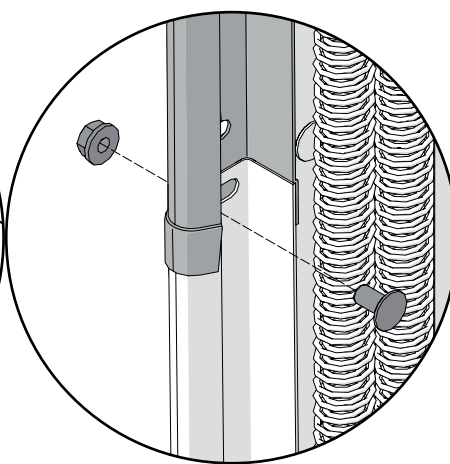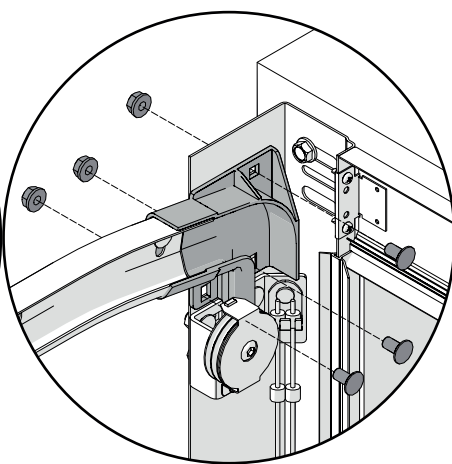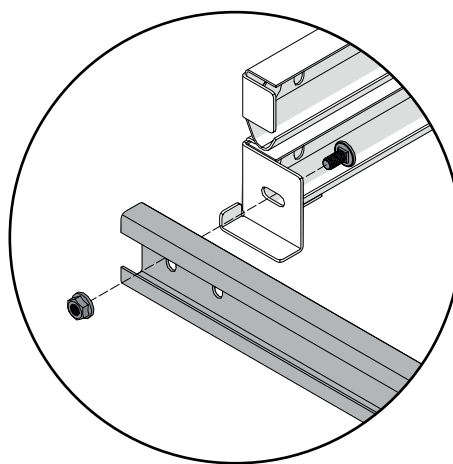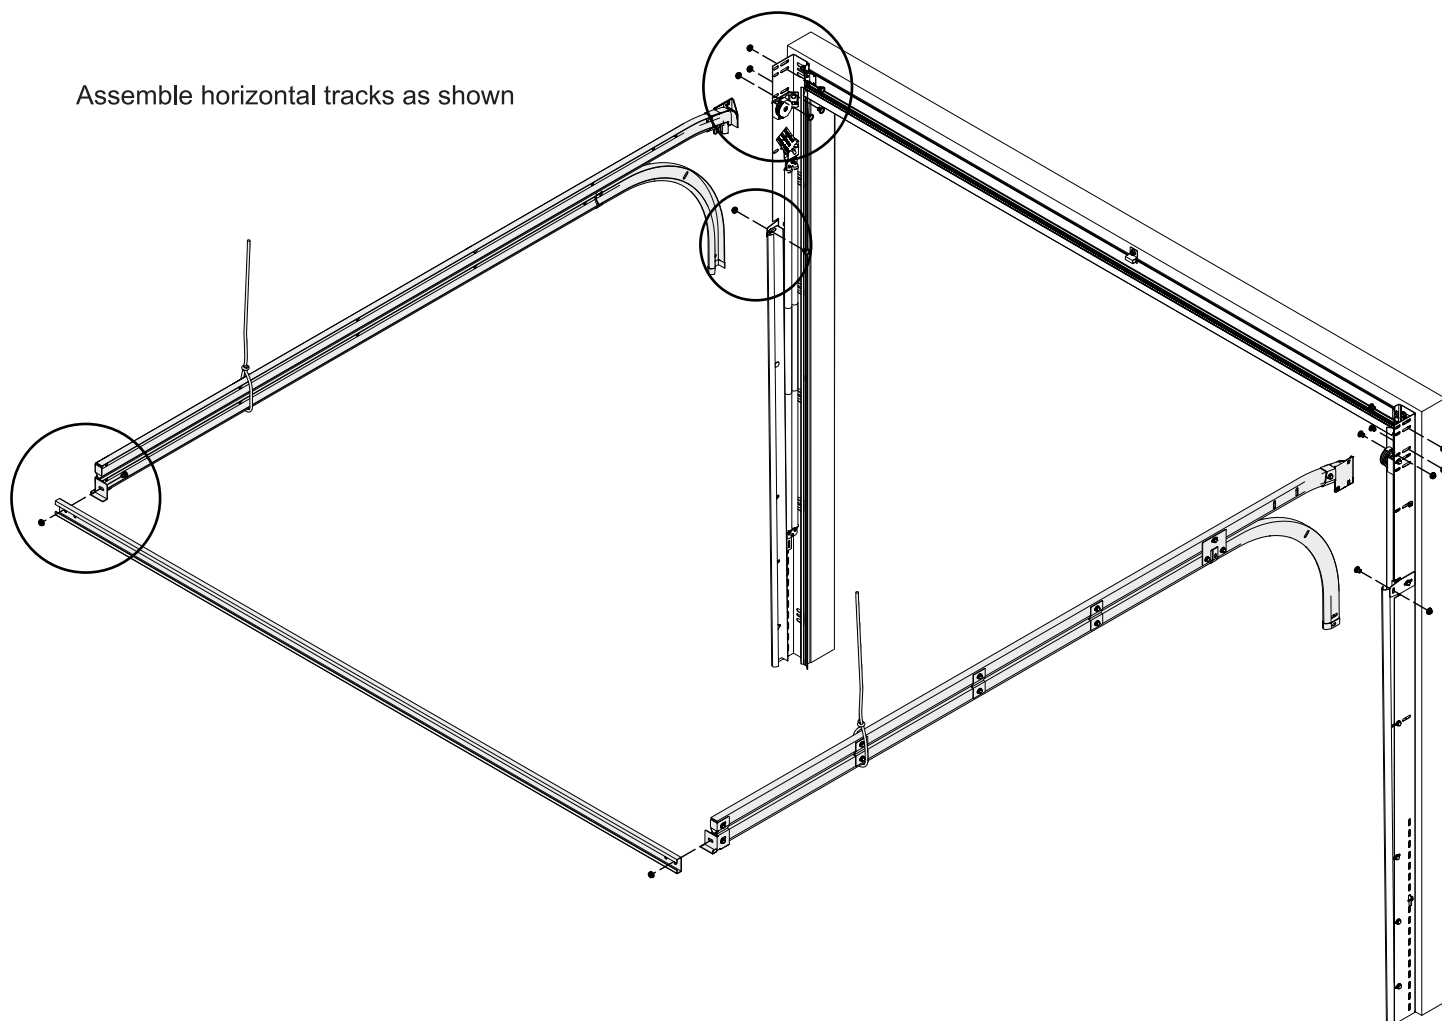






13





Fit reinforcing plates to
horizontal track and radius

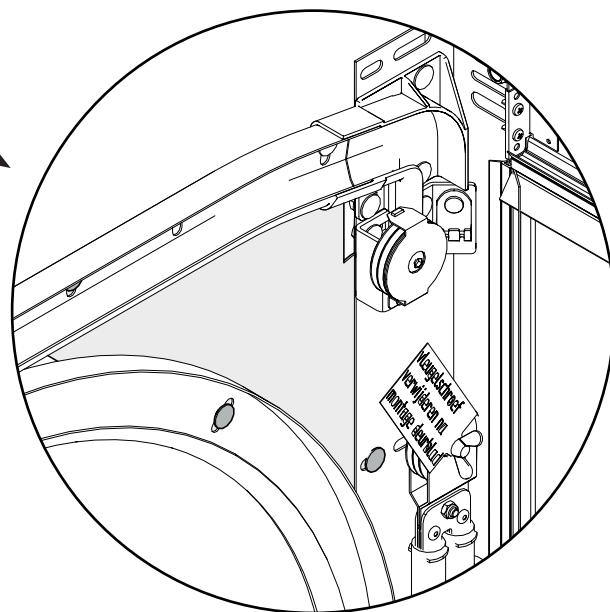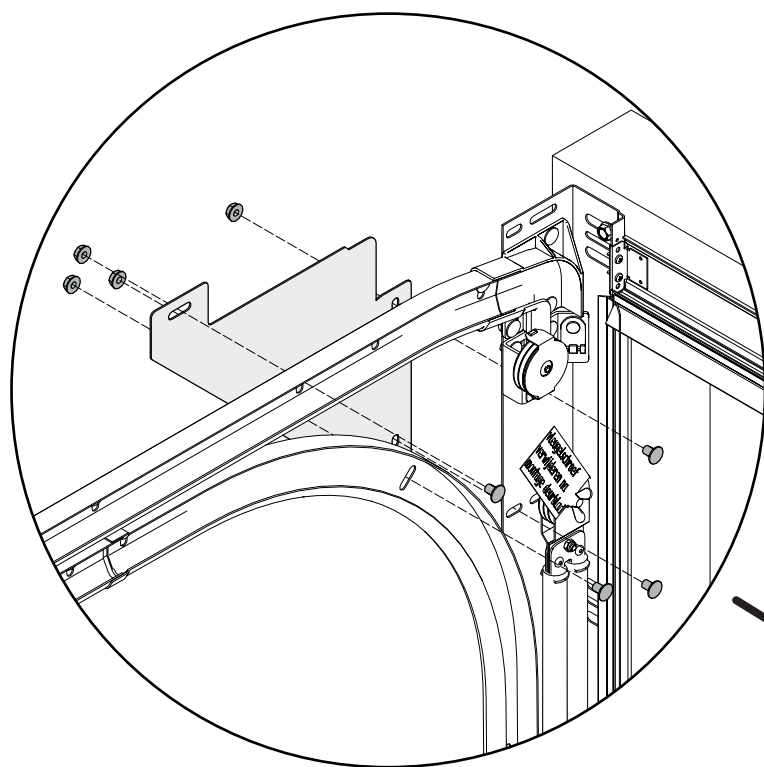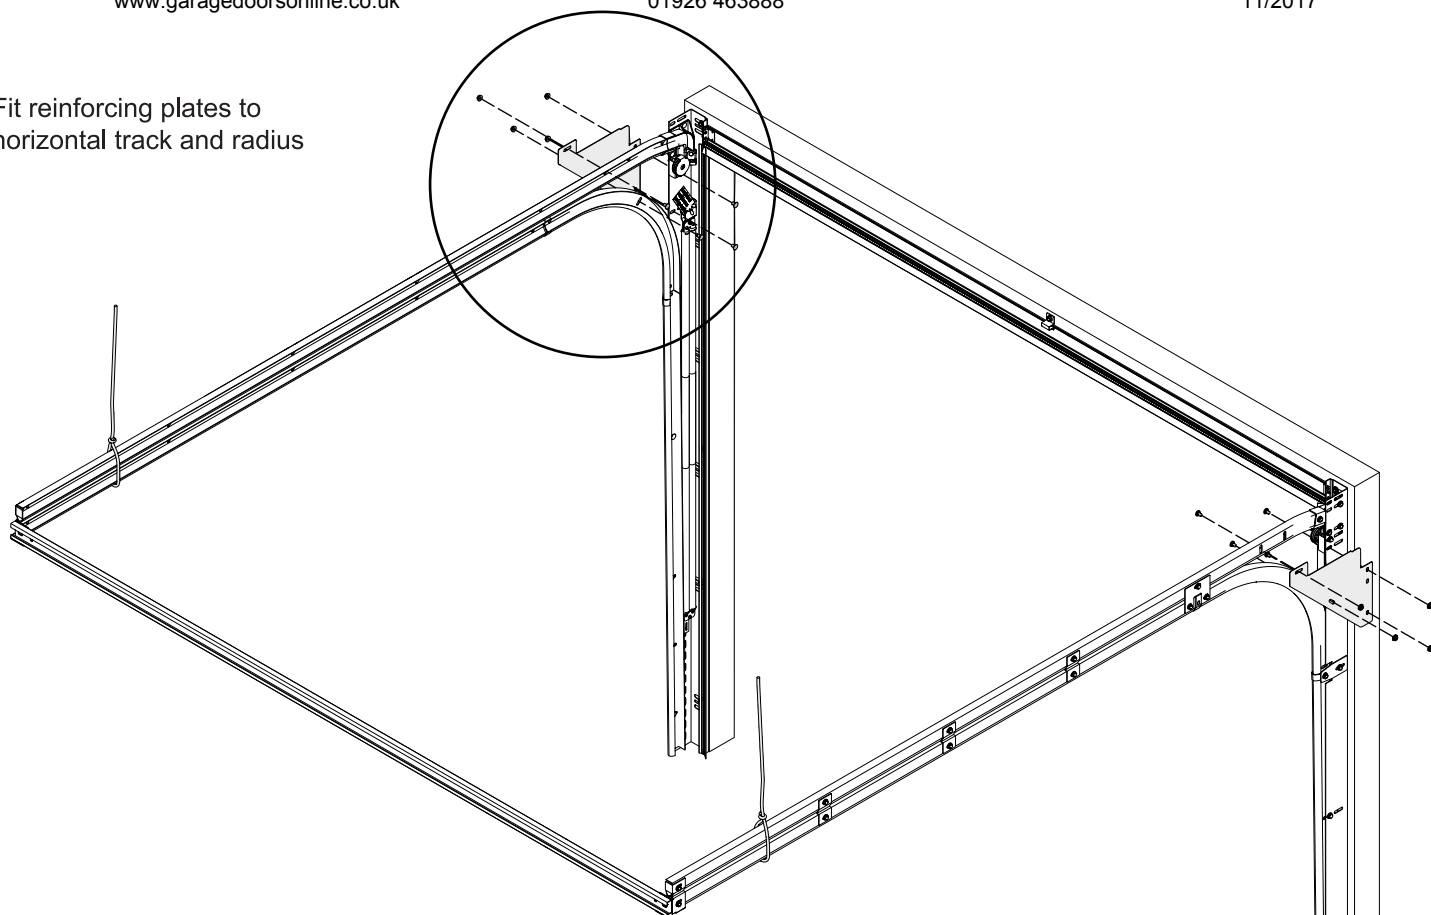


13

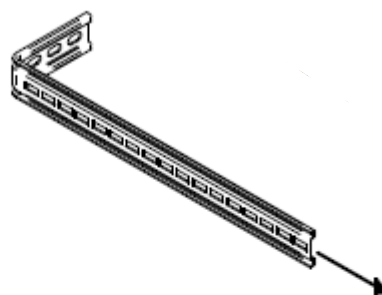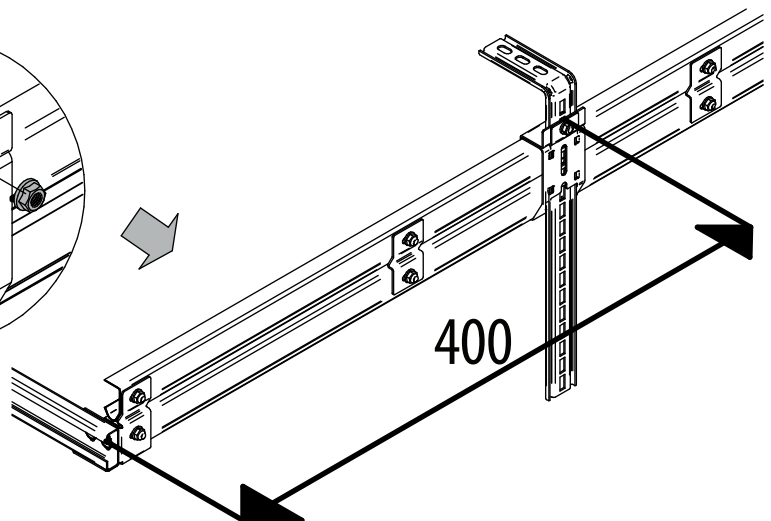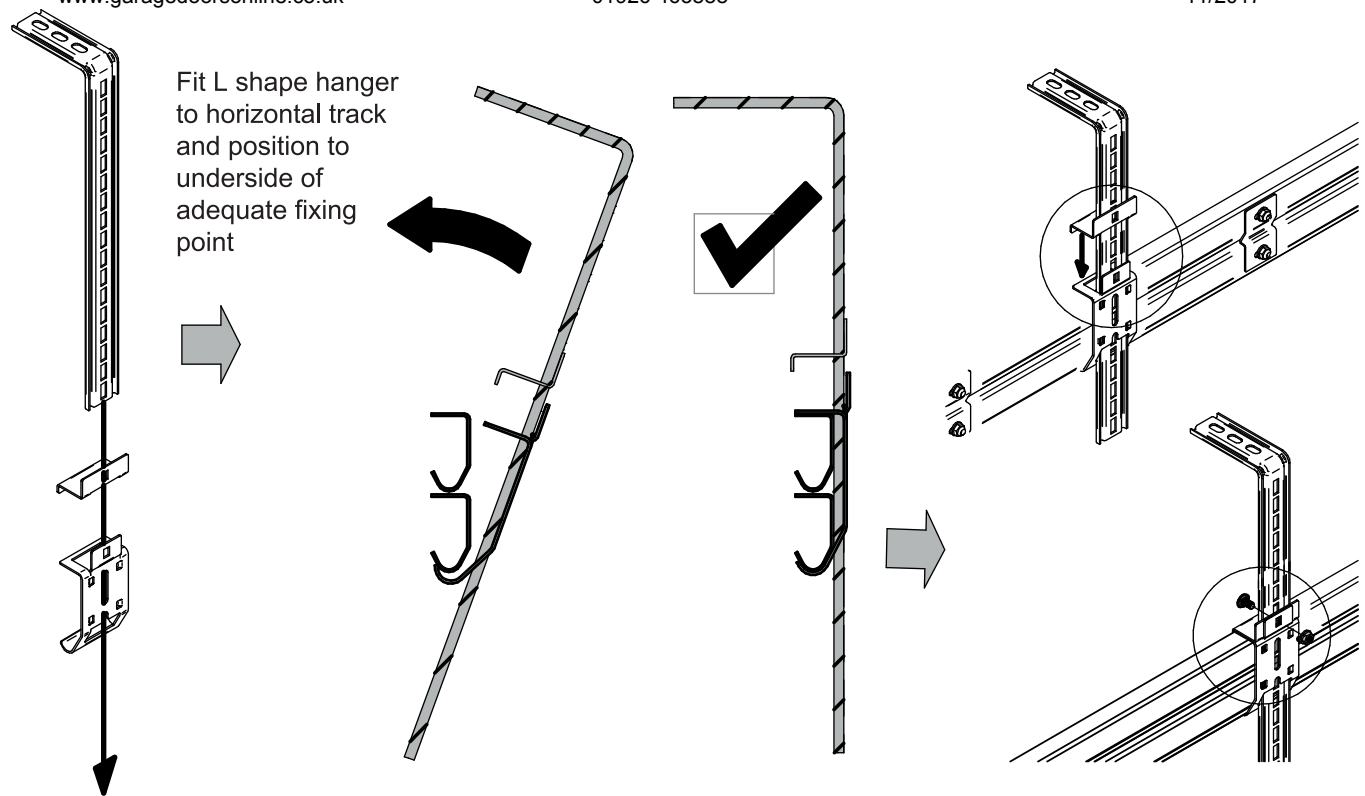



Using the L shape hangers and the clamping brackets secure the back bar to neighbouring walls

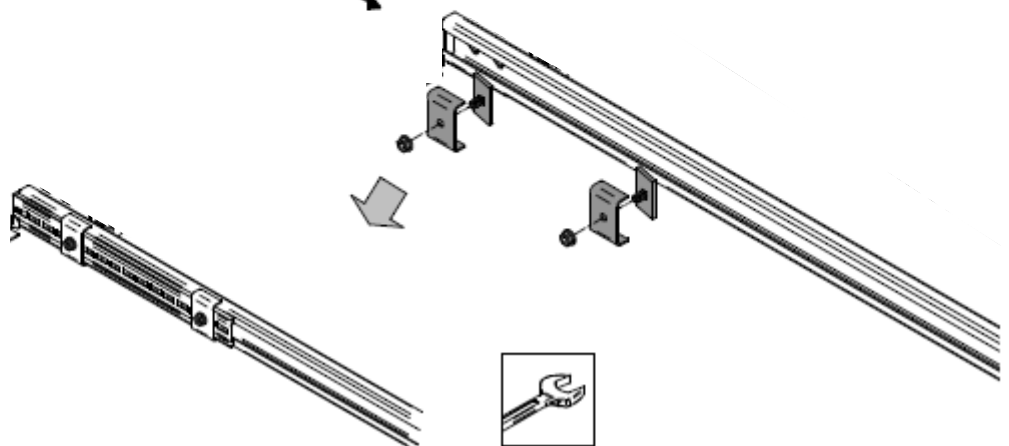

13









Measure from corner to corner to determine if the horizontal track area is square, adjust accordingly. Before securing the L shape hangers, ensure the horizontal tracks are level


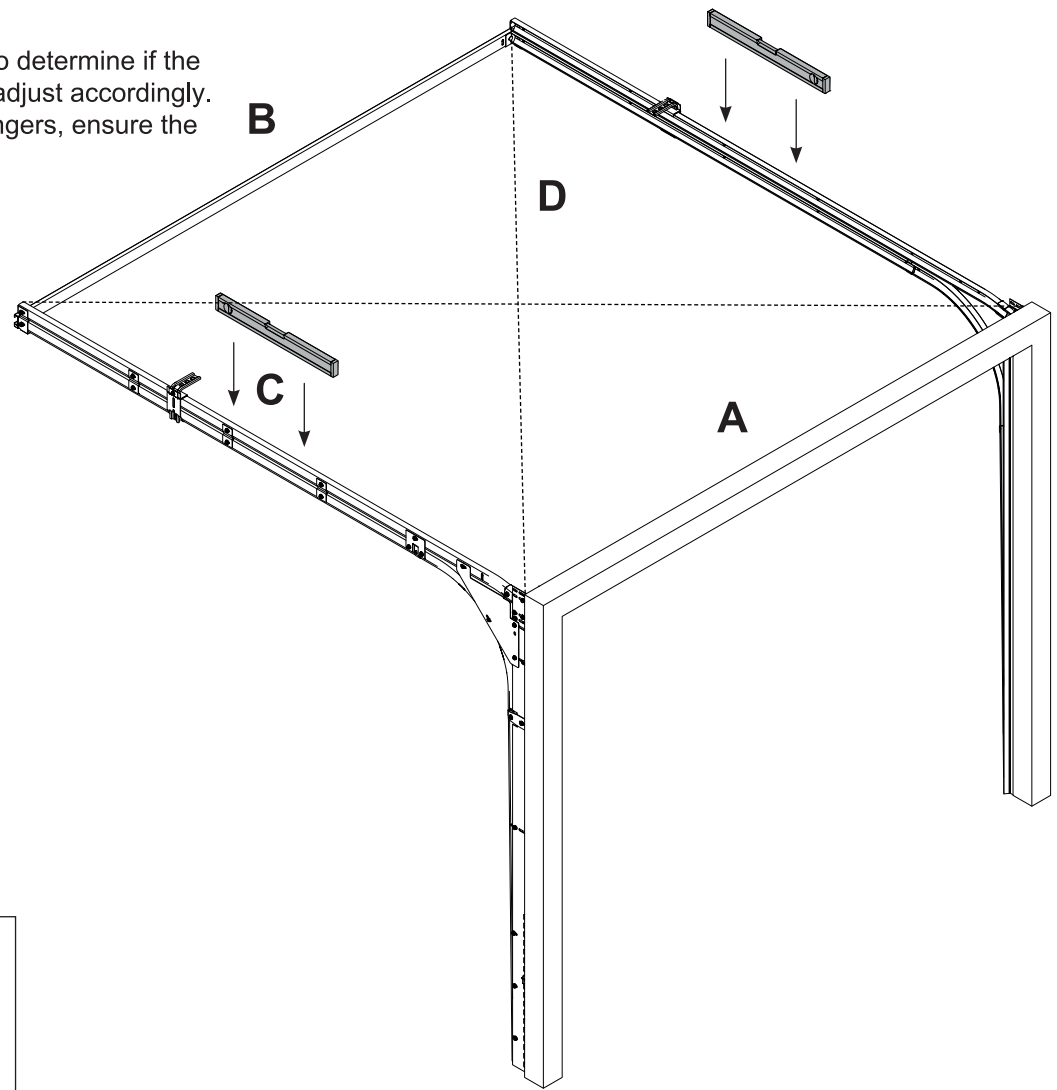






$$A = B$$

$$C = D$$

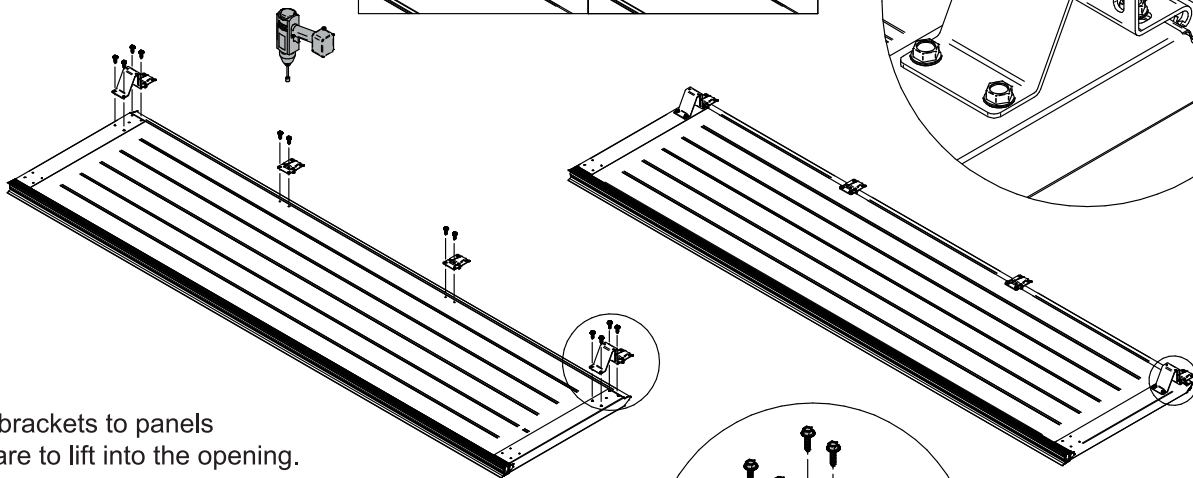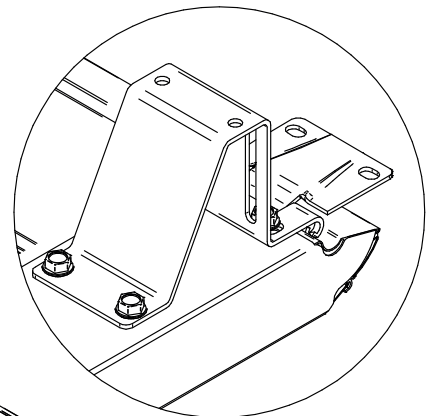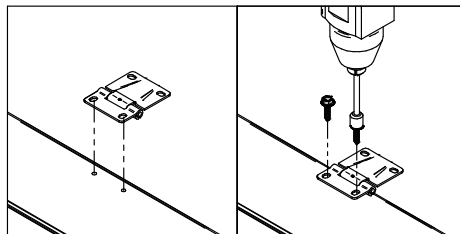


Fix roller brackets to panels and prepare to lift into the opening.



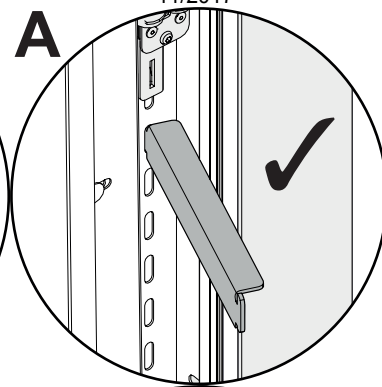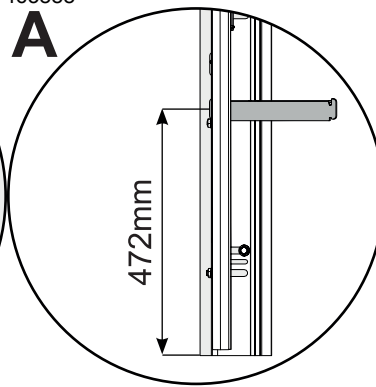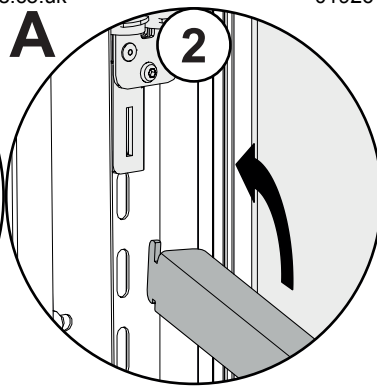
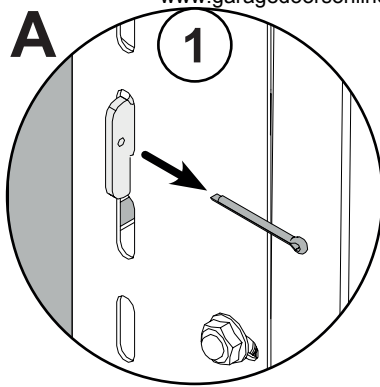


Insert the support bracket into position



Lift the panel gently to the support bracket

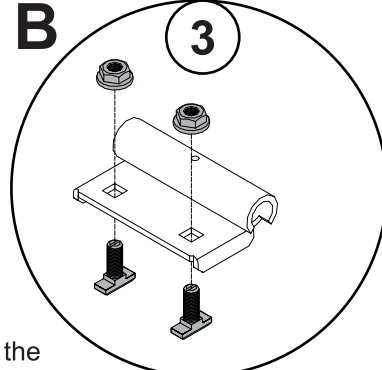



Insert roller into the top of the panel

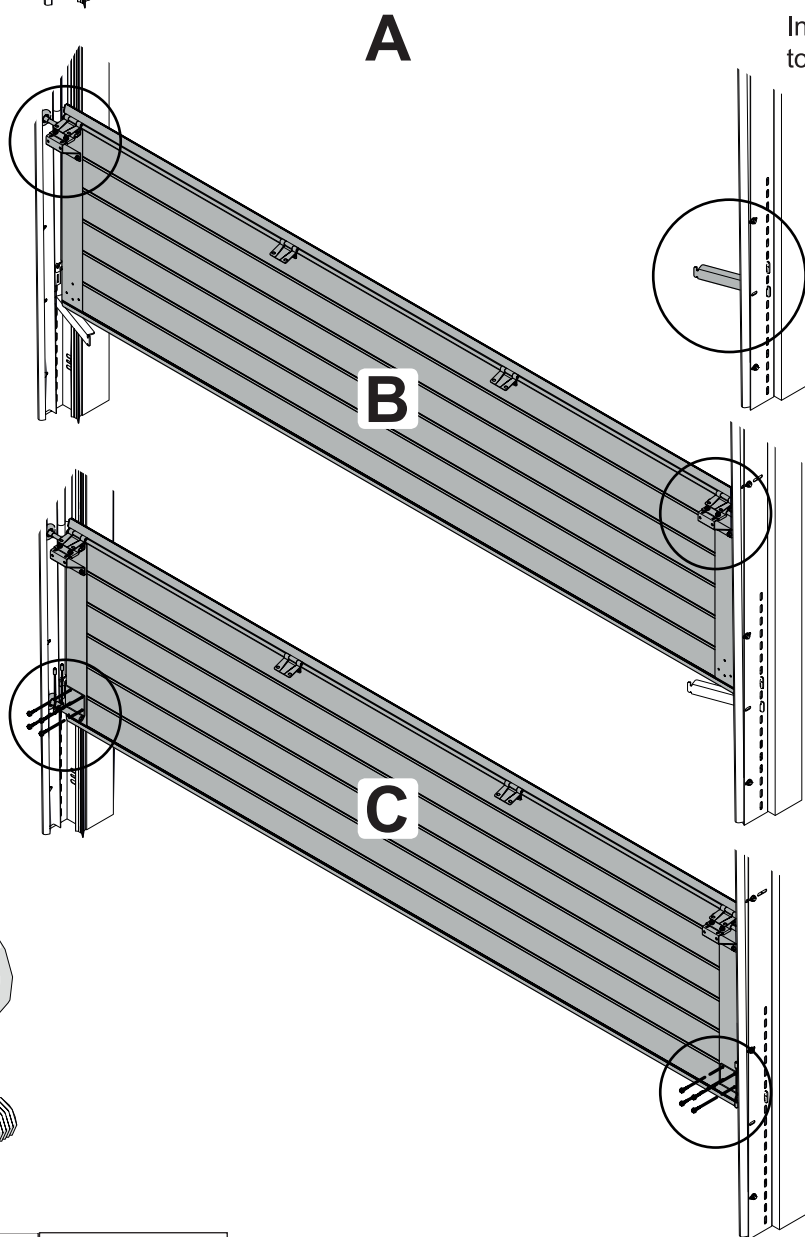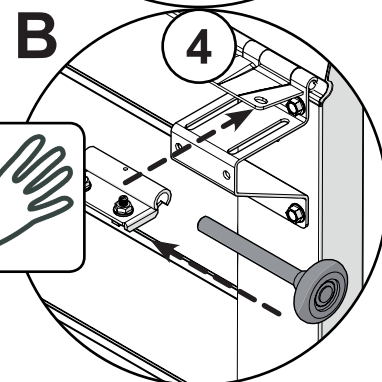


Feed the roller through the bottom of the cable.

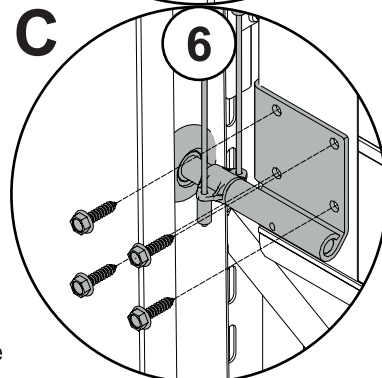
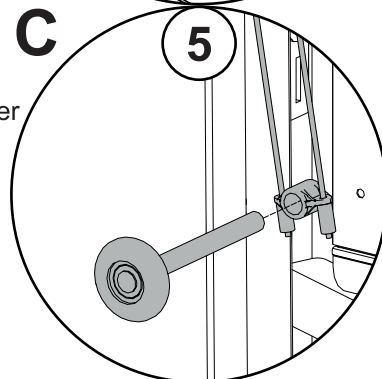


Secure the bottom of the roller to the base of the bottom panel. Repeat on both sides.

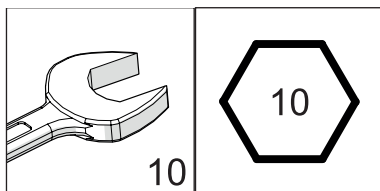



Once bottom rollers and brackets are secure lift the panel gently and remove the support brackets

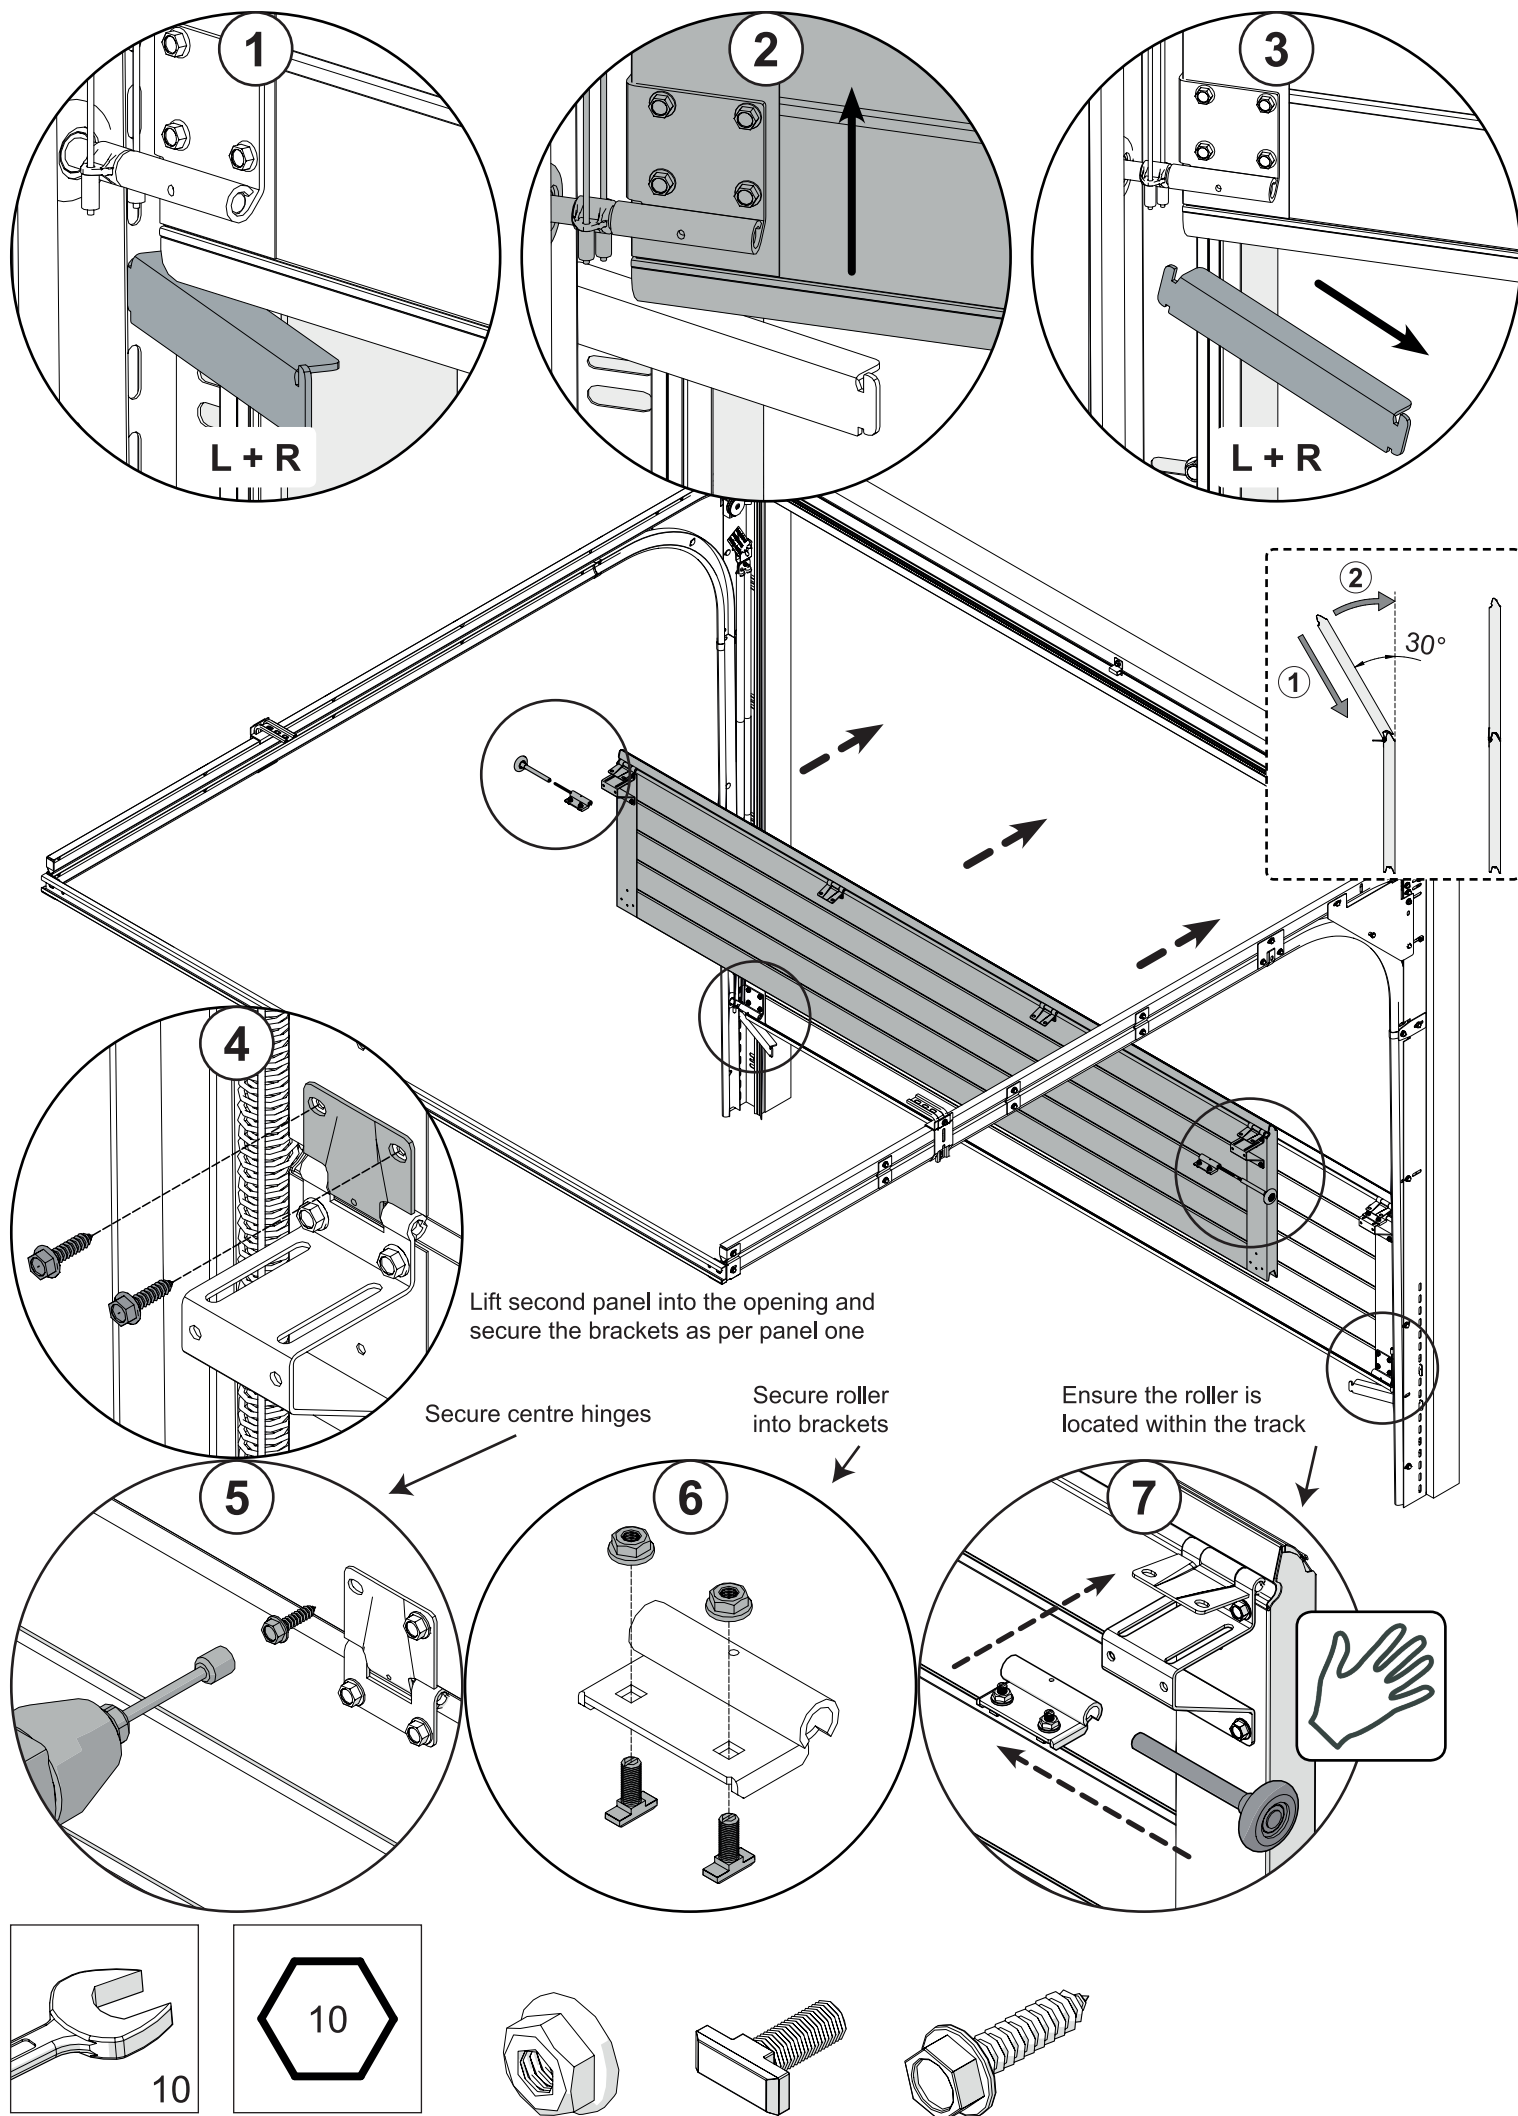


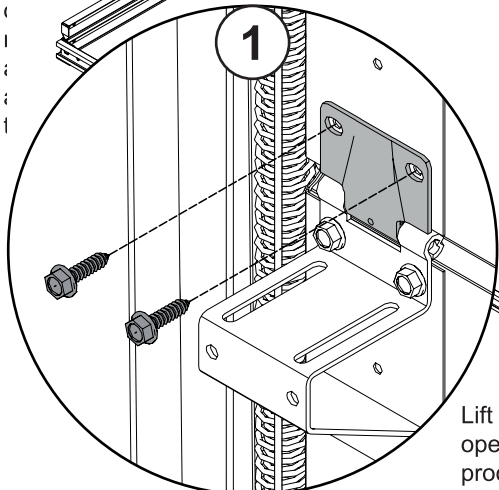



Lift panel into opening and repeat process of attaching brackets and rollers to the third panel

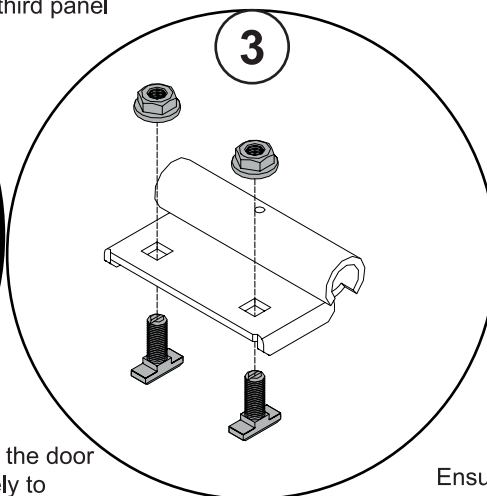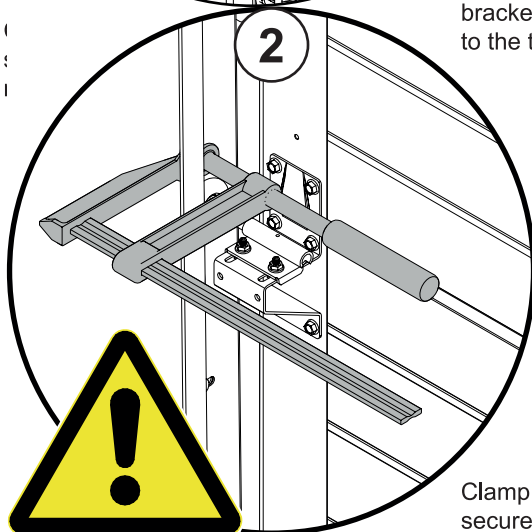


Clamp the door securely to prevent movement

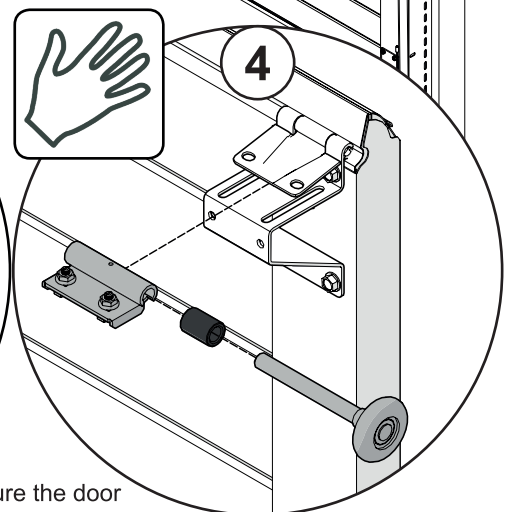





Ensure the door still remains clamped at this point

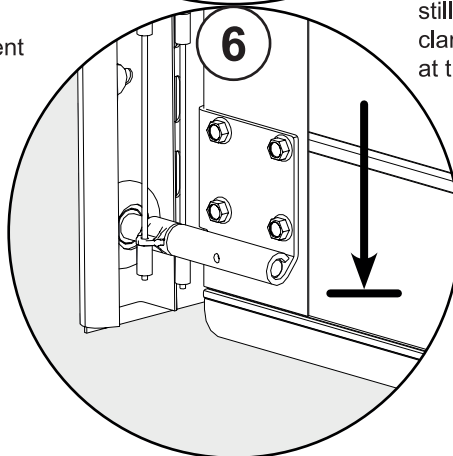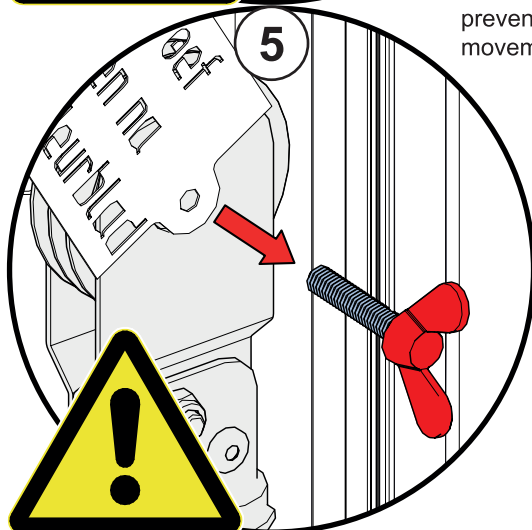





Push door securely onto the ground

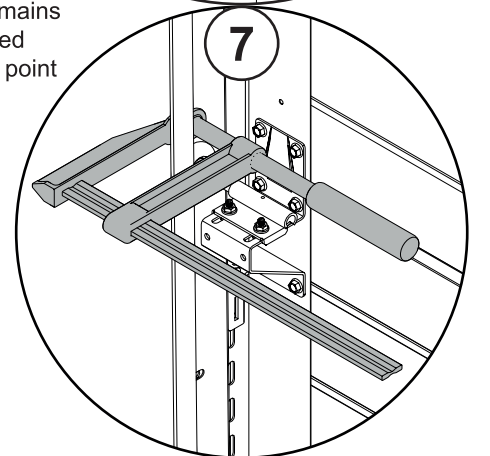


Before removing the red screws, ensure the door is clamped securely. Remove pin




10

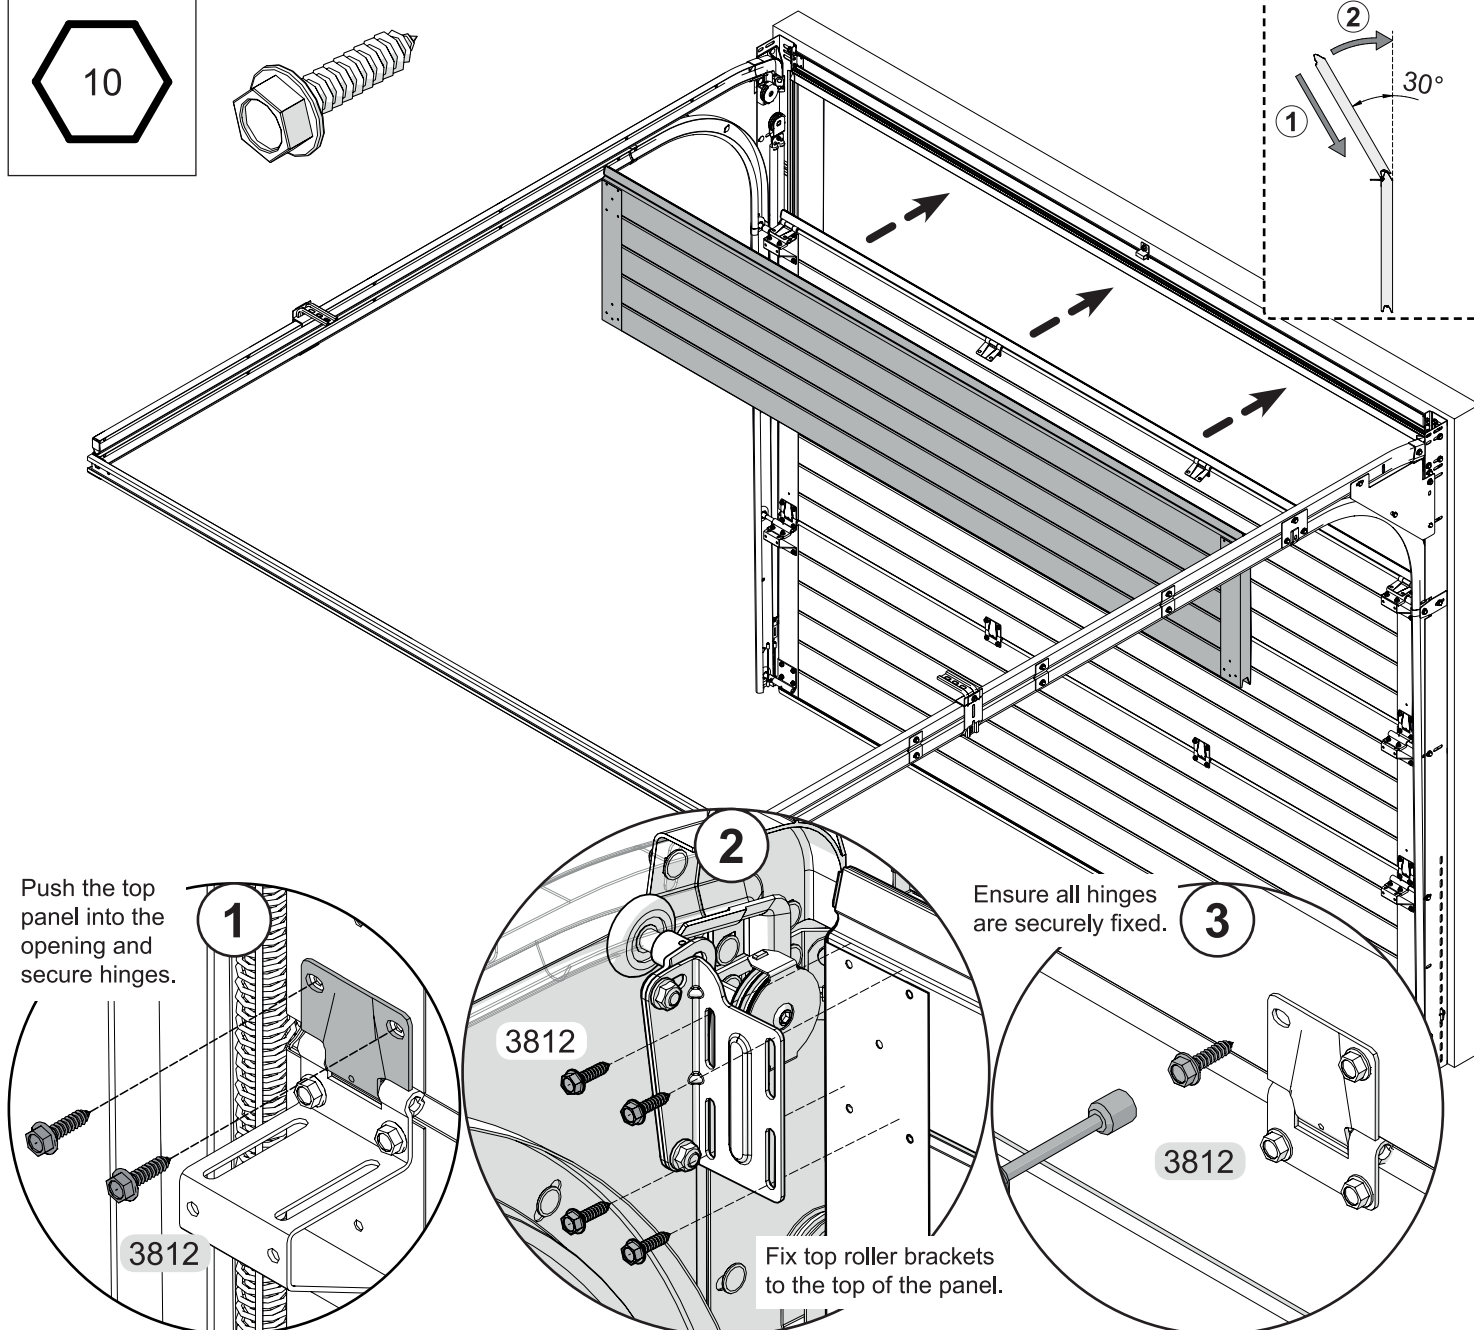



Adjust top roller for manual or electric operation

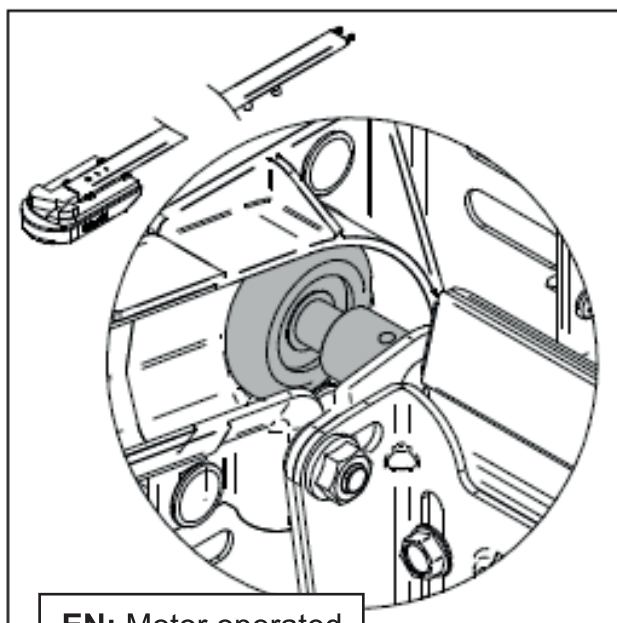


EN: Motor operated

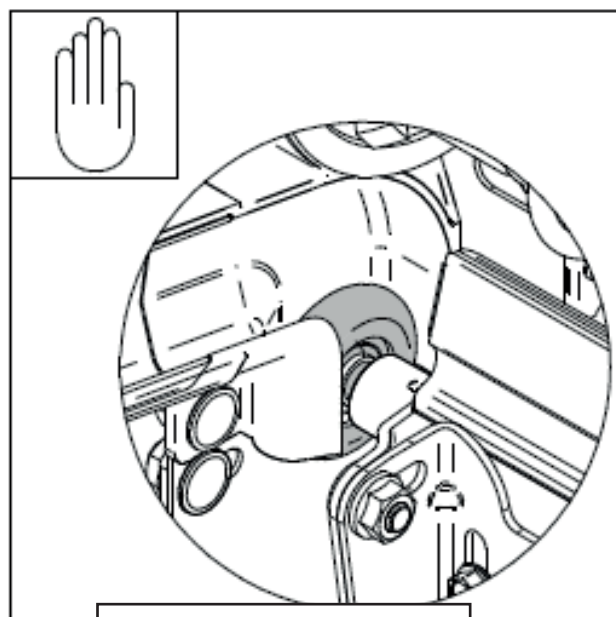


EN: Manually operated

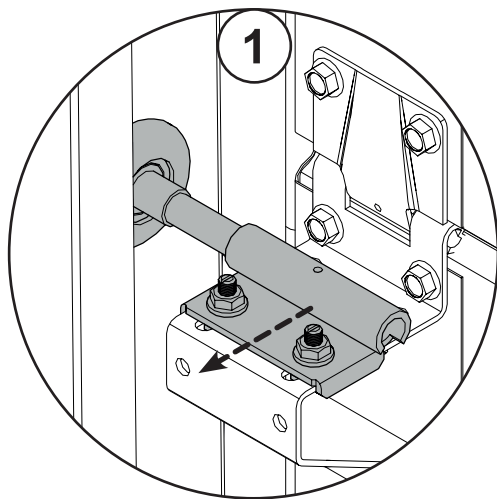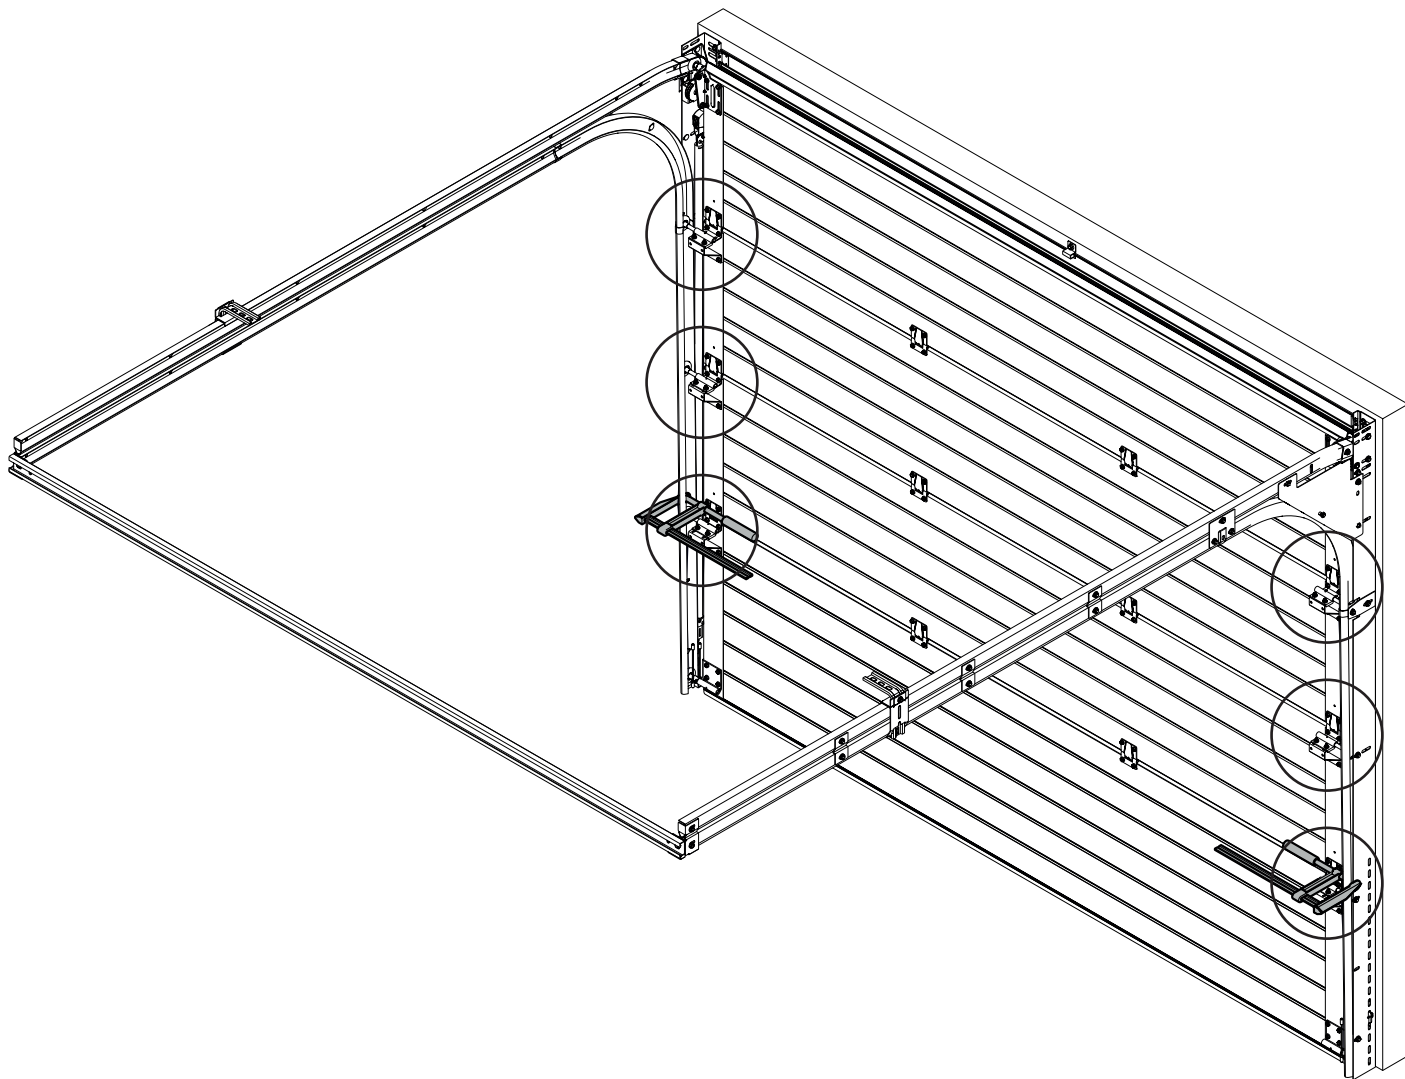


1
Position rollers & brackets so the roller can freely move within the track. Secure bracket when completed.

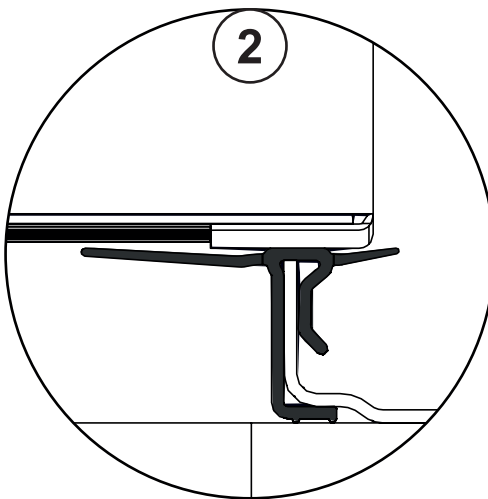

2
Adjust panel to suit the weather seal

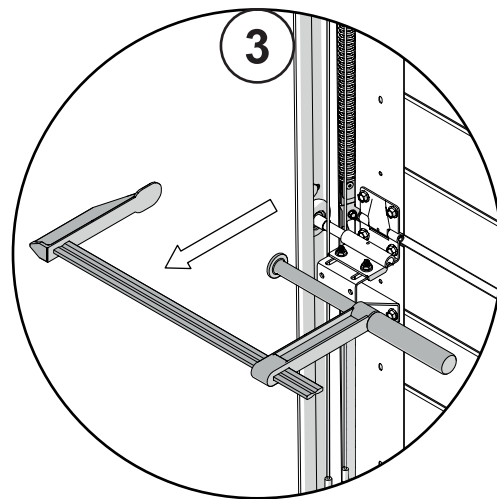


3
Remove clamp




10

Lift door to fully open position


1

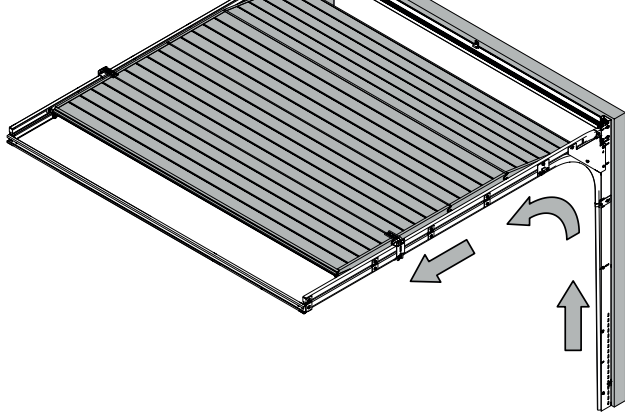


2

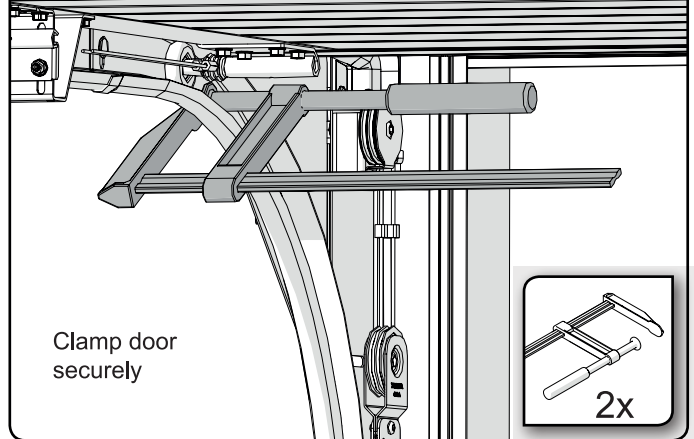


3

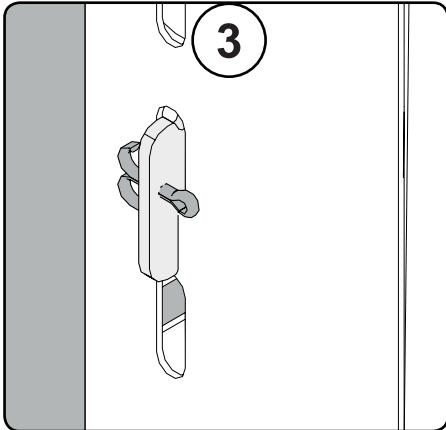


4

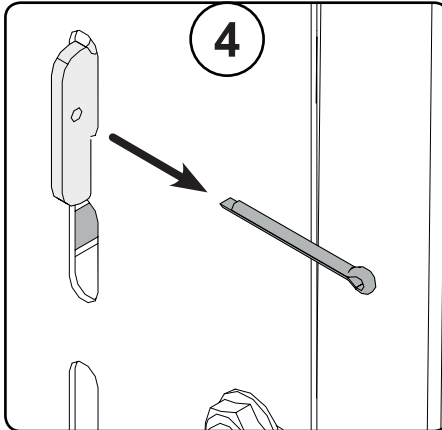

5

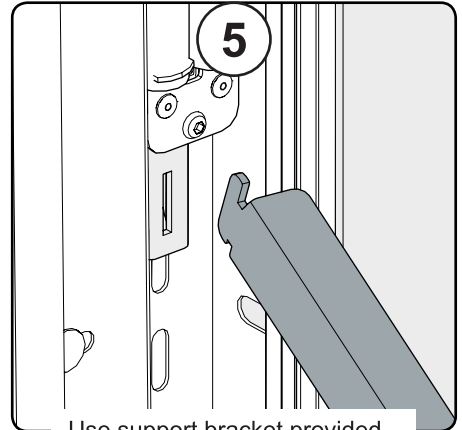


6

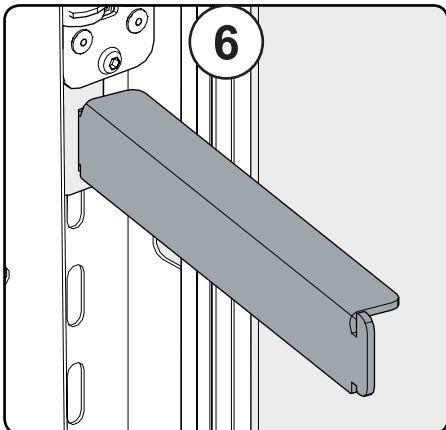

INFO


7

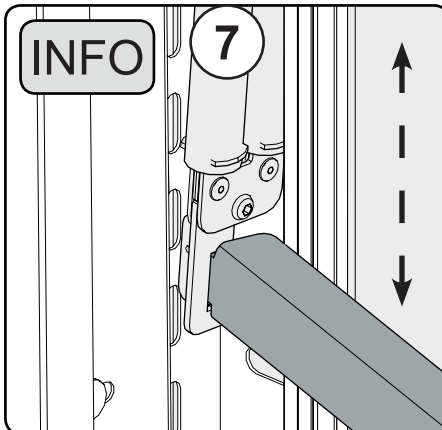

Move spring down or up get the desired tension to balance the door


8

Secure spring with split pin

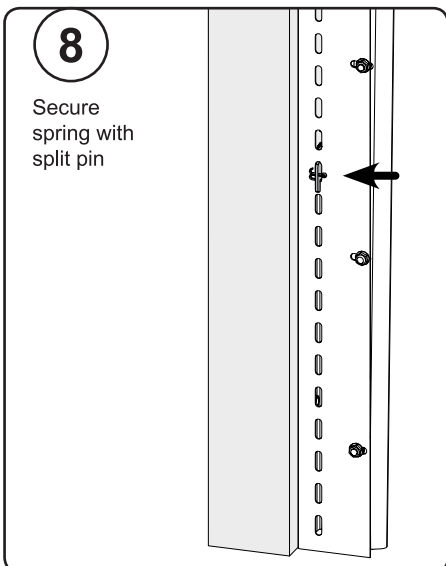


9

Test the door for balance. Readjust tension if necessary.

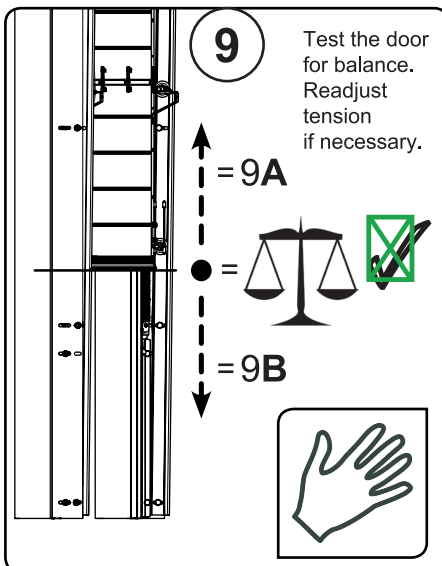


9A




L = R

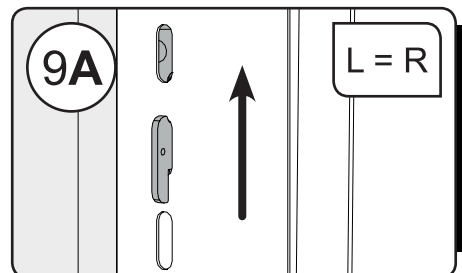

9B



L = R

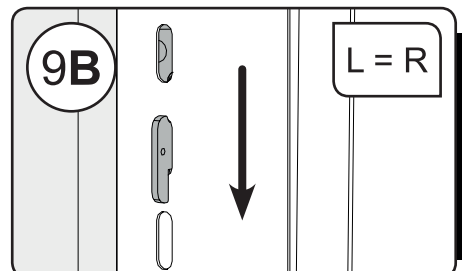

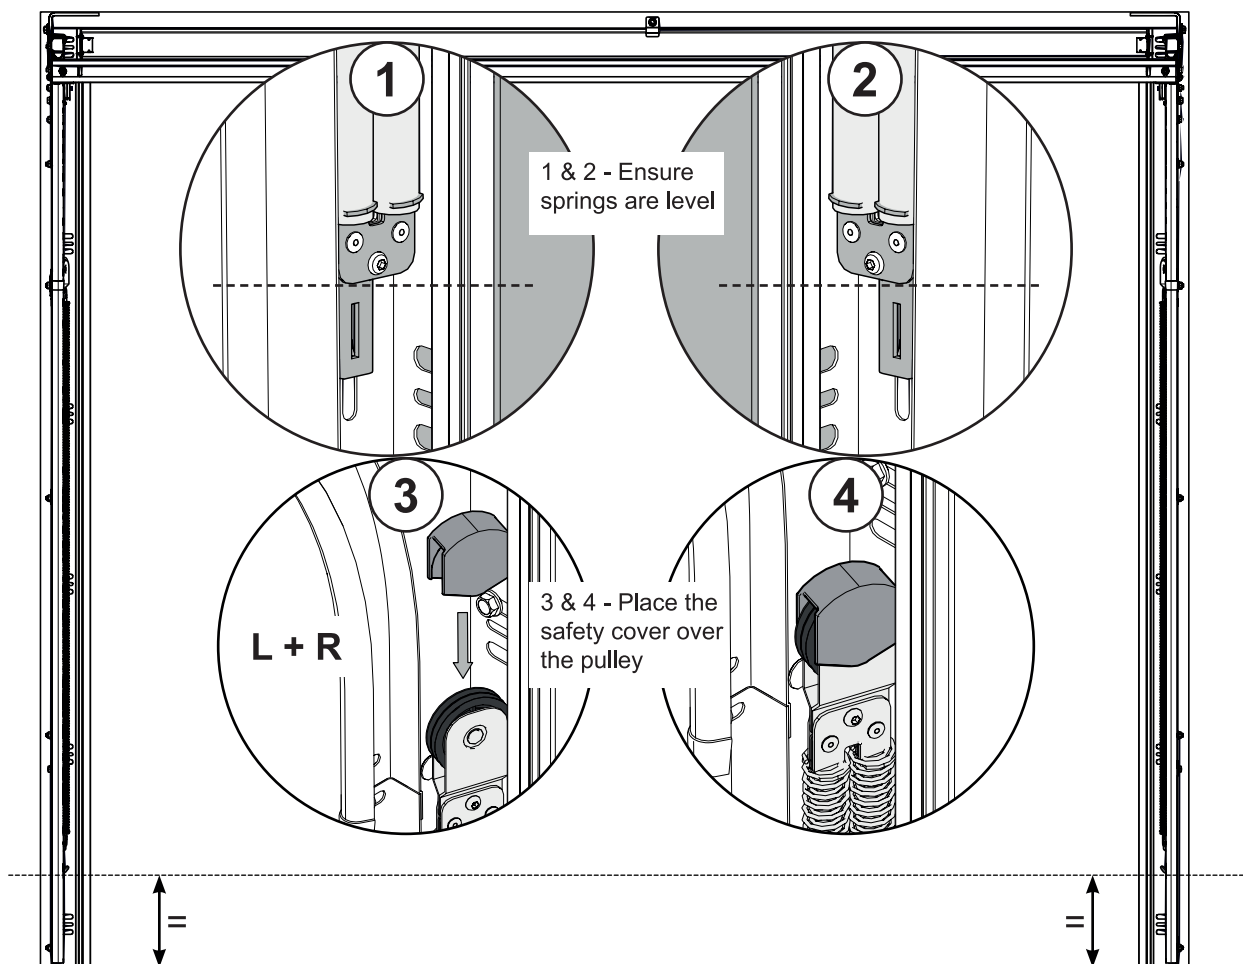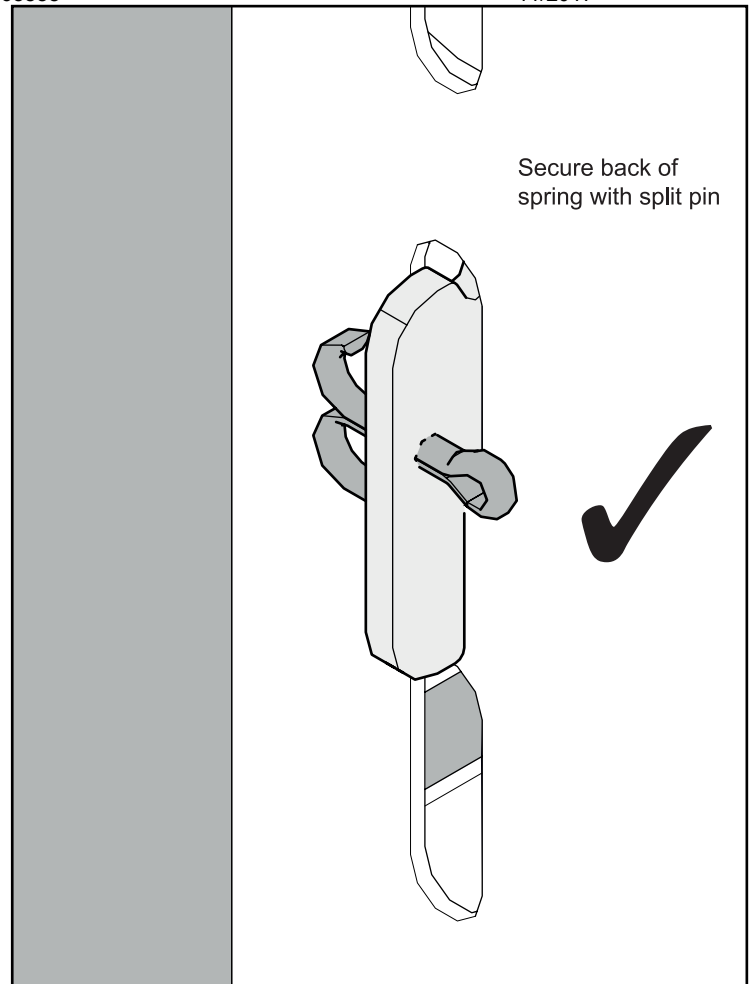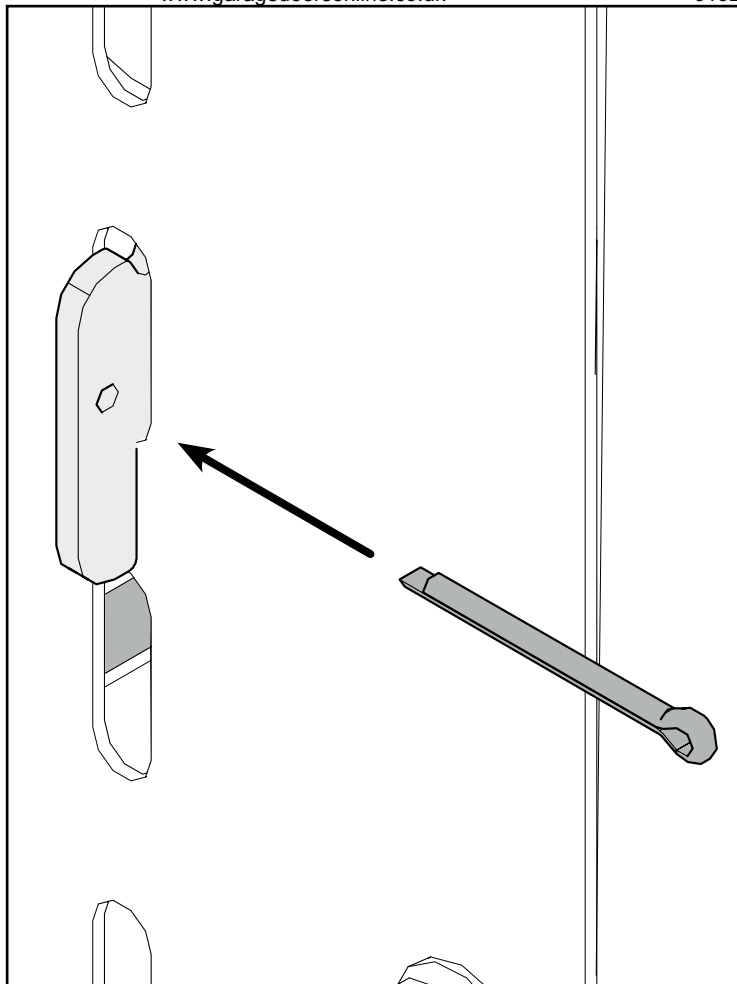

Reveal Options

Executive Framing Kit

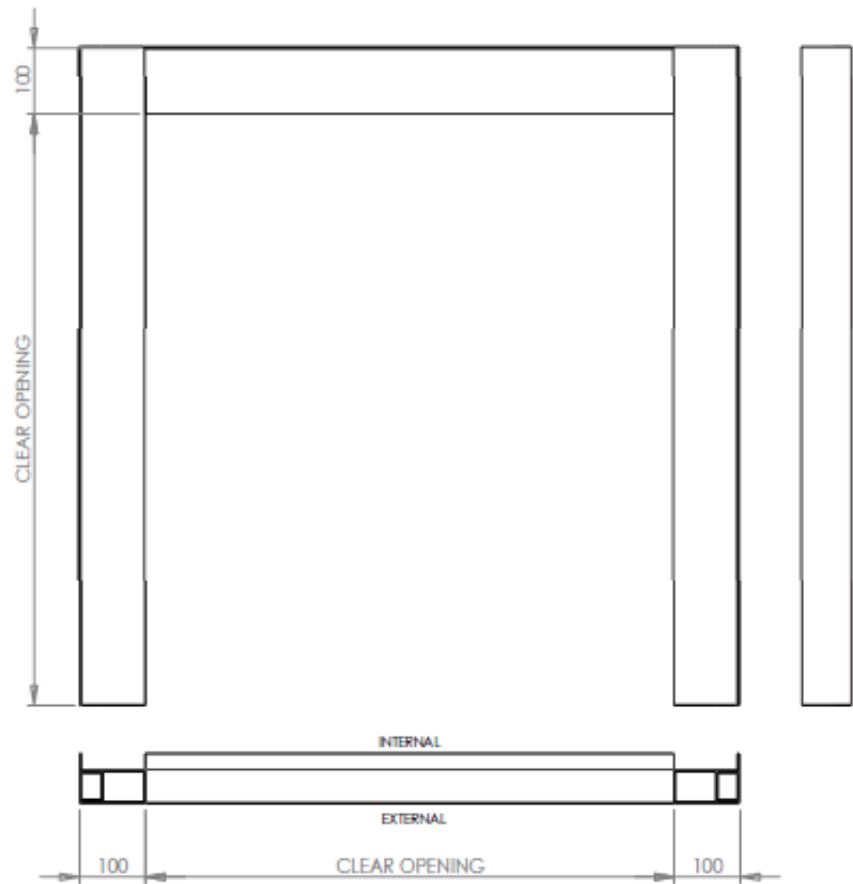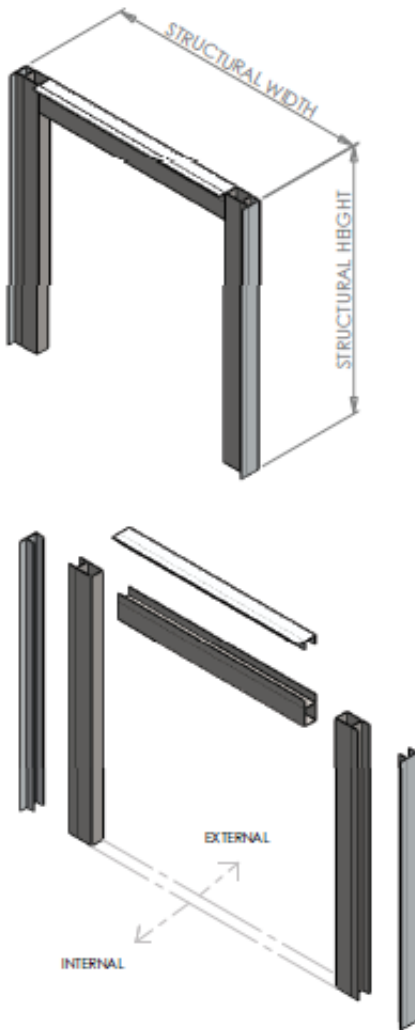

Reveal Brackets

Position 5 per side, secure each bracket with 2 M8 x 18 bolts and M8 serrated nuts

