

TECKENTRUP | HOME

CLASSIC, CONTEMPORARY

Side Hinged Garage Doors
& Side Doors GSW 40-L



TECKENTRUP
DOOR SOLUTIONS

TECKENTRUP | DESIGN

Every detail, perfect



High quality hinges

Aluminium hinges with secured hinge bolts make it extremely difficult to lever open the door and are easily adjusted. Two or three hinges are fitted to each leaf dependent on size.



Standard threshold

The aluminium profile supplied as standard, provides a simple low profile threshold.



Double weather strips and mitred corners

In addition to the circumferential weather strip around the door leaf, the door frame has a three-sided weather strip for excellent draught reduction. Profiles are mitre jointed for a neat finish.



Door stays

These top grade, spring dampened stays hold the door securely in the open position. A simple de-latch motion releases the held door leaf. Any leaf below 780mm wide (including asymmetric side hinged doors) will not have a stay.



Note - not designed for high wind applications.

BUILT TO LAST**Lipped threshold**

For improved weather protection, a stepped aluminium threshold with a bulb weather strip is available as an optional extra. The door leaves close against the raised weather strip creating an improved barrier to dust and debris. The threshold includes a thermal break reducing heat transfer.

**Flush bolt security**

The inactive leaf is secured with flush bolts to the top and bottom of the leaf. The picture also shows the rot proof floor weather strip and the inner rebate.

Stainless steel handles and security locking

High grade stainless steel handles and lock covers are tough and attractive, whilst the latch and dead bolt combination provides dependable security. The inactive leaf incorporates a stainless steel strike plate and steel lock keep box for added attack resistance. If you have a specific hardware requirement, talk to us as alternative designs can often be accommodated.

**Triple point locking option**

The active leaf is available with three point locking for greatly enhanced security. The locks provide enhanced strength to combat attempts to force them apart.



Guarantee: All doors have a 2 year guarantee against mechanical defects and a 10 year guarantee against perforation of the door panel. Terms and conditions apply, visit www.teckentrupdepot.co.uk for details

2/10

2/10 Year Guarantee
SIDE HINGED DOORS

Finished in style

Doors are supplied as standard in traffic white embossed wood grain on the outside (similar to RAL 9016) and grey white embossed stucco on the inside (RAL 9002).


Each profile is available in a selection of finishes as shown

Georgian Profile**WOODGRAIN**

White
Trend/RAL

WOODGRAIN WOOD EFFECT

Night Oak



Rosewood




Golden Oak



Winchester

Standard Ribbed Profile**Centre Ribbed Profile****Solid Profile****WOODGRAIN SMOOTH**

White
Trend/RAL

SMOOTH


White
Trend/RAL

STUCCO

White
Trend/RAL

MICRO PROFILE

White
Trend/RAL

SMOOTH WOOD EFFECT

Night Oak



Rosewood



Golden Oak



Winchester

Trend or RAL?

Trend colours are selected shades that have generally come to be considered as the most popular colours for garage doors. If the colour you require is not available as a Trend colour, we are able to coat our standard panels to a RAL colour.



RAL Colours

Trend Colours

Flame Red RAL 3000	Fir Green RAL 6009	Moss Green RAL 6005	Sepia Brown RAL 8014
Window Grey RAL 7040	Anthracite Grey RAL 7016	White Aluminium RAL 9006	Cream RAL 9001
Quartz Grey RAL 7039	Light Grey RAL 7035	Grey Aluminium RAL 9007	Jet Black RAL 9005
Steel Blue RAL 5011	Umbra Grey RAL 7022	TT 703 A special satin metallic effect - grey with micaeous iron ore particles.	Anthracite Textured RAL 7016
Ice Crystal Grey Aluminium	Please Note: Where doors are exposed to direct sunlight dark colours should be avoided. Colours will be similar to the RAL references stated.		

TECKENTRUP | CHOICE


Superior Quality

Teckentrup side hinged garage doors and personnel doors are quite simply the very best. The solid panels, engineered hollow section aluminium frames and high grade fittings result in a door that closes with a reassuringly deep "clunk".

Security is excellent and the range of styles, finishes and windows allows personalisation to suit your tastes. 1/2 and 1/2 opening and asymmetric configurations further increase versatility.

Solid 40mm thick panels

Doors are built with 40mm thick interlocking panels and an aluminium hollow section frame that provides excellent strength, rigidity and resistance to corrosion.



The mitred door leaf frame and door frame are finished in a matching smooth finish for white, Trend and RAL coloured doors and a complimentary flat colour for Golden Oak (RAL8003), Rosewood (RAL8016), Night Oak (RAL8014) and Winchester (RAL8001) wood design finishes. (The door frame colour shade and surface lustre will show a variance from the panel finish as the base material and coating methods are different.)



Centre Ribbed Horizontal - Woodgrain White



Centre Ribbed Vertical - Woodgrain White



Standard Ribbed Vertical - Woodgrain White



Standard Ribbed Horizontal - Woodgrain White

SUPERIOR QUALITY

SIDE HINGED DOORS



Solid Horizontal - Woodgrain White



Solid Vertical - Woodgrain White



Georgian Vertical - Woodgrain White

**YOU IMAGINE IT
WE MAKE IT!
PANELS, WINDOWS
AND FINISHES
COMBINE TO
CREATE ALMOST
UNLIMITED CHOICE**

**Neat inside too**

The inside of the door is very presentable. There are no unsightly bracings just a wipe clean surface finished in a practical grey white stucco texture (RAL 9002).



Georgian Asymmetric Horizontal - Woodgrain White

TECKENTRUP
DOOR SOLUTIONS

TECKENTRUP | WINDOWS

Make the most of light

Make the most of light

Scratch-resistant, 20mm double glazed, easy-clean windows in attractive designs allow natural light into your garage.

Each style is available with clear, frosted or satin glazing. The window units are fitted with a polyurethane frame that is coloured to match or compliment the panel colour of the door.



Solid Horizontal - Smooth White with Round White Windows



Solid Vertical - Woodgrain White with Square Type 1 Windows



Cross Mullion



Multiple Mullion



Rectangle type 1



Rhombus Mullion



Rectangle type 2**

**Available on standard ribbed, Centre ribbed and solid profile doors only.



Square Type 1



Square Type 2



Square Type 1
Stainless
Also available in
aluminium



Square Type 2
Stainless
Also available in
aluminium



Round Stainless



White polyurethane



Solid Horizontal -
Smooth TT 703 with Round
Stainless Steel Window

Windows

Style	Overall Size (mm)	Colour/Finish
Rectangle 1	610 X 270	White
Rectangle 1	610 X 270	Trend/Ral/Wood design*
Rectangle 2	680 X 210	White
Rectangle 2	680 X 210	Trend/Ral/Wood design*
Square 1 & 2	270 x 270	White
Square 1 & 2	270 x 270	Trend/Ral/Wood design*
Square	230 x 230	Stainless Steel
Square	310 x 310	Stainless Steel
Square	280 x 280	Aluminium
Round	Ø 385	White
Round	Ø 385	Trend/Ral/Wood design*
Round	Ø 242	Stainless Steel
Round	Ø 330	Stainless Steel

* Painted Wood Design windows are finished in a complementary flat colour for Golden Oak (RAL8003), Rosewood (RAL8016), Night Oak (RAL8014) and Winchester (RAL 8001).

Installation dimensions side hinged doors

Performance features EN 13241-1 for Declaration of Performance see
<http://www.teckentrupdepot.co.uk/downloads/pdf/Side%20Hinged-DOP.pdf>

Heat Insulation (DIN EN ISO 12428)	NPD
Air permeability (DIN EN 12426)	NPD
Resistance to wind load (DIN EN 12424)	Class 2
Resistance to water penetration (DIN EN 12425)	NPD
Fire behaviour (DIN EN 4102)	NPD


Teckentrup side hinged doors are manufactured to high standards and it is always our intention to market our products in an honest fashion. The above table is shown to illustrate that we make no performance claims that can be measured against the identified standards. Whilst our door panels have a rigid foam core, the hollow section frame and the attachment of hardware act as a thermal bridge between the inner and outer surface and, as such, we make no claims for insulating properties.






The section height and the height of the handle 'x' depend on the actual door height and construction of the door.

Note: The data is provided as a guide only as variances will occur with panel design.

Installation behind the soffit, only inward opening

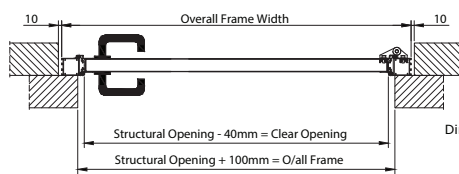


Installation within the soffit, inward or outward opening

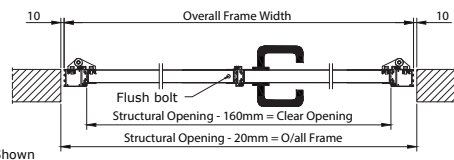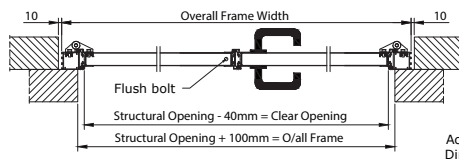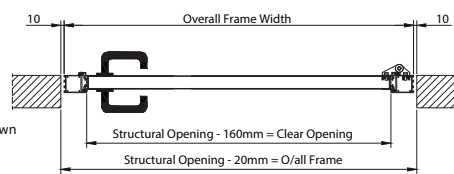


Georgian Doors

Horizontal doors have 2 columns of features as standard arranged 1/2 - 1/2, changing to an asymmetric three columns at the width shown right. 1/2 - 1/2 vertical doors have 2 rows of features as standard changing to three at the height shown right.

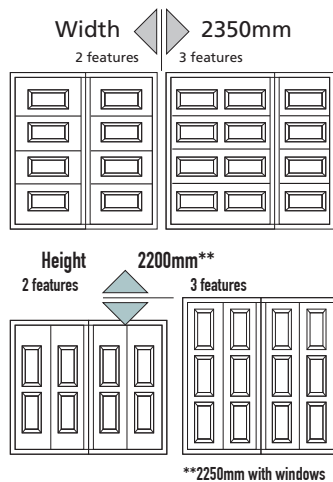

Minimum width Georgian single leaf 850mm, double leaf 1350mm

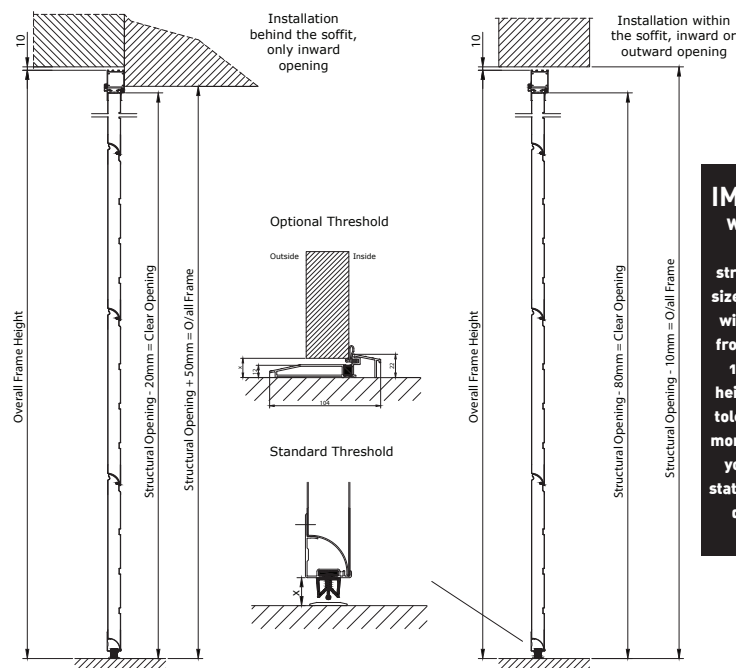

IMPORTANT

When doors are ordered as a structural opening size, Teckentrup UK will deduct 20mm from the width and 10mm from the height for coursing tolerance. If this is more tolerance than you wish, please state the over-frame dimension you require.

Colour The door frame colour shade and surface lustre will show a variance from the panel finish as the base material and coating methods are different. Where differing materials and process are adopted, such as side hinged GSW 40L garage doors, there may be some colour matching variations. Differing light conditions may further reduce or highlight this effect. The colours RAL9006 and 9007 pose particular problems when colour matching, more information is available via the sales office. **Please Note:** Where doors are exposed to direct sunlight dark colours should be avoided. Colours will be similar to the RAL references stated and colours shown in this brochure and are approximations only and limited by the printing process.

TECKENTRUP | HOME

The Complete Solution

Alternative or complimentary

Side Hinged and Sectional Garage Doors

Side hinged doors are an alternative to sectional doors but can also compliment them with matching side access. Getting your lawn mower out of the garage? A side hinged door is perfect and, for ride on mowers, a pair of doors allows drive in access.



Outstanding products, British company

Teckentrup UK

Teckentrup is based in Warrington and manufactures side hinged garage doors, personnel doors, sectional garage doors and steel hinged doorsets. It is part of a global network of companies that manufacture and distribute products from Teckentrup GmbH, based in Germany. Teckentrup UK is a British company, that takes German engineering excellence and adds British know-how to produce a unique range of high quality products!



February 2018. As ours is a policy of progressive design, we reserve the right to alter specification without prior notice. Errors and omissions excepted.

TECKENTRUP
DOOR SOLUTIONS