

DEXXO 1000 RTS**NEW**

Product reference	1216122
EAN Code	/
Pack dimensions (LxHxD)	47x23x27 (cm)
Weight	6,980 (kg)
Pack type	Brown and black box
Minimum order	1
Delivery mode	According to delivery (palette or box)

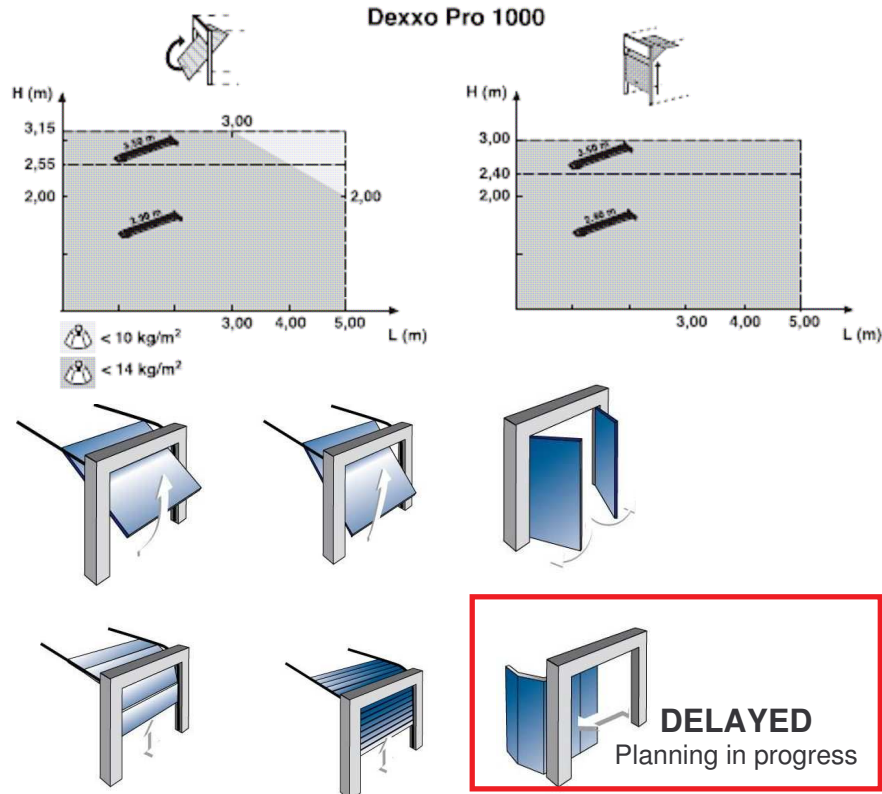
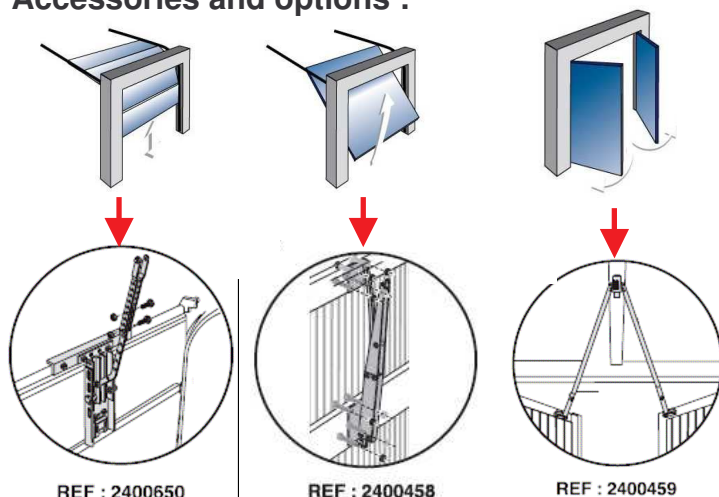
Cancels & replaces	/
Guarantee	5 years
Marketing date	May 2007



MADE IN France
www.somfy.com

Pack content

- 1 motor head with connectors
- 2 customisable remote controls
- 1 lamp 40W
- 1 lintel yoke
- 1 door yoke
- 1 linking arm
- 4 motor's fastening hooks
- 1 bag of accessories
- Installation manuals

**Dexxo Pro 1000****Accessories and options :**

REF : 2400650

REF : 2400458


REF : 2400459


Battery pack	9001001
Antenna	9001002
Orange warning light	9012762
Photo cells	9012763
Standard remote control	1841026
Key switch	1841028
Radio wall switch	1841027
Radio keypad	1841030
Side door security kit	2400657
Door locking kit	2400651
External unlocking device	9012962
External release door	9012961

Rails


Chain rail




2,90m  Ref. : 9013811

3,50m  Ref. : 9013812

36500 cycles


2,90m  Ref. : 9013813

3,50m  Ref. : 9013814

Belt rail



2,90m  Ref. : 9013815

3,50m  Ref. : 9013816

36500 cycles

3,50m  Ref. : 9013817

3,50m  Ref. : 9013818

High performance Rail (chain)



2,90m  Ref. : 9013819

3,50m  Ref. : 9013820

90 000 cycles

TECHNICAL SPECIFICATIONS

Mains supply	230V 50Hz
reduction gear supply	24V DC
Power consumed in standby	5W
Max. power consumed	350W (Excluding remotely controlled lighting)
Traction Force	1000N
Types of rails available	chain - Belt - High performance transmission
Lenghts of rails available	2,9 m : one part or two parts 3,5 m : one part or two parts
Max. door dimensions	9 sp. Meter
Use	20 cycles per day for a standard rail (tested for 36 500 cycles) 50 cycles per day for a high performance rail (tested for 90 000 cycles)
Min. height under the lintel	35 mm
Overall length	With a 2,9 m rail : 3,24 m (3,09 m if the motor head is mounted with a 90° offset) With a 3,5 m rail : 3,74 m (3,59 m if the motor head is mounted with a 90° offset)
Weight	Motor head : 6,98 kg Rail : 5,6 to 10 kg depending on the type of rail
Opening speed	18 cm/s max.
Number of channels that can be stored	32
Somfy radio frequency	433,42 MHz RTS
Built in lighting	230 V / 40 W max. E14 socket
Remotely controlled lighting	230 V / 500 W max. Class 2 ☐
Operating temperature	- 20 °C / + 60 °C (- 4 °F / + 140 °F)
Assigned duty time	60 s.
Electrical insulation	Class 2 - Double insulation ☐

This product complies with the "safety, specific rules for powering vertically opening garage doors in residential use" requirements (standard EN 60335-2.95). When installed in line with the instructions and in compliance with the "Installation check list", the product will be compliant with standards EN 13241-1 and EN 12453.

SOMFY hereby declares that the device is compliant with the essential demands and other relevant requirements of directive 1999/5/CE.

A declaration of compliance is available from the web site at www.somfy.com/CE (Dexxo Pro).