

## Thermo65/Thermo46 entrance doors

NEW: Finger-scan elegantly integrated in the door leaf







www.garagedoorsonline.co.uk
023
The last of the la
TILL WAR
ELL THE CONTROL OF TH
7777
< < < < < < < < < < < < < < < < < < <
2 7

6	Good	reasons	to	try	Hormann

- 10 Programme overview
- 12 Thermo65
- 22 Thermo46
- 30 Security equipment
- 32 Automatic locks, glazings
- 34 Handles, embellishments
- 36 Colours and surface finishes
- 40 Dimensions and fitting data
- 42 Hörmann product range

The colours and surface finishes shown are subject to the limitations of the printing process and cannot be regarded as binding.

Some of the products and equipment details described and illustrated in this catalogue are not standard, but available for a surcharge depending on the equipment option. Please contact your Hörmann Partner with reference to the current price list for specific door equipment.

Descriptions and pictures, information about the scope of delivery, equipment and colour correspond to the time of printing. Subject to changes and errors.

All rights reserved. No part may be reproduced without our prior permission.

## There's no place like home

What's better than coming home after a long day at work and enjoying family life? You can eat, play board games and watch TV together. To be able to enjoy time with your loved ones, you have to feel safe and at ease in your own four walls.

Hörmann Thermo65 and Thermo46 entrance doors will help you with that. Our high-quality construction components feature excellent thermal insulation values, reliable security equipment, a large selection of styles and an attractive price-performance ratio. You are sure to find a Hörmann door that meets your demands on the following pages.





### GOOD REASONS TO TRY HÖRMANN

## "A good reputation must be earned."

August Hörmann


In keeping with the tradition started by the company's founder, the name Hörmann delivers brand name quality with extensive product expertise. The family business has over 80 years of experience as a construction component specialist and sees itself as your partner from the very beginning of building and renovation projects. It's no surprise that Hörmann is one of Europe's most successful entrance door providers. All this makes Hörmann entrance doors a reassuring purchase.



## Quality products from Germany

The entrance door construction is developed and manufactured by Hörmann. Our highly qualified employees work intensively on new products, continual further developments and improvements to details. The results are patents and unique products on the market. Endurance tests under real conditions ensure mature series products with Hörmann quality.



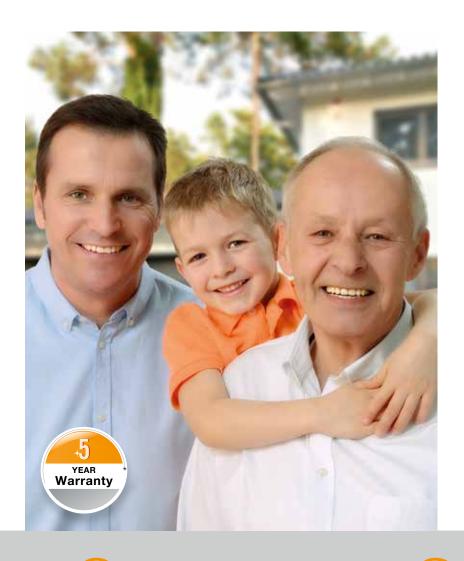



## Entrance doors for generations

We are convinced of our products and our uncompromising quality assurance. This is why Hörmann issues a 5-year guarantee\* on all Thermo65 / Thermo46 entrance doors.

## An eye on the future

is why the company obtains 100 % of its required energy from green sources.

Together with an intelligent and certified energy management system, CO<sub>2</sub>-neutral mailing and the recycling of valuable materials, more than 40000 tons of CO<sub>2</sub> are saved each year.

And last but not least, Hörmann also offers

Hörmann is setting a good example. That

products for sustainable construction.

<sup>\*</sup> The complete warranty conditions can be found at: www.hoermann.com

### GOOD REASONS TO TRY HÖRMANN



## Door leaf without visible leaf profile

## High thermal insulation

Thermo65 and Thermo46 doors make for an exquisite and elegant reception – whether you use them for a main or a side entrance.

The shapely door leaf with its solid interior and exterior and the leaf profile on the inside fulfils the highest design requirements.

The interior view (shown on page 30) harmonises perfectly with your residential internal doors.

With U<sub>D</sub>-values up to approx. 1.1 W/(m<sup>2</sup>·K)\*, Thermo46 entrance doors provide excellent thermal insulation for your home. Thermo65 entrance doors feature a U<sub>D</sub>-value of up to approx. 0.87 W/(m<sup>2</sup>·K)\* for even better thermal insulation. As a result, you save energy in the long term while also protecting the environment.



External view of entrance doors from other manufacturers with visible leaf profile



Interior view of entrance doors from other manufacturers with visible leaf profile and glazing beads





## Break-in-resistant locking

For you and your family, being able to rest easy in your own home is important. This is why our Thermo65/Thermo46 doors are equipped with multiple-point locking as standard.

For even more security, many Thermo46 door styles as well as many Thermo65 entrance doors (including with side elements and transom lights) are optionally available with break-in-resistant RC 2 security equipment.



Our entrance doors' certified break-in resistance is also recommended by police information centres.

## Safe glazing



As standard with 8 mm laminated safety glass on the interior and exterior

When it comes to industrial safety and burglar protection, Hörmann entrance doors fulfil the absolute highest demands. The laminated safety glass on the interior and exterior of the triple-pane insulated glazing provides maximum security. In case of glass breakage, the glass splinters are also bound to the inside, virtually eliminating any danger of being injured by the shards. Furthermore, the laminated safety glass offers better protection against burglars as it makes reaching through more difficult.

### PROGRAMME OVERVIEW

## Steel / aluminium entrance door Thermo65

Thanks to the solid door view from the inside, the high-quality Thermo65 doors perfectly match the timber internal doors of your home. You can enjoy the same door view of doors made of different materials for many years to come.

#### Construction

- Solid, 65-mm-thick steel door leaf with leaf profile on the inside and thick rebate for an elegant door appearance
- Leaf profile made of composite material with thermal break for high stability and thermal insulation
- 80-mm aluminium frame with thermal break and 20-mm-high aluminium/plastic threshold rail with thermal break ensures excellent thermal insulation
- Triple sealing offers optimal protection from rain, wind and dirt
- Triple-pane insulated glazing with safety glass on both sides virtually eliminates all risk of injury in the event of breakage
- Optional RC 2 security equipment for extra security\*\*

Fulfils all requirements of the energy savings regulation

Suitable for fitting without thermal bridges

U<sub>D</sub>-value up to approx. 0.87 W/(m<sup>2</sup>⋅K)\*



\* Approved by ift Rosenheim Door size RAM 1230 × 2180 mm \*\*Not THP 410S, 430E, 600S



## Steel / aluminium entrance door Thermo46

All Thermo46 doors are delivered with a solid door leaf to give your entrance doors and residential internal doors a uniform view from the inside.

#### Construction

- Solid, 46-mm-thick steel door leaf with leaf profile on the inside and thick rebate for an elegant door appearance
- Leaf profile made of composite material with thermal break for good stability and thermal insulation
- 60-mm aluminium frame with thermal break and 20-mm-high aluminium / plastic threshold rail with thermal break ensures good thermal insulation
- Double sealing offers good protection from rain, wind and dirt
- Double-pane insulated glazing with safety glass on both sides virtually eliminates all risk of injury in the event of breakage
- Optional RC 2 security equipment for extra security\*\*

Fulfils all requirements of the energy savings regulation

Suitable for fitting without thermal bridges

U<sub>D</sub>-value up to approx. 1.1 W/(m<sup>2</sup>·K)\*



\* Approved by ift Rosenheim Door size RAM 1230 × 2180 mm \*\*Not for TPS 020S, 025S, 030S, 040S, 200I, 400I









## The entrance door that makes you feel welcome

The Thermo65 offers you everything that makes for an excellent entrance door. The solid 65-mm-thick steel door leaf with PU rigid foam infill and the leaf profile on the inside made of composite material as well as the aluminium frame with thermal break keep the cold out. With a  $U_D$ -value up of up approx. 0.87 W/(m<sup>2</sup>·K), Thermo65 doors feature good thermal insulation. As standard, the doors are equipped with a 5-point security lock, allowing you to feel safe and secure in your home. Most Thermo65 styles are optionally available with RC 2 safety equipment to make you feel even more secure in your own four walls.

Choose your favourite of 14 attractive styles and customise it with one of our 17 preferred colours and 5 Decograin decors.

## Distinctive design that reflects your personal style



**Style 010**Decograin Golden Oak, stainless steel handle HB 14-2, side elements with Satinato glazing



Style 015
Decograin Titan Metallic
CH 703 with embellishment
view 400 in stainless steel
look, stainless steel handle
HB 14-2



Style 015 Standard colour Traffic white RAL 9016, stainless steel handle HB 14-2



Style 515
Standard colour Traffic white
RAL 9016, silk matt,
stainless steel handle
HB 14-2



Style 010
Preferred colour Grey
aluminium RAL 9007,
stainless steel
embellishment view 751,
stainless steel handle
HB 14-2



Style 600S

Decograin Winchester Oak, stainless steel handle
HB 38-2, with surface-mounted Satinato glazing,
side elements with Satinato glazing

## THERMO65



▲ Thermo65 style 515 in Decograin Titan Metallic CH 703, with side elements

▼ Thermo65 style 010 in Decograin Titan Metallic CH 703, opening outwards (optional), with side elements








► Thermo65 style 820S in Decograin Dark Oak, with side elements

## Visible design

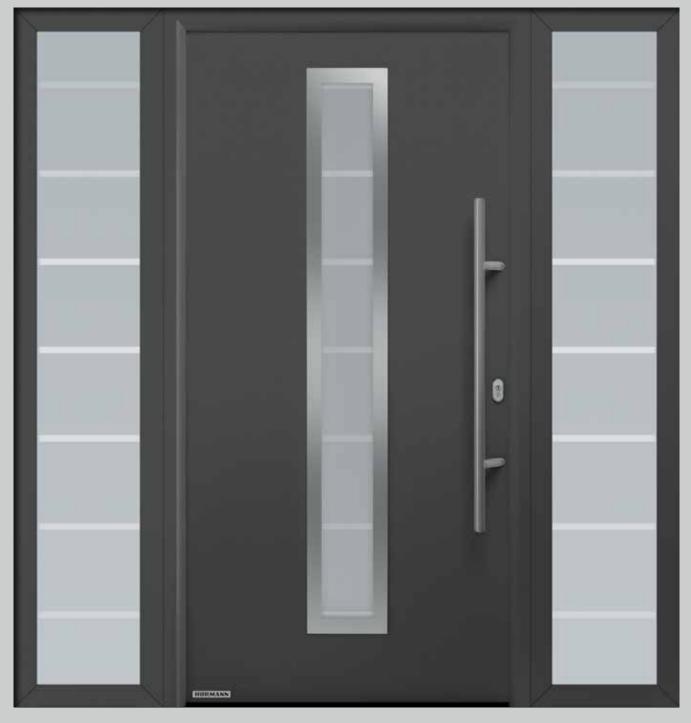

## Style 700B

Preferred colour Decograin Titan Metallic CH 703, stainless steel handle HB 38-2, sand-blasted glazing with 7 clear stripes



Style 750C
Preferred colour Purple red
RAL 3004, silk matt,
stainless steel handle
HB 38-2, sand-blasted
glazing with 5 clear stripes



Style 800S
Preferred colour Window
grey RAL 7040, silk matt,
stainless steel handle
HB 38-2, Satinato glazing



Style 810E
Standard colour Traffic
white RAL 9016, silk matt,
stainless steel handle
HB 38-2, sand-blasted
glazing with clear stripes
(square)



Style 850B
Standard colour Traffic white
RAL 9016, silk matt,
stainless steel handle
HB 38-2, sand-blasted
glazing with 7 clear stripes



Style 900D
Standard colour Traffic white
RAL 9016, silk matt,
stainless steel handle
HB 38-2, sand-blasted
glazing with 4 clear stripes



Style 820S ■ NEW
Decograin Dark Oak,
stainless steel handle
HB 38-2, Satinato glazing

## THERMO65





Style 100

Standard colour Traffic white RAL 9016, silk matt, stainless steel handle HB 14-2, side elements with Satinato glazing



Style 410S

Standard colour Traffic white RAL 9016, silk matt, stainless steel handle HB 14-2, Satinato glazing



Style 430E

Standard colour Traffic white RAL 9016, silk matt, stainless steel handle HB 14-2, glazing with clear stripes (frame)







## Turn your entrance into an eye-catcher

The Thermo46 doors offer you everything that makes for an excellent entrance door. With a U<sub>D</sub>-value up to approx. 1.1 W/(m²·K), the Thermo46 doors achieve excellent thermal insulation values. Thanks to the standard 5-point security lock, the entrance doors are well equipped when it comes to security. Some styles are optionally available with RC 2 security equipment to make you feel even more secure in your own four walls.

Choose your favourite from 13 door styles – from modern to classic. You can customise your Hörmann door with colours, glazings, side elements and transom lights according to your preferences.

## For everyone who values elegance



#### Style 750C

Standard colour Traffic white RAL 9016, silk matt, stainless steel handle HB 38-2, sand-blasted glazing with 5 clear stripes, side elements with sand-blasted glazing without stripes



Style 700B

Decograin Titan Metallic CH 703, stainless steel handle HB 38-2, sand-blasted glazing with 7 clear stripes, side elements with sand-blasted glazing without stripes



Style 900D

Decograin Golden Oak, stainless steel handle HB 38-2, sand-blasted glazing with 4 clear stripes



Style 515

Decograin Titan Metallic CH 703 with embellishment view 400 in stainless steel look, stainless steel handle HB 14-2



Style 015

Standard colour Traffic white RAL 9016, silk matt, stainless steel handle HB 14-2



Style 025S

Standard colour Traffic white RAL 9016, silk matt, with embellishment view 400 in stainless steel look, stainless steel handle HB 14-2, Satinato glazing

## THERMO46





Style 010
Preferred colour Anthracite grey RAL 7016, stainless steel handle HB 14-2, side elements with Satinato glazing



Style 020S Standard colour Traffic white RAL 9016, silk matt, stainless steel handle HB 14-2, Satinato glazing



Style 030S Preferred colour Window grey RAL 7040, stainless steel handle HB 14-2, Satinato glazing



Standard colour Traffic white RAL 9016, silk matt, stainless steel handle HB 14-2, round glazing Ø 280 mm, Satinato glazing

## THERMO46





Style 100

Standard colour Traffic white RAL 9016, silk matt, stainless steel handle HB 14-2, side elements with Cathedral glass



Style 200


Standard colour Traffic white RAL 9016, silk matt, stainless steel handle HB 14-2, Cathedral glass



Style 400I

Standard colour Traffic white RAL 9016, silk matt, stainless steel handle HB 14-2, Cathedral glass


### SECURITY EQUIPMENT

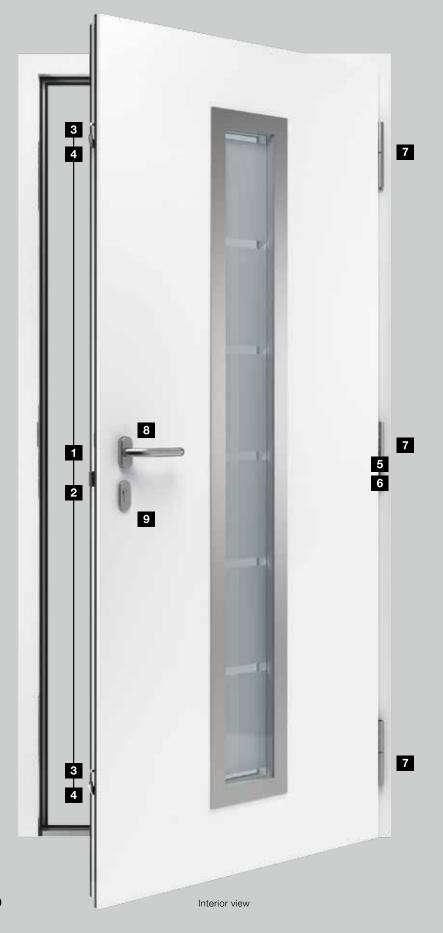

## Reassuring security

## 5-point security lock

You will feel safe at home: 2 conical swing bolts 4 engage with 2 additional security bolts 3 and 1 lock bolt 2 in the frame's lock plate and pull the door tightly shut. The lock plate on Thermo65 doors is adjustable for an optimal door setting. Thanks to the soft-lock latch 1, the door closes very quietly.

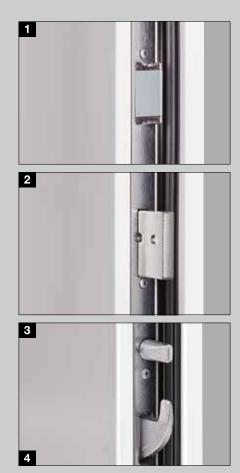

## Securing the hinge side

Being able to rest easy in your own home is important, which is why your Thermo46/Thermo65 door is secured additionally on the hinge side, making it practically impossible to force the door open.

#### 5 Thermo46

With 3 security bolts

#### 6 Thermo65

With continuous security strip made of aluminium

## Perfectly hung with 3-way adjustable guide rollers

Sturdy, two-part 3-way adjustable hinges with safety pins and stainless steel decorative covers guarantee smooth door function.

### 8 Interior lever

Each door comes with a beautifully shaped stainless steel interior lever as standard.

#### Exterior rose escutcheon

Thermo65 and Thermo46 doors come with a stainless steel exterior rose escutcheon as standard.
The security sliding rose escutcheon for Thermo65 doors makes it more difficult to manipulate the locking cylinder, making it ideally equipped in terms of security.

### 10 Profile cylinder

Delivered with 5 keys as standard. With emergency and hazard function, i.e. the door lock can still be operated when the key is inserted on the inside.

### Frame variants







The 60 mm or 80 mm aluminium frame with thermal break and PU foam infill is available in either a round-style 11 (A 1 / A 3) or rectangular profile 12 (A 2 / A 4), without a surcharge.













### AUTOMATIC LOCKS, GLAZINGS

## Custom equipment

## Automatic lock with mechanical self-locking

(for Thermo65)

When the door falls shut, the bolts automatically extend and securely lock the entrance door.

## Automatic lock with electric motor and opening via BiSecur radio (for Thermo65)

Open your entrance door easily and conveniently via multiple-point locking using a hand transmitter or radio finger-scan. There's no longer any danger of forgetting your keys. Your entrance door automatically unlocks via an electric motor.

You can then push the door open.

- 1 Hand transmitter HSE 4 BS black textured surface with black plastic caps
- 2 Radio finger-scan FFL 12 BS

## in the door leaf ■ NEW (for Thermo65)

Open your entrance door with your fingerprint! The finger-scan is elegantly integrated in the door leaf and is available for all steel / aluminium Thermo65 entrance doors equipped with an automatic lock with electric motor.

## Automatic lock with electric motor and opening via Bluetooth NEW

(for Thermo65)

Opening and closing your door via Bluetooth using your smartphone is even more convenient. Lock and unlock your steel / aluminium Thermo65 entrance doors with optional automatic lock via Bluetooth opening using the user-friendly Hörmann BlueSecur app.

**Electric strike** (for Thermo65 and Thermo46, not shown)

With the electric strike catch, you can conveniently open your door via a switch inside the house.

Reed contact (for Thermo65 and Thermo46) and bolt switch contact (for Thermo65, not shown)

For connection to the building technology or alarm system and evaluation that the door is closed (reed contact) or locked (bolt switch contact).

**Door drip** (for Thermo65 and Thermo46, not shown)

Attractive protection: The door drip in Traffic white RAL 9016 or in a stainless steel look diverts driving rain and is easy to retrofit.

## Retractable bottom seal (for Thermo65 and Thermo46, not shown)

This optional equipment is the best solution for sealing entrance doors without threshold rail used for barrier-free entrances.









### Glazings for doors



Thermo65 with triple-pane glazing Style 700/750/800/ 810/820/850/900

## Thermo46 with triple-pane glazing Style 700/750/900

These styles offer a nearly flush-fitting view on the inside and outside.
The stainless steel glazing frame complements the elegant overall appearance. Insulated glazing is convincing when it comes to saving energy thanks to high thermal insulation values.



Thermo46 with doublepane glazing Style 020/025/030/040

These doors are equipped with insulated glazing, guaranteeing excellent thermal insulation.

A modern, harmonious overall door appearance is created with a roundstyle plastic glazing frame. With Decograin surfaces, the glazing frame is painted in a colour complementing the surface finish.



Thermo65 with triple-pane glazing Style 410 / 430

## Thermo46 with double-pane Cathedral glazing Style 200 / 400

Panelled door styles are a stylish way to present your home with their perfectly matching profile-style plastic glazing frames. When it comes to thermal insulation, insulated glazing gives you everything you could want from a high-quality Hörmann entrance door.



Thermo65 with triple-pane glazing Style 600

The black contrast frame gives the surface-mounted glazing an elegant appearance. Insulated glazing also ensures high thermal insulation, as you would expect in a modern entrance door.

### Glazings for side elements and transom lights

Thermo46 doors are supplied with side elements and transom lights with double-pane insulated glazing, Thermo65 doors with triple-pane insulated glazing.



Satinato



Sand-blasted / sand-blasted with clear stripes



Clear glass




Cathedral small hammered finish (only Thermo46)

### HANDLES, EMBELLISHMENTS


# A beautiful handle accents the door: select your desired handle

As standard, all doors come with the exterior handles shown in the product photos (from page 14). Alternatively, you can select a different handle made of stainless steel.

## Exterior handles

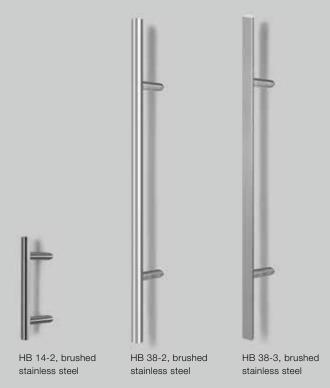


### Lever handle sets for outside and inside

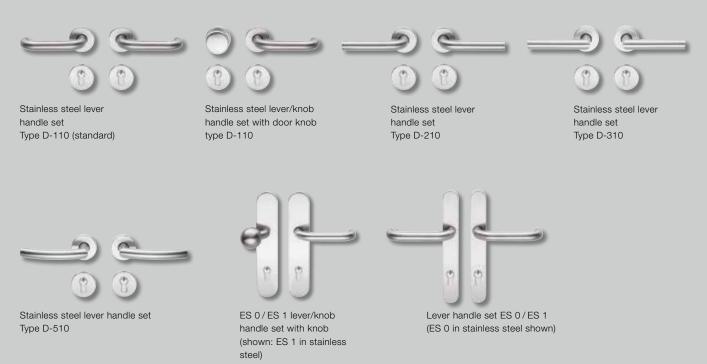

## Embellishments make your entrance look more beautiful

Design the exterior of styles 010, 015, 025 and 515 using these attractive embellishments. The embellishments made of stainless steel or in a stainless steel look are available for Thermo65 and Thermo46 door versions and for all door colours or decors.

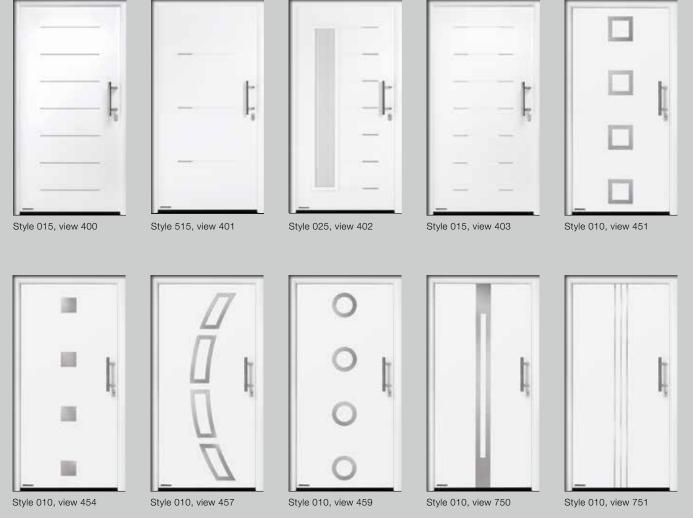


### COLOURS AND SURFACE FINISHES

## Find your favourite colour

Do you prefer a subtle Window grey or would you like to show your true colours with Ruby red? When choosing a colour for your new Hörmann entrance door, we let your creativity run wild. You can choose between the particularly inexpensive Traffic white RAL 9016 and 17 additional preferred colours\*. The interior and exterior of your Thermo65 or Thermo46 doors are always the same colour. Simply contact your Hörmann partner.

## In low-cost Traffic white as standard

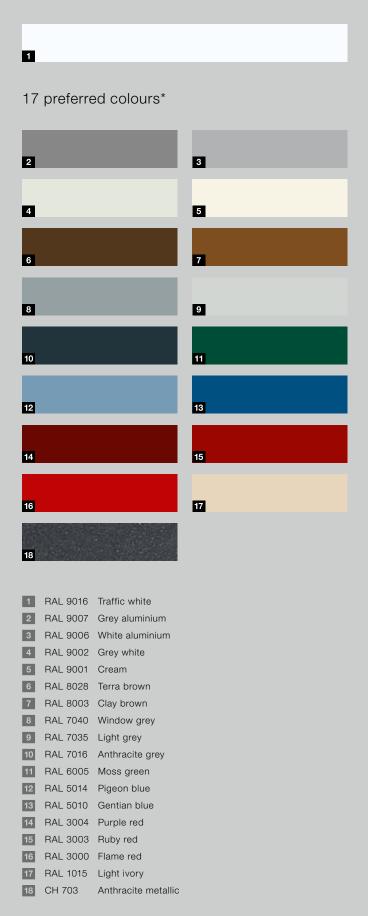

## Elegance and detailed accuracy

Decograin\*\* is available in four natural-looking timber designs and one anthracite design with a metallic effect. An embossed wood grain gives it an authentic timber character.

## 5 Decograin decors\*\*



- Golden Oak: medium brown, golden yellow oak design
- 2 Dark Oak: walnut-coloured oak decor
- 3 Night Oak: dark, intense oak design
- 4 Winchester Oak: natural-coloured knotty oak design
- 5 Titan Metallic CH 703: Anthracite with a metallic effect

#### Please note:

The colours and surface finishes shown are subject to the limitations of the printing process and cannot be regarded as binding. Dark colours should not be used for doors that are exposed to the sun, as an increased material expansion may impair the door's function.

<sup>\*</sup> Available for Thermo65 styles 410, 430 from 01.07.2019.

<sup>\*\*</sup>Not available for Thermo65 styles 100, 410, 430 and Thermo46 styles 100, 200, 400. Glazing frames in matching colours for Thermo46 styles 020, 025, 030, 040.

### COLOURS AND SURFACE FINISHES

## Customise your entrance area

For entrance doors Thermo65 and Thermo46, you can order the door leaf and frame in different colours to fit your own individual taste. Combine the standard colour Traffic white RAL 9016, 17 preferred colours or 5 Decograin decors to perfectly match your home and decorating style.

## Door leaf and frame in different colours



Frame in White aluminium RAL 9006, door leaf in Grey aluminium RAL 9007



Frame in Titan Metallic CH 703, door leaf in Traffic white RAL 9016



Frame in White aluminium RAL 9006, door leaf in Titan Metallic CH 703



Frame in Anthracite grey RAL 7016, door leaf in Purple red RAL 3004

## Entrance doors matching internal doors

Design your Thermo65 entrance door in Decograin Golden Oak, Dark Oak or Titan Metallic CH 703 on the inside to match your white internal doors. All door styles are available with rounded frames, as well as the side elements, in the Decograin decors listed, on the inside in Traffic white RAL 9016 – on request with side elements in the same colour combination. This way, you can enjoy your perfectly matching entrance door and internal doors.

### Two-colour entrance doors and side elements



Viewed from outside in Decograin surface



Viewed from inside in Traffic white RAL 9016\*

#### Please note:

The colours and surface finishes shown are subject to the limitations of the printing process and cannot be regarded as binding. Dark colours should not be used for doors that are exposed to the sun, as an increased material expansion may impair the door's function.

 $<sup>^{\</sup>star}$  Not available for Thermo65 styles 100, 410, 430 and all Thermo46 styles.

## SIZES AND FITTING DATA

## Standard sizes Thermo65

Overall frame dimension (ordering size)	Structural opening	Clear frame dimension
1000 × 2100	1020 × 2110	850 × 2005
1100 × 2100	1120 × 2110	950 × 2005


## Standard sizes Thermo46


Overall frame dimension (ordering size)	Structural opening	Clear frame dimension
1000 × 2100	1020 × 2110	872 × 2016
1100 × 2100	1120 × 2110	972 × 2016

## Special sizes Thermo65 / Thermo46


Styles	Overall frame dimension (ordering size)
200	875 – 1100 × 1990 – 2186
010, 020, 030, 040, 600, 700, 750, 800, 810	700 – 1250 × 1875 – 2250
015, 025, 515	875 – 1250 × 1875 – 2250
100, 400, 410, 430	875 – 1100 × 1875 – 2186
820, 850, 900	800 – 1250 × 1875 – 2250

## Thermo65






25




Extension profile 25 mm

Extension profile 50 mm


### Horizontal view of door

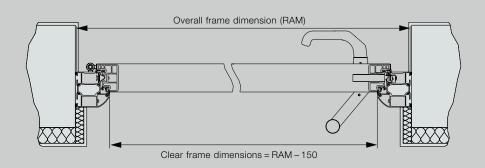

## Horizontal view of side element

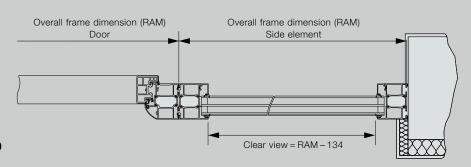

### Vertical view of door

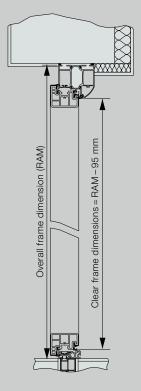

## Side element standard sizes Thermo65 / Thermo46

Version	Overall frame dimension (ordering size)
Thermo 65 / 46	400 × 2100

## Transom light special sizes Thermo65 / Thermo46

Version	Overall frame dimension (ordering size)
Thermo 65 / 46	700 – 2250 × 300 – 500


## Side element special sizes Thermo65 / Thermo46


Versions	Overall frame dimension (ordering size)
Thermo46	300 - 1000* × 700 - 2250
Thermo65	300 - 1000* × 700 - 2250


<sup>\*</sup>Transom light not possible from a width of 500 mm. Door sets with side elements do not contribute to the static equilibrium, which must be guaranteed by the building structure.


### Thermo46

### Frame variants











Extension profile 25 mm

Extension profile 50 mm

### Horizontal view of door

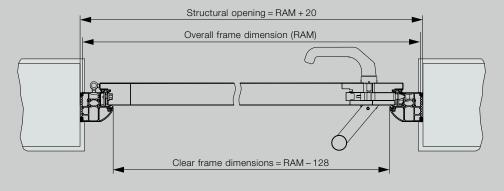

### Horizontal view of side element

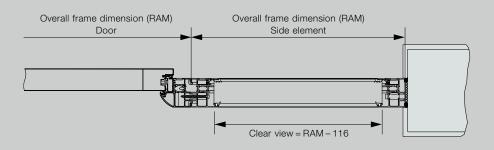

### Vertical view of door

