


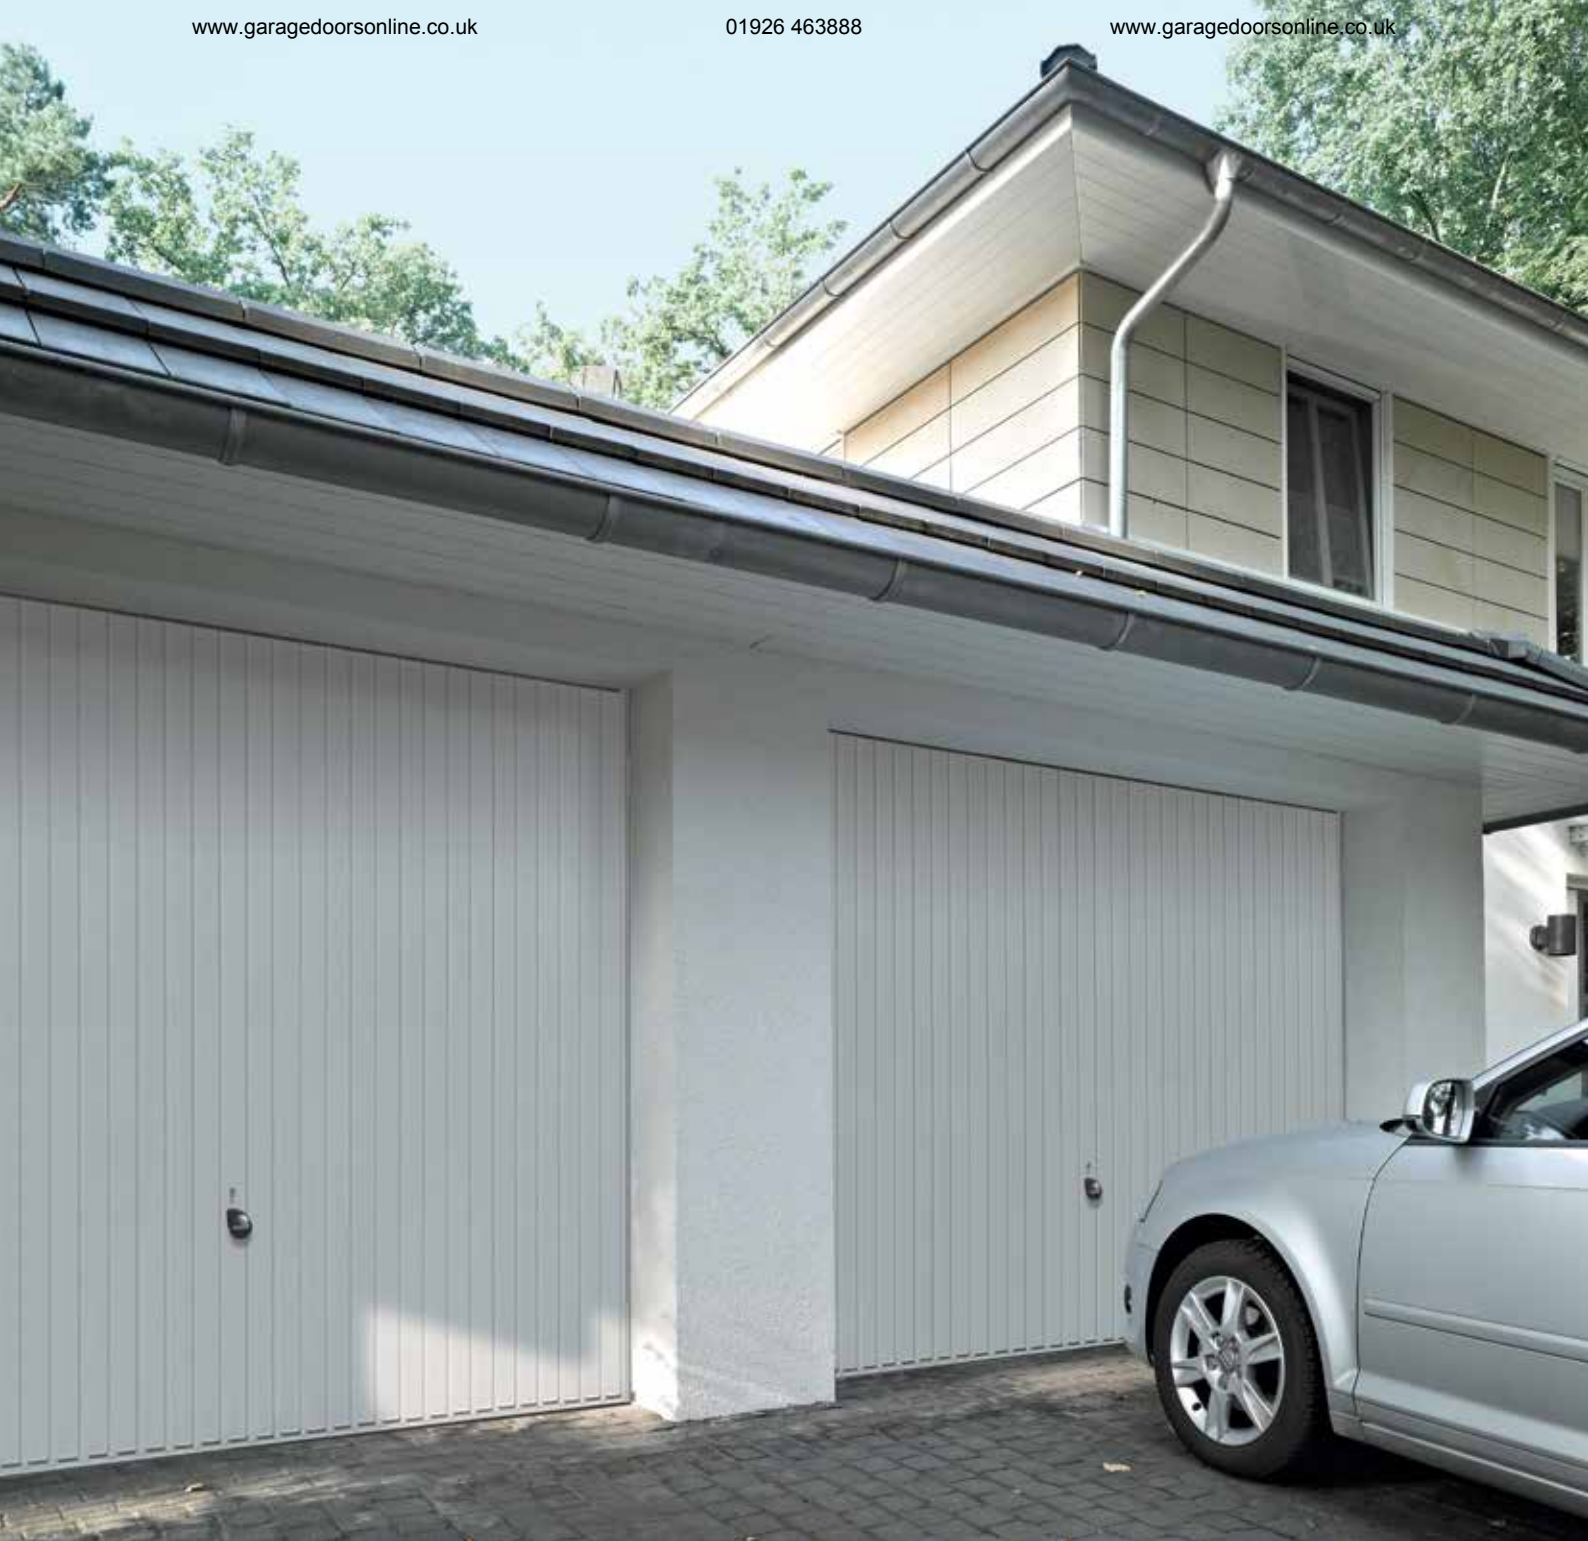

Up-And-Over Garage Doors

Europe's best-selling garage door

HÖRMANN

STYLE 905 FOR ON-SITE DESIGN



Exclusive door aesthetics

With style 905, you can create a garage front to fit your own ideas and personal architectural style. A steel frame construction for on-site infill is a solid technical basis to build on. You can pick an infill to fit your individual style. This way you can incorporate your garage door harmoniously into the overall look of your home's facade.

Styles 902 and 905 also come with a practical wicket door that provides you with good access to everything in the garage, without the need to open the entire door.

◀ Style 905 with on-site infill

◀ Style 902 Window grey RAL 7040 with wicket door

▼ Style 914 Traffic white RAL 9016



Colours to choose

Steel doors with coloured polyester primer powder-coating. The galvanized door leaves are optimally protected against adverse effects of the weather and corrosion right up to the cut edges. Our steel styles are available in inexpensive Traffic white as standard, in 7 equally-priced preferred colours, as well as about 200 colours based on RAL.



Collective garage doors

Up-and-over doors are also suitable for the secure locking of parking spaces in collective garages. The ventilation slots (approx. 30% of the door surface) ensure optimal ventilation.

OVERVIEW AND TECHNOLOGY

Steel doors

Style	902	905	914
Traffic white RAL 9016, 7 preferred colours, RAL to choose	•		•
Wicket door and side door available	•	•	
Ideal for underground and collective garages			•
Max. width (mm)	3250 (5000*)	3000 (5000*)	3000
Max. height (mm)	2750	2500	2750

* As up-and-over garage door N500 style 405 or 402, further information can be found in the double and collective garage doors brochure

**1 Protection against trapping**

Flexible plastic rails between the door leaf and frame (no steel on steel), as well as additional protective caps over the lever arms, ensure effective protection against trapping.

Hörmann patent

**2 Multiple spring safety system**

If one of the springs breaks, the other intact springs support the door. The distance between the spring windings is so minimal that even children's fingers are protected from getting caught.

**3 Comfortable closing**

Due to the specially shaped lever arm the door pulls itself shut when closing.

**4 Break-in-resistant due to a unique rotary catch lock**


With this type of lock, the door leaf corners are fixed firmly to the frame, making forced opening practically impossible. You can additionally equip the door with top locking using an easy-to-fit retrofit kit.

Hörmann patent

DIMENSIONS AND FITTING DATA

Size range N 80

Door height (BRH)	2750						
	2625						
	2500						
	2375						
	2250						
	2125						
	2000						
	1875						
		2000	2250	2500	2625	3000	3250
		Door width (BRB)					

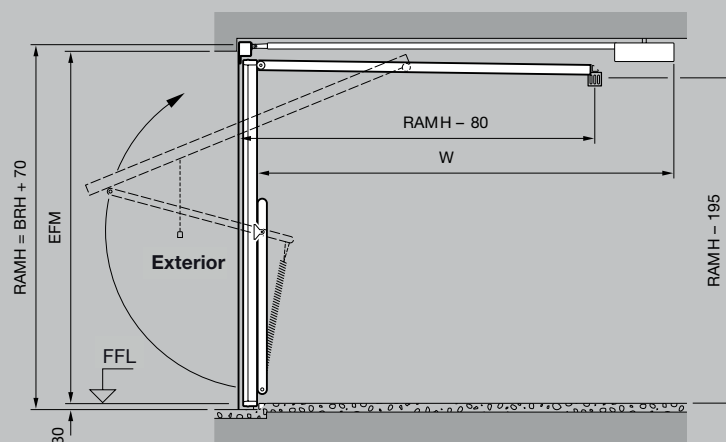


Standard sizes N 80 for single garages *

Ordering sizes		Overall frame dimension		Clear passage dimension**		Fitting behind the opening			Fitting in the opening		
BRB	BRH	RAMB	RAMH	LDB	LDH	EFM width (EBB)	x	EFM height (EBH)	EFM width	x	EFM height
2250	1920	2355	1990	2110	1800	2250 (2215 - 2340)	x	1920 (1890 - 1950)	2375	x	1970
	2000	2355	2070	2110	1880	2250 (2215 - 2340)	x	2000 (1970 - 2030)	2375	x	2050
	2075	2355	2145	2110	1955	2250 (2215 - 2340)	x	2075 (2045 - 2105)	2375	x	2125
	2125	2355	2195	2110	2005	2250 (2215 - 2340)	x	2125 (2095 - 2155)	2375	x	2175
2375	1920	2480	1990	2235	1800	2375 (2340 - 2465)	x	1920 (1890 - 1950)	2500	x	1970
	2000	2480	2070	2235	1880	2375 (2340 - 2465)	x	2000 (1970 - 2030)	2500	x	2050
	2075	2480	2145	2235	1955	2375 (2340 - 2465)	x	2075 (2045 - 2105)	2500	x	2125
	2125	2480	2195	2235	2005	2375 (2340 - 2465)	x	2125 (2095 - 2155)	2500	x	2175
	2250	2480	2320	2235	2130	2375 (2340 - 2465)	x	2250 (2220 - 2280)	2500	x	2300
	2375	2480	2445	2235	2255	2375 (2340 - 2465)	x	2375 (2345 - 2405)	2500	x	2425
2500	1920	2605	1990	2360	1800	2500 (2465 - 2590)	x	1920 (1890 - 1950)	2625	x	1970
	2000	2605	2070	2360	1880	2500 (2465 - 2590)	x	2000 (1970 - 2030)	2625	x	2050
	2075	2605	2145	2360	1955	2500 (2465 - 2590)	x	2075 (2045 - 2105)	2625	x	2125
	2125	2605	2195	2360	2005	2500 (2465 - 2590)	x	2125 (2095 - 2155)	2625	x	2175
	2250	2605	2320	2360	2130	2500 (2465 - 2590)	x	2250 (2220 - 2280)	2625	x	2300
	2375	2605	2445	2360	2255	2500 (2465 - 2590)	x	2375 (2345 - 2405)	2625	x	2425
	2500	2605	2570	2360	2380	2500 (2465 - 2590)	x	2500 (2470 - 2530)	2625	x	2550
2625	2750	2605	2820	2360	2630	2500 (2465 - 2590)	x	2750 (2720 - 2780)	2625	x	2800
	2125	2730	2195	2485	2005	2625 (2590 - 2715)	x	2125 (2095 - 2155)	2750	x	2175
2750	2000	2855	2070	2610	1880	2750 (2715 - 2840)	x	2000 (1970 - 2030)	2875	x	2050
	2125	2855	2195	2610	2005	2750 (2715 - 2840)	x	2125 (2095 - 2155)	2875	x	2175
3000	2000	3105	2070	2860	1880	3000 (2965 - 3090)	x	2000 (1970 - 2030)	3125	x	2050
	2125	3105	2195	2860	2005	3000 (2965 - 3090)	x	2125 (2095 - 2155)	3125	x	2175


You can find up-and-over garage doors N500 up to 5000 mm width and additional door styles in the double and collective garage doors brochure

Door type N 80 for single garages


Horizontal view Fitting behind the opening

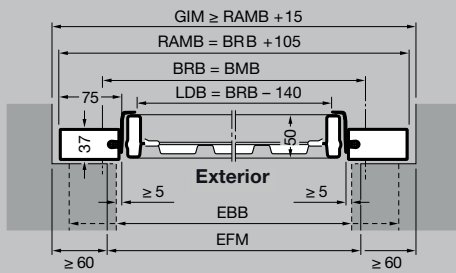


Vertical view door with threshold

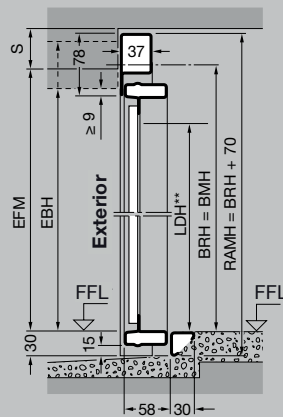


Vertical view door without threshold

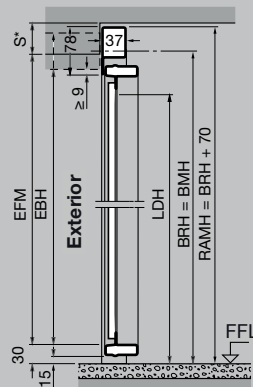


Horizontal view fitting in the opening

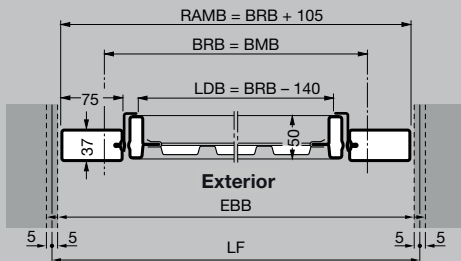

Vertical view door with threshold

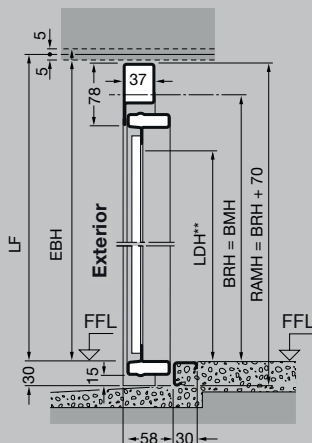

Vertical view door without threshold

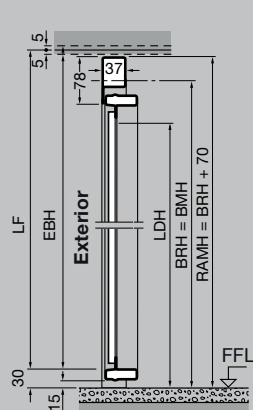

Dimensions in mm

Explanations

BMB	Ordering size width
BMH	Ordering size height
BRB	Nominal size width
BRH	Nominal size height
RAMB	Overall frame dimension width
RAMH	Overall frame dimension height
LDB	Clear passage width
LDH	Clear passage height
GIM	Inside garage dimension
EFM	Recommended structural dimension
LF	Structural opening
FM	Structural dimension
EBB	Fitting area width
EBH	Fitting area height
FFL	Finished floor level
W	Overall length of operator ProMatic / SupraMatic
S	Required headroom
	With steel infill ≥ 50 mm
	Style 905, 941 ≥ 65 mm
	with timber infill ≥ 65 mm

Doors with modernisation panels

The structural width may be reduced by max. 10 mm. The structural height may be reduced by max. 10 mm if fitting with a threshold. Add 30 mm to the structural dimension for doors with uninterrupted flat floor lines (frame from FFL).

Please note:

* Depending on the door style


** Clear passage dimension for doors with threshold

DIMENSIONS AND FITTING DATA

Standard sizes F80 for pre-fabricated garages*


Ordering sizes		Overall frame dimension		Clear passage dimension**		Structural opening* (fitting area)		
BRB	BRH	RAMB	RAMH	LDB	LDH	Width	×	Height
2325	1905	2459	2008	2185	1785	2399-2439	×	1948-1968
2350	1935	2484	2038	2210	1815	2424-2464	×	1978-1998
2375	2045	2509	2148	2235	1925	2449-2489	×	2088-2108
2375	2075	2509	2178	2235	1955	2449-2489	×	2118-2138
2425	2075	2559	2178	2285	1955	2499-2539	×	2118-2138
2455	1905	2589	2008	2315	1785	2529-2569	×	1948-1968
2480	1935	2614	2038	2340	1815	2554-2594	×	1978-1998
2485	2045	2619	2148	2345	1925	2559-2599	×	2088-2108
2500	2075	2634	2178	2360	1955	2574-2614	×	2118-2138
2500	2100	2634	2203	2360	1980	2574-2614	×	2143-2163
2560	2125	2694	2228	2420	2005	2634-2674	×	2168-2188
2570	2125	2704	2228	2430	2005	2644-2684	×	2168-2138
2590	2075	2724	2178	2450	1955	2664-2704	×	2118-2138
2590	2125	2724	2228	2450	2005	2664-2704	×	2168-2188
2705	2125	2839	2228	2565	2005	2779-2819	×	2168-2188
2715	2075	2849	2178	2575	1955	2789-2829	×	2118-2138
2720	2200	2854	2303	2580	2080	2794-2834	×	2243-2263
2730	2125	2864	2228	2590	2005	2804-2844	×	2168-2188

Arrangement of anchors

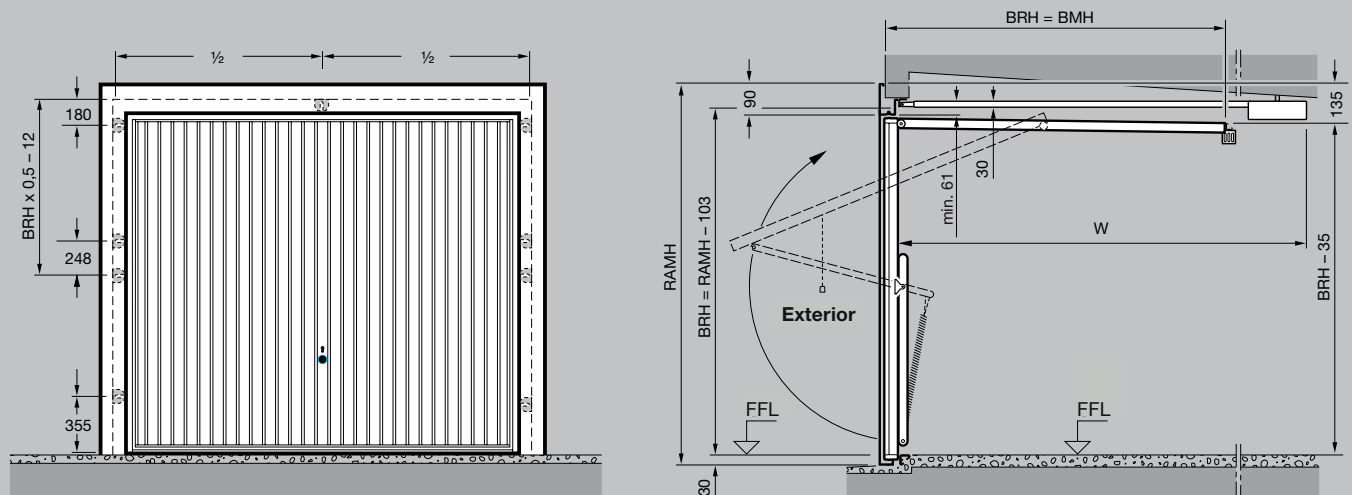


Plug-and-screw fitting

(min. 75 mm reveal depth)

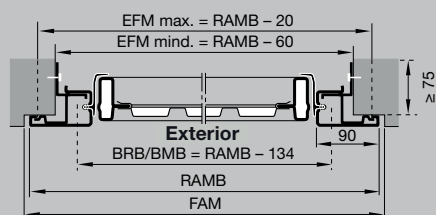


Clamp fitting


(min. 50 mm, max. 100 mm reveal depth)

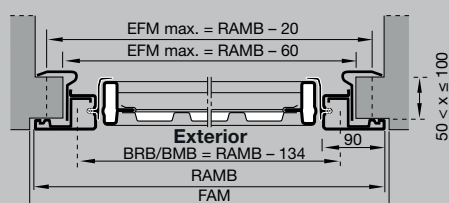


Plug-and-screw fitting with threshold

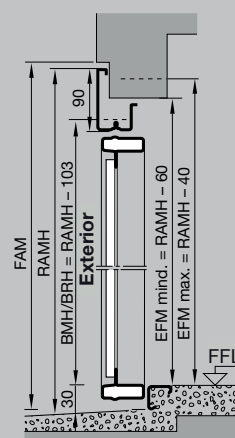

Plug-and-screw fitting without threshold

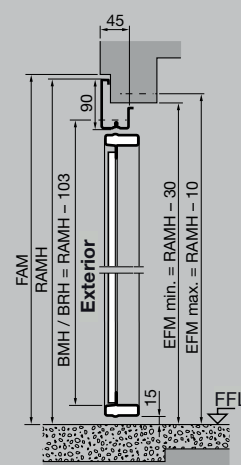


Clamp fitting without threshold

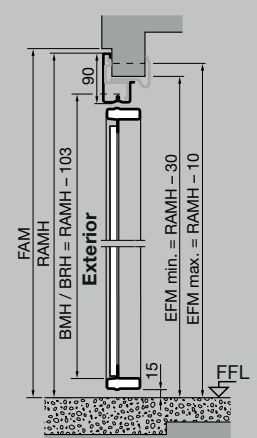


Side door, single-leaf, with corner frame

Vertical view door without threshold

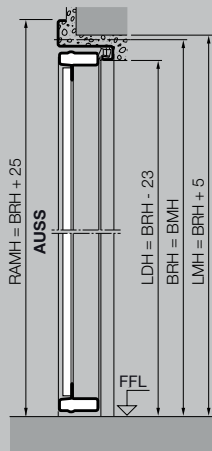


Horizontal view




Side door double-leaf, with corner frame

Vertical view door with threshold

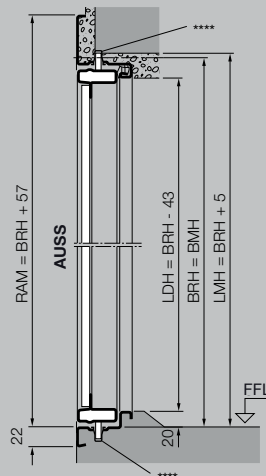

Horizontal view

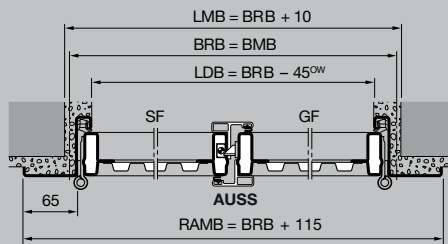

Explanations

BMH	Ordering size height
BRB	Nominal size width
BRH	Nominal size height
LMB	Structural opening width
LMH	Structural opening height
RAMB	Overall frame dimension width
RAMH	Overall frame dimension height
LDB	Clear passage width / clear passage width
LDH	Clear passage height / clear passage height
The clear passage width is reduced if the opening angle is less than 180°.	
W	Overall length of operator ProMatic / SupraMatic
3200 mm up to 2500 mm door height	
FFL	Finished floor level
OW	Opening angle 180°
RSL	Rain canopy
SF	Fixed leaf
GF	Traffic leaf

Please note:

- * Depending on the door style
- ** LDH for doors without threshold + 30 mm
- *** LDH for side door without threshold single-leaf + 15 mm, double-leaf + 20 mm
- **** Recess on location in the area of the U-shaped latching bolt

Standard sizes for single-leaf side doors with corner frame

Ordering size		Structural opening		Clear passage dimension with threshold***		Lever height (approx.)
BRB	BRH	LMB	LMH	LDB	LDH	From FFL
875	1875	885	1880	830	1837	990
	2000	885	2005	830	1962	1050
	2125	885	2130	830	2087	1115
1000	2000	1010	2005	955	1962	1050
	2125	1010	2130	955	2087	1115

Special sizes and versions on request max. size range (BR): 1250 × 2375 mm.

Standard sizes with steel infill and on-site infill doors are supplied for external fitting as standard. Internal fitting is possible by reversing the hinges. Styles with timber infill overlapping the frame are only possible with external fitting.


Size range for double-leaf side doors with corner frame

Width (BRB)	1300 to 2500 mm
Height (BRH)	1750 to 2250 mm


As standard delivered for external fitting, traffic leaf on right hand side, state on order if internal fitting or traffic leaf on left hand side is required!

Fitting variants side doors

External fitting opening outwards

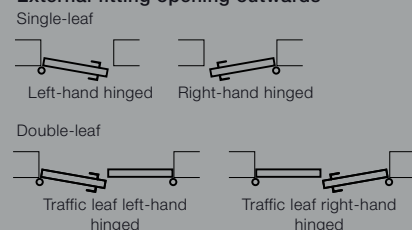

Internal fitting opening inwards

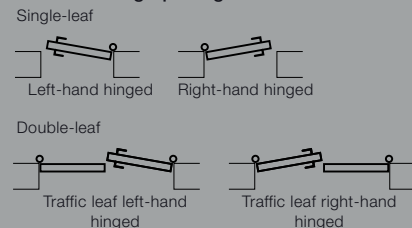


With doors fitted on the inside, the threshold angle or transport angle must always be removed and a water run-off to the outside must be provided. Doors on the weather side are preferably fitted externally.


DIMENSIONS AND FITTING DATA

Side door single-leaf with
65 cm block frame


Vertical view door without threshold

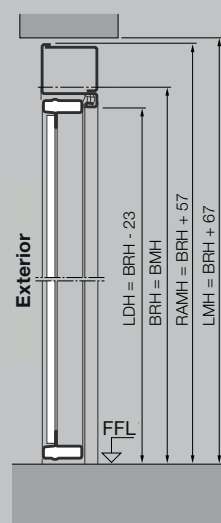Side door double-leaf with
65 cm block frame


Vertical view door with threshold

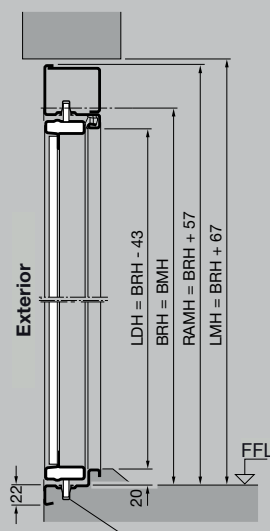

Horizontal view

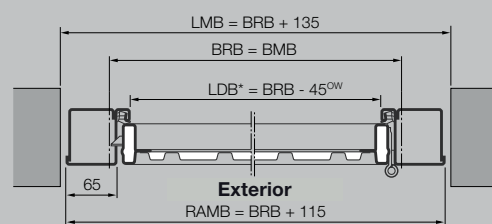

Horizontal view

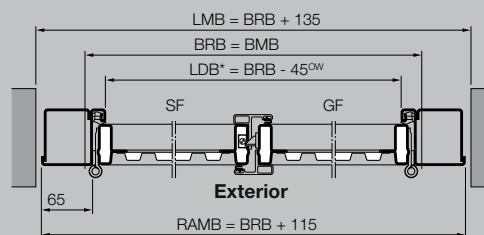

Standard sizes side door single-leaf with 65 cm block frame

Ordering size		Structural opening		Clear passage dimension with threshold*		Lever height (approx.)
BRB	BRH	LMB	LMH	LDB	LDH	From FFL
875	1875	1010	1942	830	1837	990
	2000	1010	2067	830	1962	1050
	2125	1010	2192	830	2087	1115
1000	2000	1135	2067	955	1962	1050
	2125	1135	2192	955	2087	1115

Special sizes and versions on request max. size range (BR): 1250 × 2375 mm.

Standard sizes with steel infill and on-site infill doors are supplied for external fitting as standard. Internal fitting is possible by reversing the hinges. Styles with timber infill overlapping the frame are only possible with external fitting.


Size range for double-leaf side doors with 65 cm block frame

Width (BRB) 1300 to 2500 mm
Height (BRH) 1750 to 2250 mm


As standard delivered for external fitting, traffic leaf on right hand side, state on order if internal fitting or traffic leaf on left hand side is required!

Side door single-leaf with 32 cm block frame

Vertical view door with threshold

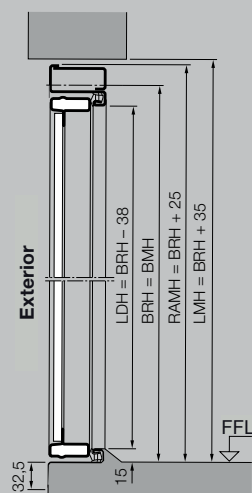


Horizontal view

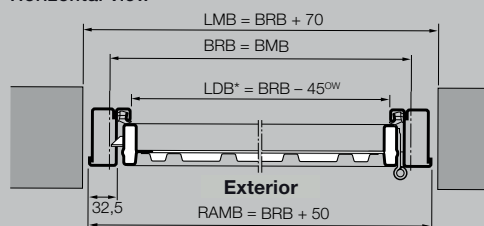


Single-leaf side door with clamp-on frame

Vertical view door with threshold

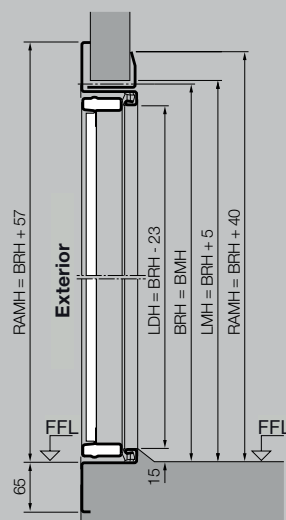

Horizontal view

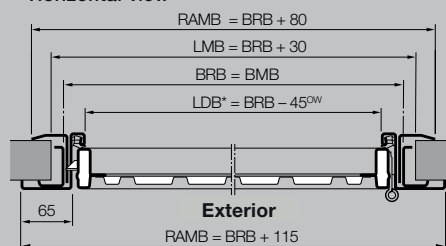

Standard sizes side door single-leaf with 32 cm block frame / clamp-on frame

Ordering size		Structural opening		Clear passage dimension with threshold*		Lever height (approx.)
BRB	BRH	LMB	LMH	LDB	LDH	From FFL
875	1875	945	1910	830	1837	990
	2000	945	2035	830	1962	1050
	2125	945	2160	830	2087	1115
1000	2000	1070	2035	955	1962	1050
	2125	1070	2160	955	2087	1115

Special sizes and versions on request max. size range (BR): 1250 × 2375 mm.

Standard sizes with steel infill and on-site infill doors are supplied for external fitting as standard. Internal fitting is possible by reversing the hinges. Styles with timber infill overlapping the frame are only possible with external fitting.

Explanations


BMB	Ordering size width
BMH	Ordering size height
BRB	Nominal size width
BRH	Nominal size height
LMB	Structural opening width
LMH	Structural opening height
LDB	Clear passage width / clear passage width
LDH	Clear passage height / clear passage height
FFL	Finished floor level
OW	Opening angle 180°
SF	Fixed leaf
GF	Traffic leaf

Please note:



- * LDH for side door without threshold single-leaf + 15 mm, double-leaf + 20 mm
- ** Recess on location in the area of the U-shaped latching bolt

Fitting variants side doors

External fitting opening outwards

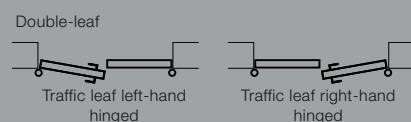

Internal fitting opening inwards



With doors fitted on the inside, the threshold angle or transport angle must always be removed and a water run-off to the outside must be provided. Doors on the weather side are preferably fitted externally.

