




# Side Hinged Garage Doors


## Frames

### Standard

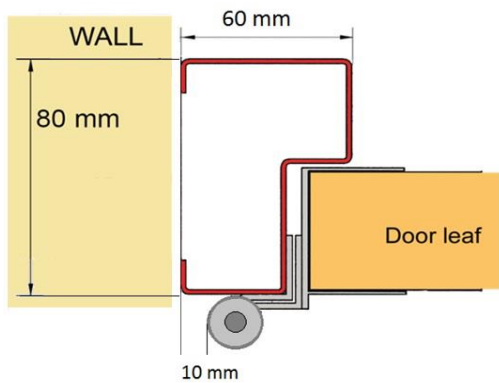


### With moulding

(for flush fitting, closes gap - saves time on decoration)

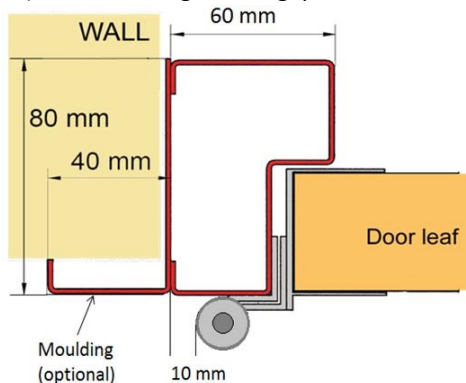


### Tubular frames

(custom & industrial applications)

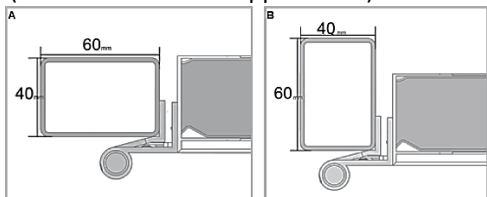


Standard tube sizes :  
40 x 60 / 80 / 100 mm


## Thresholds

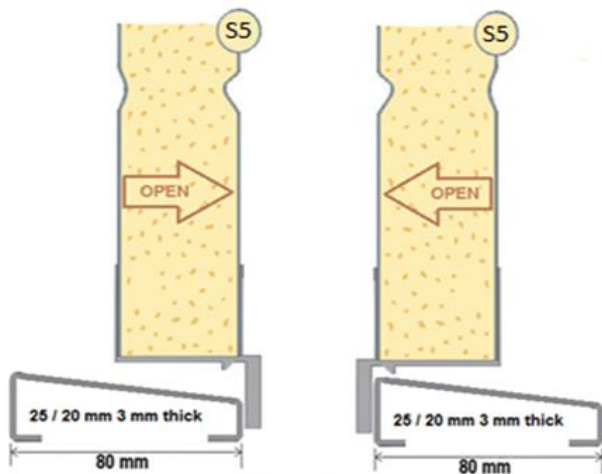

Sloping - S5

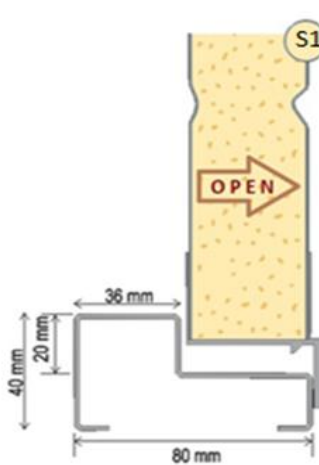

L-shape - S1

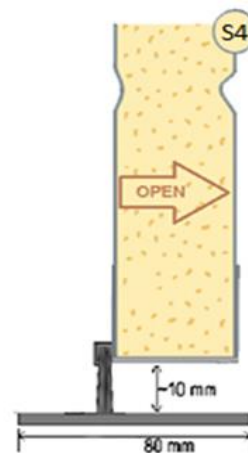

Flat - S4

**S5A** (Sloping) - Flat-packed on site assembly frame. **Universal.**

**S5** (Sloping) - One-piece welded. **Universal.**

**S1** (L-shape) - One-piece welded. **Not suitable for cars.**

**S4** (Flat) - One-piece welded. **Water penetration is likely.**

## Raised Threshold

For sloping or flood risk driveways

Standard option +30 mm increase

For other options consult manufacturer

