
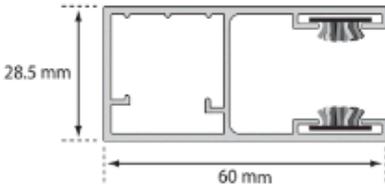
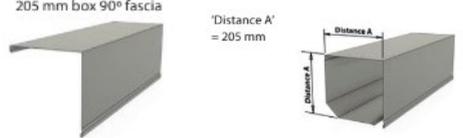
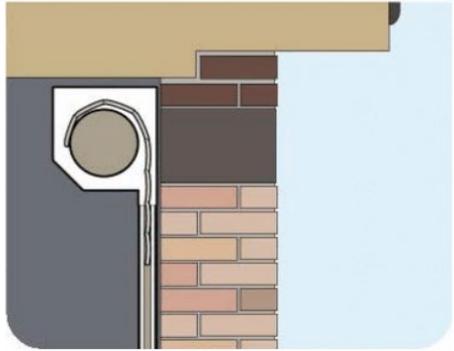
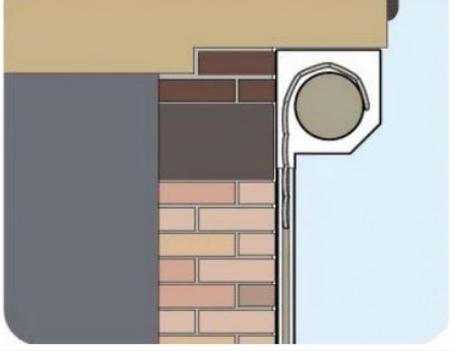
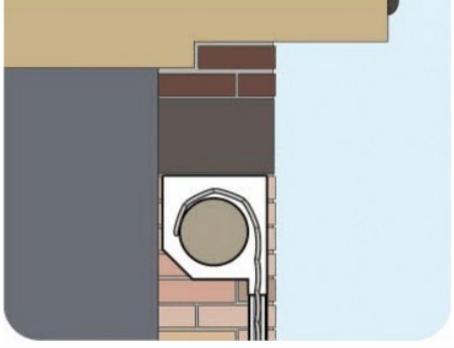


DESCRIPTION	<p>The product is a remote control insulated roller garage door consisting of foam-filled aluminium slats and operated by key fob transmitters as standard.</p> <p>They are designed to require minimal headroom above the opening and are fully CE compliant and safety tested.</p>																				
DOOR DIMENSIONS	Maximum Overall Width: 3000mm	Maximum Overall Height: 2450mm	Headroom Required: 205mm																		
CURTAIN																					
DESCRIPTION	<p>CD300 twin-walled aluminium slat, insulated with CFC-free foam to reduce heat loss and sound transmission.</p>																				
DIMENSIONS	Nominally 55mm high x 14mm thick.																				
WEIGHT	4.5kg per square metre.																				
ASSEMBLY	<p>Slats are held in place use nylon endlocks.</p> <p>For additional strength the door features a 58mm extruded aluminium bottom slat which incorporates a 25mm rubber seal to help prevent water ingress and draughts.</p>		 																		
STANDARD COLOURS	<p>Anthracite, Black, Brilliant White, Brown, Burgundy, Chartwell Green, Fir Green, Ivory, Light Beige, Light Grey, Navy Blue, Silver Metallic</p> <p>5 All come with a 5-year guarantee on the finish of the door.</p>																				
TEXTURED WOODGRAIN COLOURS SURCHARGE	<p>Golden Oak, Mahogany, Rosewood</p> <p>10 All come with a 10-year guarantee on the finish of the door.</p>																				
AXLE ASSEMBLY																					
CONSTRUCTION	<p>60mm axle with collars and locking strap system.</p> 		END PLATES <p>Steel end plates.</p> <p>Available as White, Brown and Fir Green as standard. Other colours available at a surcharge.</p> 																		
MOTOR		<table border="1"> <thead> <tr> <th></th> <th>SeceuroDrive</th> <th>Somfy</th> </tr> </thead> <tbody> <tr> <td>Tubular Motor</td> <td>✓</td> <td>✓</td> </tr> <tr> <td>Manual Override</td> <td>✓</td> <td>✓</td> </tr> <tr> <td>Warranty</td> <td>7-years Requires customer registration</td> <td>5-years</td> </tr> <tr> <td>Speed</td> <td>15RPM</td> <td>17RPM</td> </tr> <tr> <td>Surcharge</td> <td>✗</td> <td>✓</td> </tr> </tbody> </table>		SeceuroDrive	Somfy	Tubular Motor	✓	✓	Manual Override	✓	✓	Warranty	7-years Requires customer registration	5-years	Speed	15RPM	17RPM	Surcharge	✗	✓	
	SeceuroDrive	Somfy																			
Tubular Motor	✓	✓																			
Manual Override	✓	✓																			
Warranty	7-years Requires customer registration	5-years																			
Speed	15RPM	17RPM																			
Surcharge	✗	✓																			
GUIDE RAILS																					
DESCRIPTION	Extruded aluminium with dense brush strip insert for improved insulation.																				
STANDARD COLOURS	Available in White, Brown and Fir Green as standard. Other colours available at a surcharge.																				
DIMENSIONS	Supplied with 60mm wide x 28.5mm deep as standard.																				

CONTROL	
REMOTE UNIT	<p>SeceuroSense Plus or Somfy Rollixo remote receiver unit both with Integral LED courtesy light and two key fob transmitters with rolling code technology.</p> 
SAFETY	Both remote control systems units supplied with a bottom slat safety edge which is pressure sensitive device as standard, available as hardwired or wireless. All doors are supplied with anti-fallback safety device.
SHUTTER BOX	
CONSTRUCTION	<p>Supplied with 90° fascia as standard with optional 45° lid available at a surcharge.</p> <p>Roll formed aluminium in either one or two sections (90° fascia and 45° lid).</p> 
STANDARD COLOURS	Available in White, Brown and Fir Green as standard. Other colours available at a surcharge.
INSTALLATION	
OPTIONS	The doors are extremely versatile and can accommodate curved or non-standard openings. They may be fitted in any of the following ways:
FACE FIX - INTERNAL	<ul style="list-style-type: none"> Installed inside the opening. The inside edge of the guide rails line up with the brick opening. Ideal where headroom inside the garage isn't seriously restricted. Internal reveal fixing may be used to great effect in arched openings. 
FACE FIX - EXTERNAL	<ul style="list-style-type: none"> Installed outside the opening. Ideal where headroom is particularly restricted. Requires full box option for weatherproofing. 
REVEAL FIX	<ul style="list-style-type: none"> Installed within the opening itself. Maximises internal space in the garage whilst not obscuring the exterior of the garage. Requires good reveal headroom. Reduces with drive through width of the door by the width of the guide rails. 

All SeceuroGlide Compact doors come with an Operating & Maintenance manual and handover video for the end user.

Manufactured by SWS UK, Claughton, Lancs, LA2 9LA.