









DESCRIPTION		SeceuroGlide Excel remote control insulated roller garage doors are the first garage doors available on the UK market tested and approved to Police and Insurance standards, certified to the Loss Prevention Certification Board's LPS 1175: Issue 5 burglary resistance standard Level 1 and awarded 'Secured by Design' status by ACPO Crime Prevention Initiatives Ltd.		<div>Secured by Design</div> <div></div> <div>Official Police Security Initiative</div> <div></div> <div>Assessed to ISO 9001 & ISO 14001 Cert/LPCB ref. 390</div>																			
DOOR DIMENSIONS		Maximum Overall Width: 5200mm	Maximum Overall Height: 3500mm <i>At this height the maximum width is restricted to 4000mm</i>	Headroom Required: Up to 2500mm opening height – 300mm Up to 3500mm opening height – 350mm																			
CURTAIN																							
DESCRIPTION		CD77 twin-walled aluminium slat, insulated with CFC-free foam to reduce heat loss and sound transmission.																					
DIMENSIONS		Nominally 78.5mm high x 17mm thick.																					
WEIGHT		XXkg per square metre.																					
ASSEMBLY		Slat are held in place with high performance nylon webbing. For additional strength SeceuroGlide Excel features a 77mm extruded aluminium bottom slat which incorporates a 25mm rubber seal to help prevent water ingress and draughts.			 																		
STANDARD COLOURS		Anthracite, Black, Brilliant White, Brown, Burgundy, Chartwell Green, Fir Green, Ivory, Light Beige, Light Grey, Navy Blue, Silver Metallic <i>All come with a 5-year guarantee on the finish of the door.</i>																					
TEXTURED WOODGRAIN COLOURS SURCHARGE		Golden Oak, Mahogany, Rosewood, White Woodgrain, Black/Brown Woodgrain <i>All come with a 10-year guarantee on the finish of the door.</i>																					
AXLE ASSEMBLY																							
CONSTRUCTION			END PLATES																				
100mm galvanised steel fluted axle with locking collar and bolt. As the door closes, the bolt engages with the end plate's lock comb to secure the door.			Steel endplates. Available as White or Brown as standard. Other colours available at a surcharge.																				
																							
MOTOR		<table><tr><td></td><td>SeceuroDrive</td><td>Somfy</td></tr><tr><td>Tubular Motor</td><td>✓</td><td>✓</td></tr><tr><td>Manual Override</td><td>✓</td><td>✓</td></tr><tr><td>Warranty</td><td>7-years Requires customer registration</td><td>5-years</td></tr><tr><td>Speed</td><td>Up to 50NM - 17RPM 50-100NM - 12RPM</td><td>15RPM (excludes 50 & 100NM)</td></tr><tr><td>Surcharge</td><td>✗</td><td>✓</td></tr></table>					SeceuroDrive	Somfy	Tubular Motor	✓	✓	Manual Override	✓	✓	Warranty	7-years Requires customer registration	5-years	Speed	Up to 50NM - 17RPM 50-100NM - 12RPM	15RPM (excludes 50 & 100NM)	Surcharge	✗	✓
	SeceuroDrive	Somfy																					
Tubular Motor	✓	✓																					
Manual Override	✓	✓																					
Warranty	7-years Requires customer registration	5-years																					
Speed	Up to 50NM - 17RPM 50-100NM - 12RPM	15RPM (excludes 50 & 100NM)																					
Surcharge	✗	✓																					

GUIDE RAILS	
DESCRIPTION	Extruded aluminium with dense brush strip insert for improved insulation.
STANDARD COLOURS	Available in White, Brown and Fir Green as standard. Other colours available at a surcharge.
DIMENSIONS	Supplied 90mm wide x 34mm deep as standard. <div data-bbox="1098 241 1476 398"> </div>
CONTROL	
REMOTE UNIT	SeceuroSense Plus or Somfy Rollixo remote receiver unit both with Integral LED courtesy light and two key fob transmitters with rolling code technology. <div data-bbox="1114 443 1449 667"> </div>
SAFETY	Both remote control systems units supplied with a bottom slat safety edge which is pressure sensitive device as standard, available as hardwired or wireless. All doors are supplied with anti-fallback safety device.
ADDITIONAL SECURITY FEATURES	
BOTTOM SLAT ANCHOR	A patented steel anchor device attached to the extruded bottom slat fits into a special receptacle within the guide rail to prevent the curtain from being forced out of its guides. <div data-bbox="1308 795 1481 958"> </div>
REINFORCING GUIDE RAIL FEET	On doors where the guide rails are fitted within the reveal, SeceuroGlide Excel guide rails feature reinforcing steel shoes to secure them to the floor. <div data-bbox="1289 974 1476 1146"> </div>
SHUTTER BOX	
CONSTRUCTION	Supplied with 90° fascia as standard with optional 45° lid available at a surcharge. <div data-bbox="1093 1198 1476 1332"> <p>Optional Box 'Distance A' = 300 mm 'Distance B' = 350 mm*</p> <p>* 90° section of 350 mm box comes in 2 parts</p> </div>
STANDARD COLOURS	Available in White or Brown as standard. Other colours available at a surcharge.

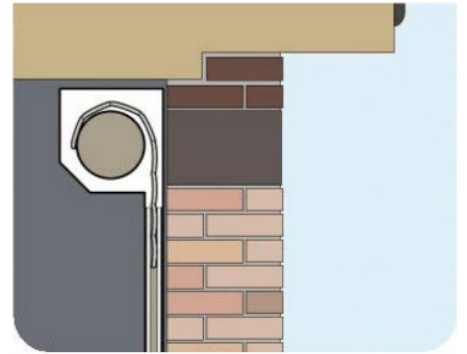
INSTALLATION**OPTIONS**

SeceuroGlide Excel must always be installed by a trained installer and in accordance with the specified fitting criteria (as stated in the installation instructions) in order to meet LPS 1175 certification requirements.

The door must always be fitted internally (as below) with the end plates above the opening. The guide rails may be installed in the reveal (between the opening) but in this instance must be fitted with special steel reinforcing feet.

**FACE FIX -
INTERNAL**

- Installed inside the opening.
- The inside edge of the guide rails line up with the brick opening.
- Ideal where headroom inside the garage isn't seriously restricted.
- Internal reveal fixing may be used to great effect in arched openings.

**REVEAL FIX**

- Installed within the opening itself.
- Must be fitted with special steel reinforcing feet.
- Maximises internal space in the garage whilst not obscuring the exterior of the garage.
- Requires good reveal headroom.
- Reduces with drive through width of the door by the width of the guide rails.



All SeceuroGlide Excel doors come with an Operating & Maintenance manual for the end user.

Manufactured by SWS UK, Cloughton, Lancs, LA2 9LA.