













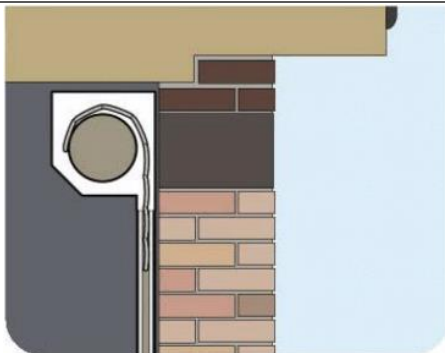
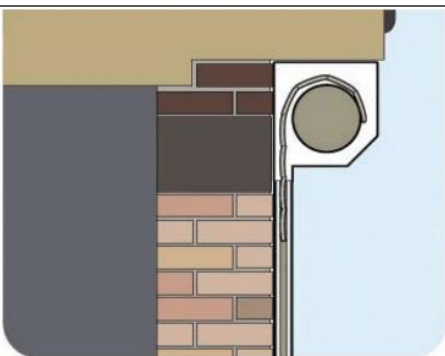
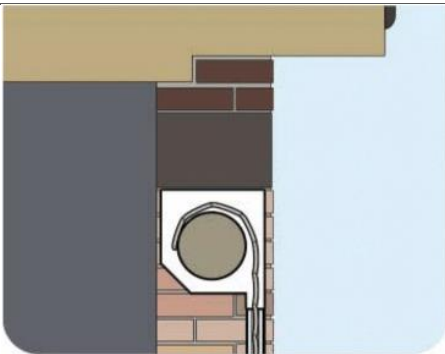


DESCRIPTION	The product is a remote control insulated roller garage doors consisting of foam-filled aluminium slats and operated by key fob transmitters as standard.																				
	They are designed to require minimal headroom above the opening and are fully UKCA compliant and safety tested.																				
DOOR DIMENSIONS	Maximum Overall Width: 5200mm	Maximum Overall Height: 2950mm	Headroom Required: 300mm																		
CURTAIN																					
DESCRIPTION	CD77 twin-walled aluminium slat, insulated with CFC-free foam to reduce heat loss and sound transmission.																				
DIMENSIONS	Nominally 78.5mm high x 17mm thick.																				
WEIGHT	5kg per square metre.																				
ASSEMBLY	Slats are held in place using nylon endlocks.		 																		
	For additional strength the door features a 77mm extruded aluminium bottom slat which incorporates a 25mm rubber seal to help prevent water ingress and draughts.																				
STANDARD COLOURS		Anthracite, Black, Brilliant White, Brown, Burgundy, Chartwell Green, Duck Egg Blue, Fir Green, Graphite, Heritage Green, Ivory, Light Beige, Light Grey, Navy Blue, Pure White, Silver Metallic, Irish Oak painted woodgrain, Golden Oak painted woodgrain. <i>All come with a 5-year guarantee on the finish of the door.</i>																			
TEXTURED WOODGRAIN COLOURS SURCHARGE		Golden Oak, Mahogany, Rosewood, White Woodgrain, Black/Brown Woodgrain, Irish Oak Woodgrain and Anthracite Woodgrain. <i>All come with a 10-year guarantee on the finish of the door.</i>																			
AXLE ASSEMBLY																					
CONSTRUCTION	70mm axle with collars and locking strap system.		END PLATES																		
		Aluminium with nylon rollers. Available powder coated to match the door.																			
																					
MOTOR	<table><tr><td></td><td>SeceuroDrive</td><td>Somfy</td></tr><tr><td>Tubular Motor</td><td>✓</td><td>✓</td></tr><tr><td>Manual Override</td><td>✓</td><td>✓</td></tr><tr><td>Warranty</td><td>5-years</td><td>5-years</td></tr><tr><td>Speed</td><td>15RPM 12RPM for larger doors</td><td>17RPM 12RPM for larger doors</td></tr><tr><td>Surcharge</td><td>✗</td><td>✓</td></tr></table>		SeceuroDrive	Somfy	Tubular Motor	✓	✓	Manual Override	✓	✓	Warranty	5-years	5-years	Speed	15RPM 12RPM for larger doors	17RPM 12RPM for larger doors	Surcharge	✗	✓		
	SeceuroDrive	Somfy																			
Tubular Motor	✓	✓																			
Manual Override	✓	✓																			
Warranty	5-years	5-years																			
Speed	15RPM 12RPM for larger doors	17RPM 12RPM for larger doors																			
Surcharge	✗	✓																			
GUIDE RAILS																					
DESCRIPTION	Extruded aluminium with dense brush strip insert for improved insulation.																				
DIMENSIONS	Doors <b>up to 4500mm wide</b> supplied with 75mm wide x 34mm deep as standard.		Doors <b>over 4500mm wide</b> supplied with 90mm wide x 34mm deep as standard.																		
																					

CONTROL		
REMOTE UNIT	SeceuroSense Plus or Somfy Rollixo remote receiver unit both with Integral LED courtesy light and two key fob transmitters with rolling code technology.	 
SAFETY	Both remote control systems units supplied with a bottom slat safety edge which is a pressure sensitive device as standard, available as hardwired or wireless. Larger doors are supplied with anti-fallback safety device.	
SHUTTER BOX (optional)		
CONSTRUCTION	Roll formed aluminium in either one or two sections (90° fascia and 45° lid).	  
STANDARD COLOURS	White or Brown as standard. Other colours available at a surcharge.	
ASSEMBLY	Half or full box are supplied fully made up. The box can be supplied loose at a reduced price and must be assembled on site.	
INSTALLATION		
OPTIONS	The doors are extremely versatile and can accommodate curved or non-standard openings. They may be fitted in any of the following ways:	
FACE FIX - INTERNAL	<ul style="list-style-type: none"><li>Installed inside the opening.</li><li>The inside edge of the guide rails line up with the brick opening.</li><li>Ideal where headroom inside the garage isn't seriously restricted.</li><li>Internal reveal fixing may be used to great effect in arched openings.</li></ul>	
FACE FIX - EXTERNAL	<ul style="list-style-type: none"><li>Installed outside the opening.</li><li>Ideal where headroom is particularly restricted.</li><li>Requires full box option for weatherproofing.</li></ul>	
REVEAL FIX	<ul style="list-style-type: none"><li>Installed within the opening itself.</li><li>Maximises internal space in the garage whilst not obscuring the exterior of the garage.</li><li>Requires good reveal headroom.</li><li>Reduces with drive through width of the door by the width of the guide rails.</li></ul>	

All SeceuroGlide LT doors come with an Operating & Maintenance manual and handover video for the end user.

Manufactured by SWS UK, Cloughton, Lancs, LA2 9LA.