









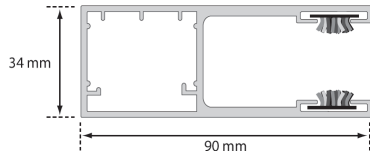




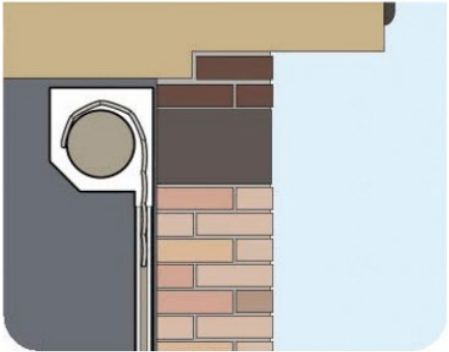
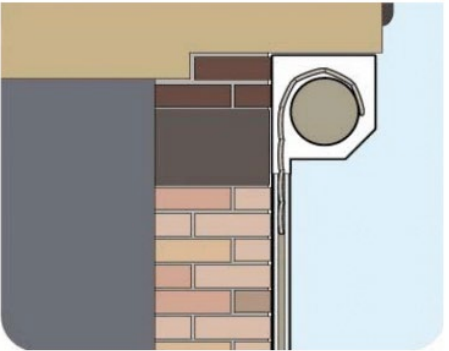
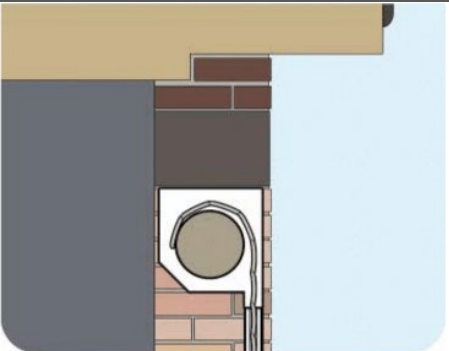


DESCRIPTION	SeceuroGlide Original remote control insulated roller garage doors are manufactured from foam-filled aluminium slats and operated by key fob transmitters as standard. They are designed to require minimal headroom above the opening and are fully CE compliant and safety tested.			<div>Secured by Design</div> <div></div> <div>Official Police Security Initiative</div> <div><div></div><div></div></div> <div>Assessed to ISO 9001 &amp; ISO 14001 Cert/LPCB ref. 390</div>	
DOOR DIMENSIONS	Maximum Overall Width: 5590mm	Maximum Overall Height: 3700mm <i>At this height the maximum width is restricted to 4000mm</i>	Headroom Required: Up to 2500mm opening height – 300mm Up to 3700mm opening height – 350mm		
CURTAIN					
DESCRIPTION	CD77 twin-walled aluminium slat, insulated with CFC-free foam to reduce heat loss and sound transmission.				
DIMENSIONS	Nominally 78.5mm high x 17mm thick.				
WEIGHT	XXkg per square metre.				
ASSEMBLY	Slat assembly details: Slat is held in place with high performance nylon webbing.  For additional strength SeceuroGlide Original features a 77mm extruded aluminium bottom slat which incorporates a 25mm rubber seal to help prevent water ingress and draughts.			 	
STANDARD COLOURS	<div></div> Anthracite, Black, Brilliant White, Brown, Burgundy, Chartwell Green, Fir Green, Ivory, Light Beige, Light Grey, Navy Blue, Silver Metallic <i>All come with a 5-year guarantee on the finish of the door.</i>				
TEXTURED WOODGRAIN COLOURS SURCHARGE	<div></div> Golden Oak, Mahogany, Rosewood, White Woodgrain, Black/Brown Woodgrain <i>All come with a 10-year guarantee on the finish of the door.</i>				
AXLE ASSEMBLY					
CONSTRUCTION	100mm galvanised steel fluted axle with locking collar and bolt.			END PLATES	
As the door closes, the bolt engages with the end plate's lock comb to secure the door.				Steel endplates.	
				Available as White or Brown as standard. Other colours available at a surcharge.	
MOTOR		SeceuroDrive	Somfy		
	Tubular Motor	✓	✓		
	Manual Override	✓	✓		
	Warranty	7-years Requires customer registration	5-years		
	Speed	Up to 50NM - 17RPM 50-100NM - 12RPM	15RPM (excludes 50 & 100NM)		
	Surcharge	✗	✓		

GUIDE RAILS	
DESCRIPTION	Extruded aluminium with dense brush strip insert for improved insulation.
STANDARD COLOURS	Available in White, Brown and Fir Green as standard. Other colours available at a surcharge.
DIMENSIONS	<div> <p>Doors up to 4600mm wide supplied with 75mm wide x 34mm deep as standard.</p>  </div> <div> <p>Doors over 4600mm wide supplied with 90mm wide x 34mm deep as standard.</p>  </div>
CONTROL	
REMOTE UNIT	<p><b>SeceuroSense Plus</b> or <b>Somfy Rollixo</b> remote receiver unit both with Integral LED courtesy light and two key fob transmitters with rolling code technology.</p> 
SAFETY	Both remote control systems units supplied with a bottom slat safety edge which is pressure sensitive device as standard, available as hardwired or wireless. All doors are supplied with anti-fallback safety device.
ADDITIONAL SECURITY FEATURES	
BOTTOM SLAT ANCHOR	<p>A patented steel anchor device attached to the extruded bottom slat fits into a special receptacle within the guide rail to prevent the curtain from being forced out of its guides.</p> 
REINFORCING GUIDE RAIL FEET	<p>On doors where the guide rails are fitted within the reveal, SeceuroGlide Excel guide rails feature reinforcing steel shoes to secure them to the floor.</p> 
SHUTTER BOX	
CONSTRUCTION	<p>Supplied with 90° fascia as standard with optional 45° lid available at a surcharge.</p> <p>Roll formed aluminium in either one or two sections (90° fascia and 45° lid).</p> <div> <p>Optional Box</p> <p>'Distance A' = 300 mm</p> <p>'Distance B' = 350 mm*</p>  <p>* 90° section of 350 mm box comes in 2 parts</p> </div>
STANDARD COLOURS	Available in White or Brown as standard. Other colours available at a surcharge.

INSTALLATION		
OPTIONS	SeceuroGlide Excel must always be installed by a trained installer and in accordance with the specified fitting criteria (as stated in the installation instructions).	
	In order to meet LPS 2081 certification requirements, the door must be face fitted internally with 90mm guide rails.	
FACE FIX - INTERNAL	<ul style="list-style-type: none"> <li>Installed inside the opening.</li> <li>The inside edge of the guide rails line up with the brick opening.</li> <li>Ideal where headroom inside the garage isn't seriously restricted.</li> <li>Internal reveal fixing may be used to great effect in arched openings.</li> </ul>	
FACE FIX - EXTERNAL	<ul style="list-style-type: none"> <li>Installed outside the opening.</li> <li>Ideal where headroom is particularly restricted.</li> <li>Requires full box option for weatherproofing.</li> </ul>	
REVEAL FIX	<ul style="list-style-type: none"> <li>Installed within the opening itself.</li> <li>Maximises internal space in the garage whilst not obscuring the exterior of the garage.</li> <li>Requires good reveal headroom.</li> <li>Reduces with drive through width of the door by the width of the guide rails.</li> </ul>	

All SeceuroGlide Original doors come with an Operating & Maintenance manual and handover video for the end user.

Manufactured by SWS UK, Claughton, Lancs, LA2 9LA.