





Teckentrup 62 Swing Secure is Secured by Design as standard

Secured by Design

SBD


Police Preferred Specification

Tosted to







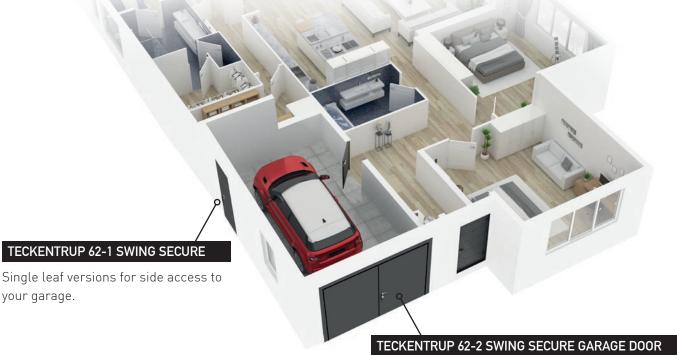

Double leaf versions provide easy access and performance comparable to your front door.





Our doors are independently tested and certified to EN14351-1 and all current safety legislation and carry a CE mark.







Police Preferred Specification

A NEW AND SECURE LOOK FOR GARAGES

The main entrance doors to homes are becoming more attractive and high performance. Hinged swing garage doors, whilst still popular, are limited in choice and performance.

The Teckentrup 62 Swing Secure brings crisp aesthetics and comparable performance to the main entrance door; Thermal Transmittance, Resistance to Windload, Watertightness, Air Permeability and Operating Forces are all certified in these high performance doors.

Add to this, certified security to the Secured by Design Police Preferred Specification as standard, tested to LPS 1175 Issue 8 A1 (SR1) and Teckentrup 62 Swing Secure garage doors are a classic, updated for today's homes. The superb build quality of the double leaf doors is complemented by matching single leaf doors for side an appear accept to

side or rear access to your garage space.

TECKENTRUP DOOR SOLUTIONS





HANDLES

A stainless steel lever handle and security keyed cylinder is the standard configuration for all doors.

Stainless steel
pull handles in two
lengths can also be added in
singles or pairs to add a striking
contemporary look to your door.








1200mm 'D' Handle Pair



1500mm 'D' Handle Pair



Hinge Options

KO hinges are supplied as standard and are matched to the door colour. Stainless steel hinges are

available as an option.



Security

Certified security to The Secured by Design Police Preferred Specification as standard.





Tested to LPS 1175 Issue 8 A1 (SR1)

High Grade Window Options

All window units are laminated glass and available with clear glazing for vision or satin glazing to allow light in with privacy.

Doors with windows are supplied with a lock cylinder that can only be operated by key from outside and inside to maintain security. Should a glazing element be breached in an attempt to enter, the door cannot be opened (an internal thumb turn is not available).



Glazing sizes: 230mm x 1360mm 300mm x 300mm 300mm diameter

Windows are supplied with Anodised Aluminium surrounds with concealed

Glazing Styles





Satin





















Square 300 S3P





Guarantee: All doors have a 2 year quarantee against mechanical defects and a 10 year guarantee against perforation of the door panel. Terms and conditions apply, visit www.teckentrup.co.uk for details.





U VALUE 1.4 Wm²K*

The U value of the door confirms its insulation capability. The value is for a complete door with frame and is exceptionally low (which is good!).



*U value includes a 3mm clearance gap under the door and does not apply to doors with windows.



Automatic Quality

Every Teckentrup 62 Swing Secure is made to order in our automated production facility that operates to quality procedures audited to BS EN ISO 9001: 2008. We care about the environment too - this is why all of our products are certified in accordance with the Environmental Product Declaration (EPD).



Certified Performance

The door and frame are CE marked and have been independently tested to have the following impressive characteristics:

Insulation (Thermal Transmittance)

Resistance to Windload

Watertightness

Air Permeability

Operating Forces

Operating Cycles

Security

EN 13241-1 B: 1.4 Wm²K (door without windows)

EN 12424:Class 2

EN 12425:Class 2

EN 12426:Class 2

EN 12604: 150N

EN1191 C5 (200,000)

Secured by Design Police Preferred Specification



Police Preferred Specification



Tested to LPS 1175 Issue 8 A1 (SR1)

Security



Each door is supplied with a pair of Security keys. Security keys add extra security by preventing unauthorised copying. They cannot be cut by anyone other than the issuer of the key - Teckentrup.

For improved weather protection, a

stepped aluminium threshold with

a bulb weather strip is provided. The door leaves close against the

raised weather strip creating an

improved barrier to dust and debris.

The threshold is DDA compliant for



The inactive leaf is secured with flush bolts to the top and bottom of the leaf.

Secured by Design



Police Preferred Specification

Doors are independently certified for security to the Secured by Design Police Preferred Standard, tested to LPS 1175 Issue 8 A1 (SR1).

Hold Open Stays

Double doors have foot activated stays to hold the door in the open position.



Please note - stays are not designed for high wind applications.

Rain-guard

An anodised aluminium rainguard is supplied with all doors to help limit water ingress at the top of the door.



Frames

wheelchair access.

Threshold

Every door is supplied with a frame. A 'block frame' is the standard option with two variants, the 'Corner Frame' and the 'Corner Counter Frame'. Each frame is made from heavy gauge corrosion protected steel and provides a stable platform for the door to operate.



The block frame is the stand-

ard frame design. Provided

Corner Frame

Inside view

The innovative corner frame wraps around the front corner of the garage opening providing a neat edge. Its slim profile also gives an additional 56 mm drive through width

Requires back-filling with a foam sealant.

compared to a block frame.




Corner Counter Frame

The counter frame wraps around the front and back corner of the garage opening providing a neat edge. Its slim profile also gives an additional 56mm drive through width compared to a block frame.

Requires back-filling with a foam sealant.

FB Profile Option

with Rockwool filling.



The FB Frame option allows for a flush finish between door lip, frame and wall finish on Corner and Corner Counter frames in new openings that are rendered after the door is installed. The FB option also provides a flush finish on block frames that are fixed at the front edge of the garage opening reveal.

Teckentrup is a family business with operations throughout the world. In the UK we make our garage doors in Warrington, Cheshire. CarTeck Automatic is available through a national network of independent Garage Door Specialist installers.

Teckentrup offers more than garage doors: We provide solutions and have set three quality standards for our garage doors:





December 2020



www.garagedoorsonline.co.uk

Design

We combine ease of use with aesthetics.

Good design uses innovative technology to make using a product intuitive and effortless. CarTeck Automatic sectional garage doors offer a wide range of design options that will transform the look of your home and the way you use your garage space.



Safety & Security

We combine security with safety.

Our products are designed to provide peace of mind with both physical security and the knowledge that durability and safe operation are inherent.



Service

We combine speed with reliability.

The Teckentrup team and our network of Garage Door Specialists installers love to make your new door a pleasure to own. From planning to installation. You'll always receive expert advice and the best service for installation, maintenance and aftercare.

Quality & Environment

Teckentrup operates to quality procedures audited to ISO 9001. We care about the environment too - this is why our products are certified in accordance with the Environmental Product Declaration (EPD).

ISO 14001 Environmental Management ISO 50001 Energy Management











