Technical details



The highest level of comfort and safety to meet all requirements and wishes.

Flexible installation

The operator head can be turned through 90° to the left or right. It can therefore adapt flexibly to suit all configurations on site and the operator unit lighting can also be used to illuminate specific areas as required.



Flexible installation



The right operator boom for each garage door

With chain or toothed drive-belt system. Maintenance-free and stable. In addition, the toothed drive-belt system works extremely quiet. With the reinforced ball bearing boom, 1.2 mm thick, it is perfect for situations with particularly heavy loading, such as in underground garages with frequent traffic.

Boom	Length	Movement stroke
Short	3080 mm	2475 mm
Medium	3330 mm	2725 mm
Long	4090 mm	3485 mm






Technical data	Contot	Comfort	2 ²⁰ contott ²⁵	^b o
Pull and thrust force (N)	550	750	1.000	6
Travel speed (mm/Sek.)	•• 160	•• 160	1 60	2
Power consumption in stand-by (W)	4,0	4,0	4,0	I
Light output (extendable)	-`\)- LEC 40/80			-`ζ
Door width (mm)				
a) Sectional doors with single-wall door leaf	5.000	5.500	6.000	5.0
b) Sectional doors with double-wall door leaf	3.000	5.500	6.000	3.0
c) Up-and-over doors	3.500	5.000	6.000	3.
d) Retractable up-and-over doors and canopy doors, with door heights of up to 2.250 mm	3.500 n	5.000	6.000	3.
Door weight (kg)	90	165	200	
Emergency power (backup battery) (*Can be integrated)	back up 700) back up 700) back up 700	back
Rechargeable battery				
Solar				



Sectional doors

www.garagedoorsonline.co.uk

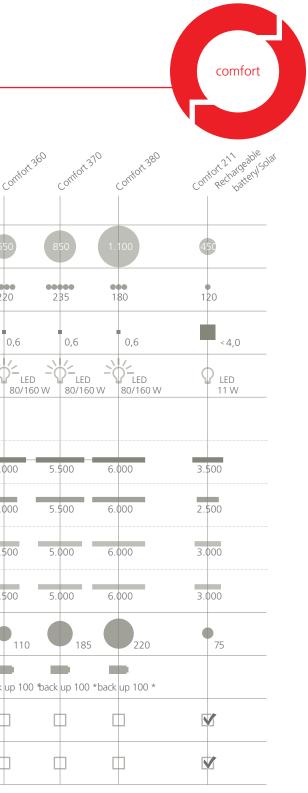



Up-and-over doors