

## Specification Sheet



### Insulated Roller Garage Doors

SeceuroGlide remote control insulated roller garage doors are manufactured from foam-filled aluminium slats and operated by key fob transmitters as standard. They are designed to require minimal headroom above the opening and are fully CE compliant and safety tested.

#### DOOR DIMENSIONS:

<b>Maximum width:</b>	5400mm
<b>Maximum height:</b>	3500mm (At this height the maximum width is restricted to 3000mm)
<b>Headroom required:</b>	300mm (Doors up to 2500mm opening height) 350mm (Doors up to 3500mm opening height)

#### SLATS

<b>Description:</b>	CD77 twin-walled aluminium slat, insulated with CFC-free foam to reduce heat loss and sound transmission.
<b>Dimensions:</b>	Nominally 78.5mm high x 17mm thick
<b>Assembly:</b>	Slats are held in place with high performance nylon webbing. For additional strength SeceuroGlide features a 77mm extruded aluminium bottom slat which incorporates a 25mm rubber seal to help prevent water ingress and draughts.
<b>Standard colours:</b>	White, Burgundy, Navy Blue, Light Beige, Brown, Fir Green, Yellow, Medium Oak, Light Grey, Metallic Silver, Anthracite, Black
<b>Textured woodgrain surcharge colours:</b>	Rosewood, Mahogany, Golden Oak
<b>Vision option:</b>	Optional polycarbonate glazed vision slats are available to allow natural light into the garage. Vision slats do not contain insulation.

#### AXLE ASSEMBLY

<b>Construction:</b>	100mm galvanised steel fluted axle. A locking collar and bolt are incorporated into the axle. As SeceuroGlide closes, the bolt engages with the end plate's lock comb to secure the door.
<b>Motor:</b>	Somfy tubular motor.
<b>End plates:</b>	3mm galvanised steel. Designed to fit into the top of the guide rail for easy location during installation. Feature integral comb lock for security mechanism.

#### GUIDE RAILS

<b>Description:</b>	Extruded aluminium with dense brush strip insert for improved insulation.
<b>Dimensions:</b>	Doors up to 4600mm wide supplied with 75mm wide x 27mm deep as standard. Doors over 4600mm wide supplied with 90mm wide x 34mm deep as standard.
<b>Standard colours:</b>	Powder coated guide rails supplied as standard (Yellow, Light Grey, Anthracite and Metallic Silver colour matched guides subject to a surcharge)

#### CONTROL

<b>Remote unit:</b>	SeceuroSmart remote receiver unit with integral courtesy light and two key fob transmitters with rolling code technology.
<b>Safety:</b>	All SeceuroSmart receiver units supplied with a bottom slat safety edge pressure sensitive device as standard.

**SHUTTER BOX (OPTIONAL)**

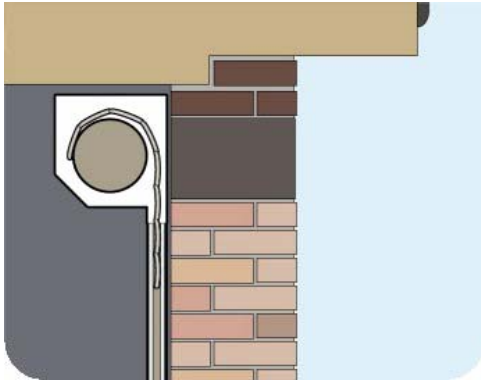
**Construction:** Roll formed aluminium in either one or two sections (90° facia and 45° lid).  
**Standard colours:** White or Brown as standard  
(Available in any of the other plain colour finishes at a surcharge)

**INSTALLATION OPTIONS**

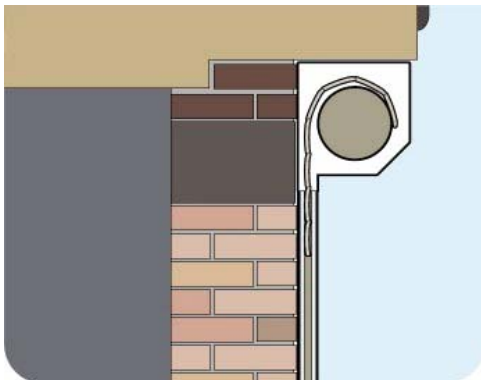
SeceuroGlide are extremely versatile and can accommodate curved or non-standard openings. They may be fitted in any of the following ways:

**Face Fix – Internal**

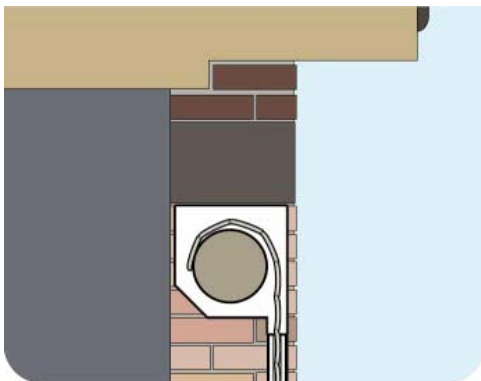
Installed inside the opening. Here the inside edge of the guide rails line up with the brick opening. Ideal where headroom inside the garage isn't seriously restricted. Internal reveal fixing may be used to great effect in arched openings.

**Face Fix – External**

Installed outside the opening. Ideal where headroom is particularly restricted. Requires full box option for weatherproofing.

**Reveal Fix**

Installed with the opening itself. Maximises internal space in the garage whilst not obscuring the exterior of the garage. Requires good reveal headroom. Reveal fixing the door also reduces with drive through width of the door by the width of the guide rails.



Manufactured by SWS UK, Cloughton, Lancs, LA2 9LA.