

# Side Doors for Up-and-Over Garage Doors

## Single-leaf side doors with corner frame

### Fitting dimensions




Subject to change

Up-and-over garage doors  
N 80 and side doors


#### Handing for single-leaf door sets

- Standard sizes with steel infill and on-site infill doors are supplied for external fitting as standard.
- For standard sizes, internal fitting is possible by reversing the hinges.
- Special sizes according to specifications.
- Dual handed, depending on the style.
- Styles with timber infill only available for external fitting.


#### Single-leaf side door with corner frame



Position of anchors

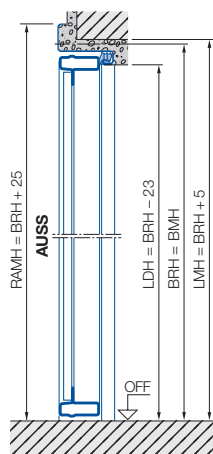



Without threshold

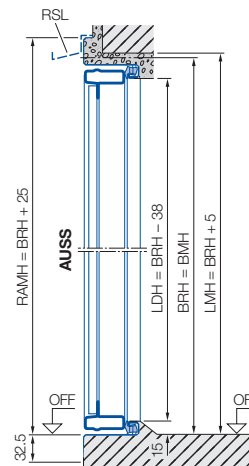

With threshold

#### Frame for single-leaf door set

Viewed width 32.5 mm

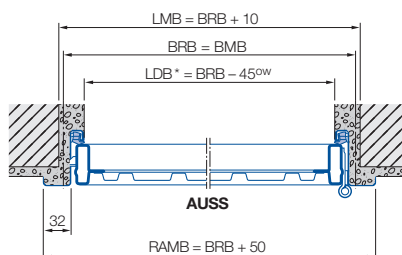


External fitting – opening outwards




Left-hand hinged



Right-hand hinged

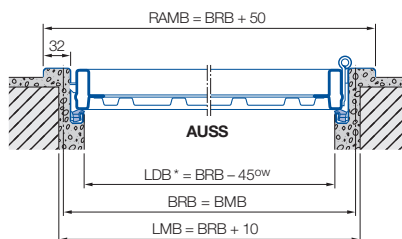

Internal fitting – opening inwards



Left-hand hinged



Right-hand hinged

#### Note:

With doors fitted on the inside, the threshold angle or transport angle must always be removed and a water run-off to the outside must be provided. Doors on the weather side are preferably fitted externally.

\* The clear passage width is reduced if the opening angle is less than 180°.

**AUSS** Exterior  
**BMB** Ordering size width  
**BMH** Ordering size height  
**BRB** Nominal size width  
**BRH** Nominal size height  
**LDB** Clear passage width

**LDH** Clear passage height  
**LI** Left  
**LMB** Structural opening width  
**LMH** Structural opening height  
**OFF** Finished floor level  
**OW** Opening angle

**RAMB** Overall frame width  
**RAMH** Overall frame dimension height  
**RE** Right  
**RSL** Rain canopy