


FITTING DETAILS FOR SERIES 2000 GARAGE SIDE DOORS

Single leaf

Position of anchors

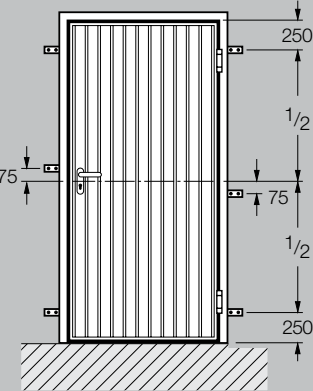

Standard sizes for single-leaf doors (Dimensions in mm)


Ordering size (BR)		Structural opening		Clear passage dimensions			Height of lever handle from FFL
					with threshold	without threshold	
Width	Height	Width	Height	Width	Height	Height	
875	1875	885	1880	830	1837	1852	990
875	2000	885	2005	830	1962	1977	1050
875	2125	885	2130	830	2087	2102	1110
1000	2000	1010	2005	955	1962	1977	1050
1000	2125	1010	2130	955	2087	2102	1110

Standard sizes with steel infill and open-for-infill frames are supplied for external fitting as standard. For internal fitting, fittings can be reversed. Designs with timber infill for external fitting only.

Block frame for fitting into the opening: dimensions and versions on request.


Maximum size range (BR): 1250 x 2375 mm.

Single leaf door with stepped floor

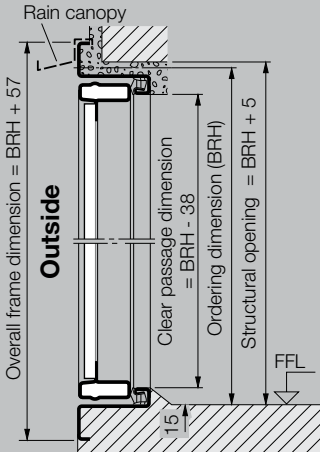



Single leaf door

Supplied with bottom threshold as standard, will be removed on site

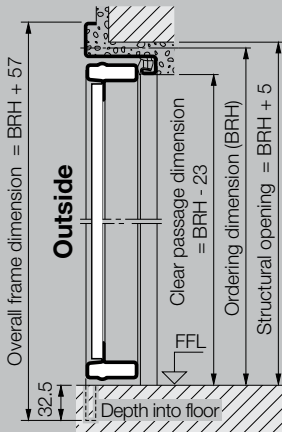

Single leaf door

Supplied without bottom threshold

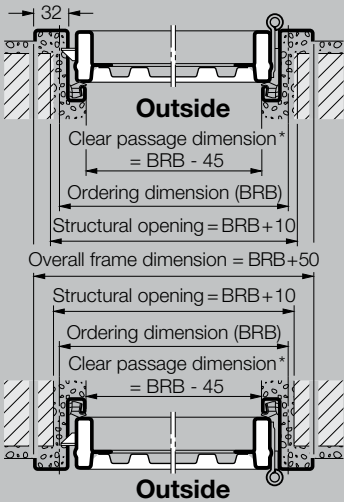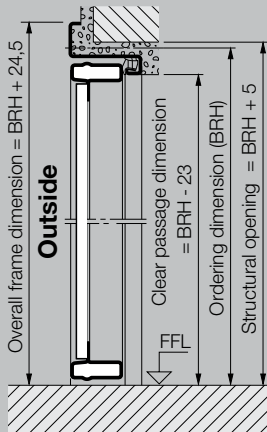

* With an opening angle of less than 180°, the clear passage width is reduced.