




DESCRIPTION	<p>SeceuroGlide Excel remote control insulated roller garage doors are the first garage doors available on the UK market tested and approved to Police and Insurance standards, certified to the Loss Prevention Certification Board's <b>LPS 1175: Issue 5 burglary resistance standard Level 1</b> and awarded 'Secured by Design' status by ACPO Crime Prevention Initiatives Ltd.</p> <p>In addition, SeceuroGlide Excel is fully CE compliant and safety tested.</p>	<p><b>Secured by Design</b></p>  <p>Official Police Security Initiative</p>  <p>Assessed to ISO 9001 &amp; ISO 14001 Cert/LPCB ref. 390</p>
-------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



DOOR DIMENSIONS	<b>Maximum Overall Width:</b> 5200mm	<b>Maximum Overall Height:</b> 3500mm <i>At this height the maximum width is restricted to 4000mm</i>	<b>Headroom Required:</b> Up to 2500mm opening height – 300mm Up to 3500mm opening height – 350mm
-----------------	-----------------------------------------	-------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------

**CURTAIN**

DESCRIPTION	CD77 twin-walled aluminium slat, insulated with CFC-free foam to reduce heat loss and sound transmission.	
-------------	-----------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------

DIMENSIONS	Nominally 78.5mm high x 19mm thick.
------------	-------------------------------------



WEIGHT	5kg per square metre.
--------	-----------------------

ASSEMBLY	<p>Slats are held in place with high performance nylon webbing.</p> <p>For additional strength SeceuroGlide Excel features a 77mm extruded aluminium bottom slat which incorporates a 25mm rubber seal to help prevent water ingress and draughts.</p>	 
----------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------





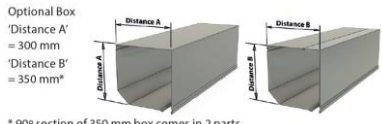
STANDARD COLOURS	<p>Anthracite, Black, Brilliant White, Brown, Burgundy, Chartwell Green, Fir Green, Ivory, Light Beige, Light Grey, Navy Blue, Silver Metallic, Irish Oak painted woodgrain and Golden Oak painted woodgrain.</p> <p><b>5</b> <i>All come with a 5-year guarantee on the finish of the door.</i></p>
------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

TEXTURED WOODGRAIN COLOURS SURCHARGE	<p>Golden Oak, Mahogany, Rosewood, White Woodgrain, Black/Brown Woodgrain, Irish Oak Woodgrain and Anthracite Woodgrain.</p> <p><b>10</b> <i>All come with a 10-year guarantee on the finish of the door.</i></p>
--------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**AXLE ASSEMBLY**

CONSTRUCTION	100mm galvanised steel fluted axle with plastic locking collar with aluminium top slat hinges.		END PLATES	<p>Steel endplates. As the door closes, the bolt engages with the end plate's locking block to secure the door.</p> <p>Available as White or Brown as standard. Other colours available at a surcharge.</p>	
--------------	------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------	------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------

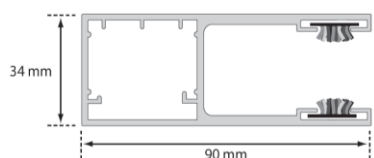MOTOR		SecuroDrive	Somfy
	Tubular Motor	✓	✓
	Manual Override	✓	✓
	Warranty	7-years <small>Requires customer registration</small>	5-years
	Speed	15RPM 12RPM for larger doors	17RPM 12RPM for larger doors
	Surcharge	✗	✓

GUIDE RAILS	
DESCRIPTION	Extruded aluminium with dense brush strip insert for improved insulation.
STANDARD COLOURS	Available in White, Brown and Fir Green as standard. Other colours available at a surcharge.
DIMENSIONS	Supplied 90mm wide x 34mm deep as standard. <div style="text-align: right;">  </div>
CONTROL	
REMOTE UNIT	<p><b>SeceuroSense Plus</b> or <b>Somfy Rollixo</b> remote receiver unit both with Integral LED courtesy light and two key fob transmitters with rolling code technology.</p> <div style="text-align: right;">  </div>
SAFETY	Both remote control systems units supplied with a bottom slat safety edge which is pressure sensitive device as standard, available as hardwired or wireless. All doors are supplied with anti-fallback safety device.
ADDITIONAL SECURITY FEATURES	
BOTTOM SLAT ANCHOR	<p>A patented steel anchor device attached to the extruded bottom slat fits into a special receptacle within the guide rail to prevent the curtain from being forced out of its guides.</p> <div style="text-align: right;">  </div>
REINFORCING GUIDE RAIL FEET	<p>On doors where the guide rails are fitted within the reveal, SeceuroGlide Excel guide rails feature reinforcing steel shoes to secure them to the floor.</p> <div style="text-align: right;">  </div>
SHUTTER BOX	
CONSTRUCTION	<p>Supplied with pre-built 90° fascia as standard with optional 45° lid available at a surcharge.</p> <p>Roll formed aluminium in either one or two sections (90° fascia and 45° lid).</p> <p>All boxes are pre-cut with a choice of override exits.</p> <div style="text-align: right;">  <p>Optional Box  'Distance A' = 300 mm  'Distance B' = 350 mm*</p> <p>* 90° section of 350 mm box comes in 2 parts</p> </div>
STANDARD COLOURS	Available in White or Brown as standard. Other colours available at a surcharge.

## INSTALLATION

### OPTIONS


SeceuroGlide Excel must always be installed by a trained installer and in accordance with the specified fitting criteria (as stated in the installation instructions) in order to meet LPS 1175 certification requirements.

The product should only be installed to brick, block work, structural steel or structural timber to be certified.

The door must always be fitted internally (as below) with the end plates above the opening. The guide rails and box may be installed in the reveal (between the opening) but in this instance must be fitted with special steel reinforcing shoes and reinforced end plates.


### FACE FIX - INTERNAL

- Installed inside the opening.
- The inside edge of the guide rails line up with the brick opening.
- Ideal where headroom inside the garage isn't seriously restricted.
- Internal reveal fixing may be used to great effect in arched openings.

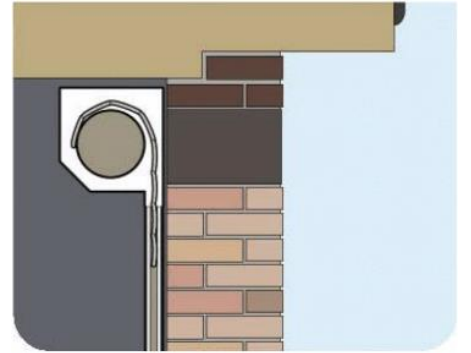

### REVEAL FIX

- Installed within the opening itself.
- Must be fitted with special steel reinforcing feet.
- Maximises internal space in the garage whilst not obscuring the exterior of the garage.
- Requires good reveal headroom.
- Reduces with drive through width of the door by the width of the guide rails.

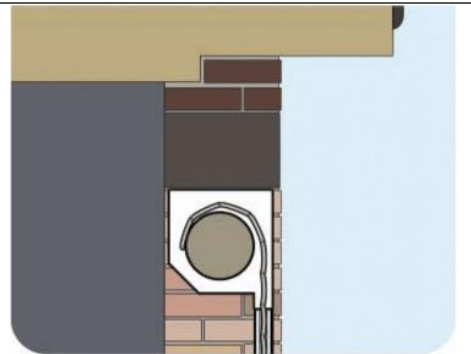

All SeceuroGlide Excel doors come with an Operating & Maintenance manual for the end user.

Manufactured by SWS UK, Claughton, Lancs, LA2 9LA.