


UP AND OVER COLOUR BROCHURE

Steel Up and Over Garage Doors

The GDO Classic range, with matching pedestrian doors and garden gates

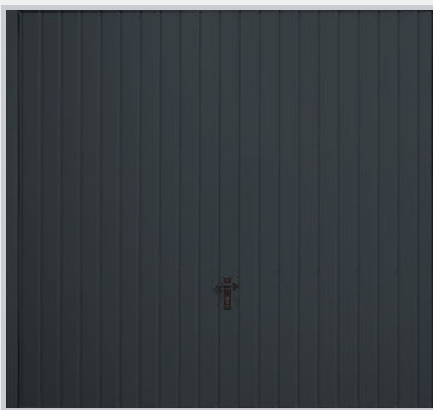

RIBBED

Standard Vertical



PANELLED

Highworth



WITH WINDOWS

Vertical Mid Rib with Windows



Made to Measure Steel Up and Over
Garage Doors with Strength

GARAGEDOORSONLINE
THE UK'S PREMIER ONLINE GARAGE DOOR SUPPLIER

Welcome to the range

An up and over door is still the most common garage door on UK homes, and there's a good reason for that. It's one solid steel panel that lifts up and out of the way, it latches into the frame at the bottom corners, and there's very little to go wrong.


The GDO Classic up and over range is pressed from galvanised steel, powder coated on both sides and supplied in a factory fitted 50mm steel sub frame with the lifting gear already mounted. There are 13 made to measure designs across ribbed, panelled and window styles, plus five standard size special offers, all with a choice of canopy or retractable gear and 32 colours. Towards the back you'll also find the Classic and Icon pedestrian doors and our steel garden gates, so the side door and the gate can match the garage door.

In this brochure

- | | | | |
|----------|--------------------------------|-----------|---------------------------|
| 3 | Canopy or retractable gear | 10 | 32 colour options |
| 4 | How the doors are made | 11 | Measuring and ordering |
| 5 | Ribbed designs | 12 | Up and over technical |
| 6 | Panelled designs | 13 | Matching pedestrian doors |
| 7 | Designs with windows | 14 | Steel garden gates |
| 8 | Standard size special offers | 15 | Our guarantee |
| 9 | Options and electric operation | 16 | Talk to our team |

Matching pedestrian doors

Classic and Icon pedestrian doors in the same rib styles and colours as the up and over doors, for a side or rear entrance. See page 13.

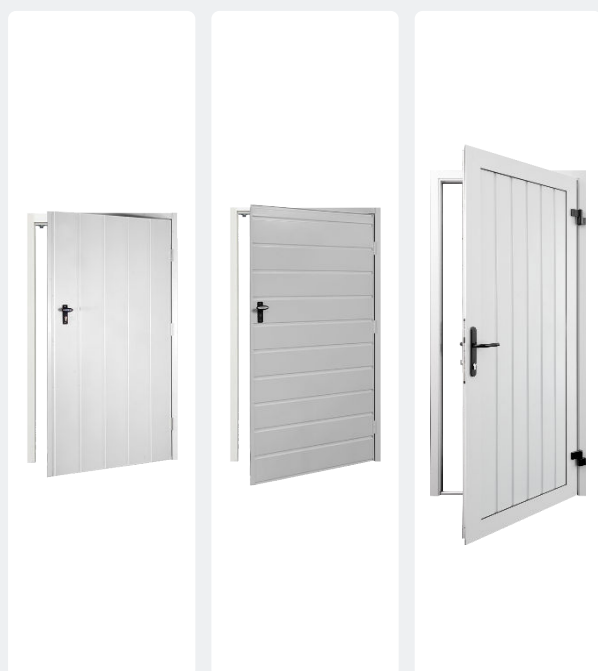

Classic

Classic

Icon

Steel garden gates

Two narrow rib steel pedestrian gates, made to measure and finished in the same 32 colours, for side passages and garden entrances. See page 14.



Horizontal

Vertical

Canopy or retractable gear

Every made to measure design can be ordered with canopy or retractable gear, and from the outside you won't see any difference once the door is shut. What changes is the way the door moves, how much room it needs in front and behind, and whether an electric operator can be fitted.



Canopy gear

Spring assisted, for manual use

A torsion spring across the head of the frame does the lifting, with a cable down each side. When the door's fully open, roughly a third of the panel sits outside the garage like a canopy, which is where the name comes from.

- Nothing runs back into the garage, so the ceiling stays clear for storage
- Light, balanced manual operation
- An anti drop device holds the door if a lifting cable ever fails
- Manual only, as canopy doors can't be automated



Retractable gear

Runs back into the garage on tracks

Lifting arms and tension springs sit either side of the frame, with horizontal tracks running back into the garage. The door swings out a little further on the way up, then the whole panel rolls inside on polymer rollers.

- Nothing left sticking out over the drive when it's open
- Smooth, quiet travel in suspended tracks
- The one to choose if you want an electric operator, now or later
- Needs a minimum overall height of 1929mm

AT A GLANCE	Canopy	Retractable
Lifting gear	Torsion spring and cables	Tension springs, arms and tracks
Out swing in front (kick out)	665mm to 860mm, by door height	Up to 1200mm
Room needed behind the frame	About 1280mm	About 1850mm
Drive through width *	Frame opening less 30mm	Frame opening less 70mm
Drive through height *	Frame opening less 116mm	Frame opening less 116mm
Electric operation	Not available	800 XL operator available
Overall widths	Up to 2750mm, by design	Up to 2750mm, by design

* Drive through sizes are measured between the gear, seals and door leaf with the door fully open, and don't include the handle. Heights can be adjusted a little either way by the final fixing position. Room figures are a guide for a door around 2134mm x 1981mm, so see page 12 for the detail.

How the doors are made

Every GDO Classic up and over door starts as a single sheet of galvanised steel, pressed to the design and then polyester powder coated on both sides. It's braced on the inside, mounted in its steel frame and balanced at the factory, so it arrives as one complete unit ready to fix.

50mm

Steel sub frame, factory fitted, white or colour matched

2 point

Cable operated latching at the bottom corners

32

Powder coated colours for the door and frame

2 years

Guarantee on the door panel, parts and paint



Inside a canopy door, showing the bracing and latch cables

What comes with every door


- A galvanised steel panel, pressed to shape and powder coated on both faces
- A sub chassis with bracing plates on the inside, so the panel stays rigid
- A 50mm steel sub frame, fitted at the factory in white or the door colour
- Lifting gear mounted and balanced on the frame, with nothing to build up on site
- A black lockable handle outside, with an internal turn handle
- Cable operated latches at each bottom corner, worked by the handle
- A euro profile cylinder with 2 keys
- UKCA and CE marked to current safety legislation

* The door panel is ordered by its overall size including the frame, so there's no separate frame to buy or make up.


Up close



Bracing plates on the sub chassis keep the panel flat and rigid




Canopy spring with cable drums and the anti drop device




Spring tube and centre bracket across the frame head



Retractable gear runs on polymer rollers in its tracks




The internal lock handle, linked to the latches by cable



A spring loaded latch at the bottom corner of the frame

Ribbed designs

Six ribbed designs in three rib widths, each in vertical or horizontal. Narrow ribs give the traditional look most people picture for an up and over door, while the wider ribs keep the face of the door plainer and suit more modern houses.

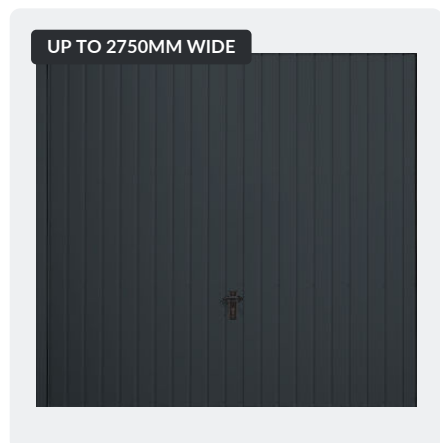

GDO Classic Standard Vertical

Shown in Anthracite Grey


Narrow vertical ribs set close together. A traditional look that sits well on most brick built houses.



GDO Classic Standard Horizontal Rib

Shown in Traffic White

Narrow ribs running across the door, giving a lower, wider look that works well on bungalows and modern homes.

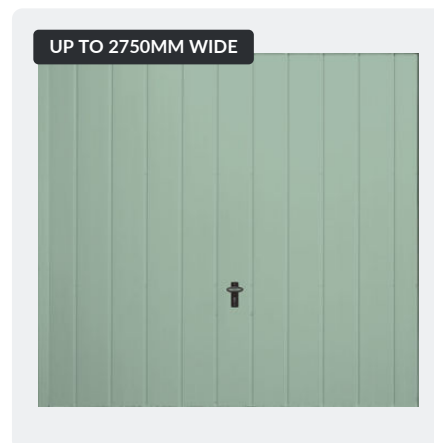

GDO Classic Mid Vertical

Shown in Chartwell Green

Wider spaced vertical ribs for a cleaner face than the Standard Vertical, with the same traditional feel.



GDO Classic Mid Horizontal Rib

Shown in Agate Grey

Fewer, wider horizontal ribs. A good match for composite front doors and newer house types.



GDO Classic Wide Vertical

Shown in Steel Blue

Just a few deep vertical ribs across the panel, so from the street it reads as an almost plain door.



GDO Classic Wide Horizontal Rib

Shown in Cream

Three wide horizontal ribs on a flat face. The most minimal look in the up and over range.

Good to know

- All six are made to measure, with canopy or retractable gear, up to 2184mm high overall.
- Standard Vertical, Standard Horizontal Rib, Mid Vertical and Mid Horizontal Rib are also sold in standard sizes. See page 8.
- Classic pedestrian doors match the Standard and Medium rib designs, and Icon pedestrian doors add the Wide rib. See page 13.

Panelled designs


Raised and fielded panels pressed into the steel give these doors a traditional, joinery style look without the upkeep of timber. They suit Georgian, Victorian and Edwardian style houses, and newer homes with panelled front doors or sash style windows.



GDO Classic Dorridge

Shown in Traffic White


Twelve panels in four columns. The most formal of the panelled designs, and a good fit on wider single openings.

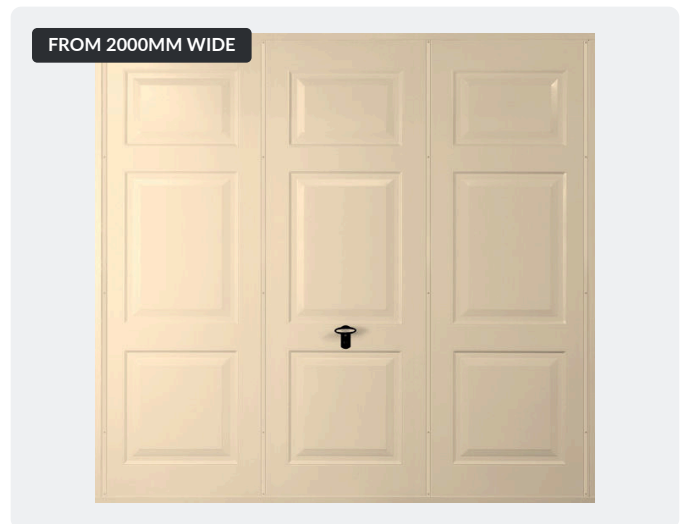

GDO Classic Highworth

Shown in Light Ivory

Nine panels in three columns, with shorter panels along the top row. A classic Georgian style.

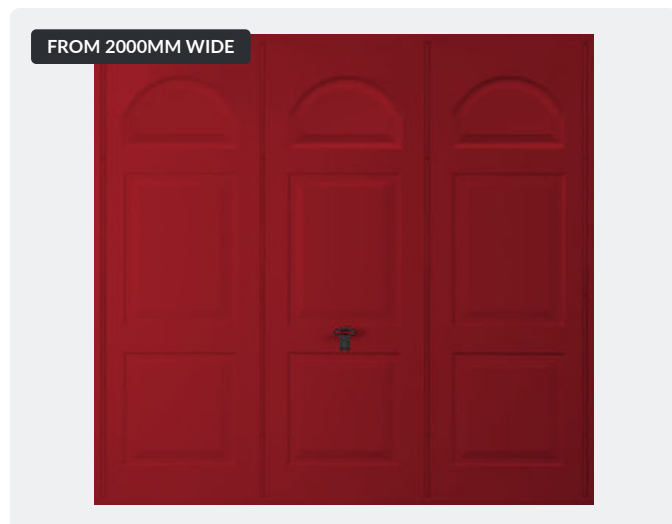

GDO Classic Kingham

Shown in Ruby Red

Three columns of panels with an arched panel at the top of each, for a softer look on period houses.



GDO Classic Highworth with Windows

Shown in Slate Grey

The Highworth with three windows in place of the top panels, letting daylight into the garage.

Sizes for panelled doors

All four are made to measure up to 2600mm wide and from 1955mm to 2184mm high overall, with canopy or retractable gear. Because the panels are set out in columns, there's a minimum width for each design, shown on the cards above.


Designs with windows

A row of windows across the top of the door lets daylight into the garage, which makes a real difference if you work in there or use it as a store. The windows are perspex, so there's no glass to break, and each design has a set window layout.




GDO Classic Vertical Standard Rib with Windows

Shown in Traffic White, Waterford windows
Standard vertical ribs below three windows.
Shown here with the diamond pattern
Waterford style.

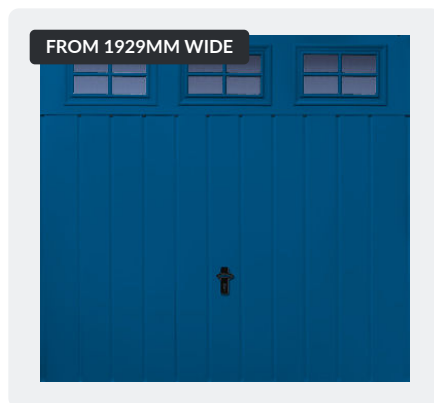

GDO Classic Vertical Mid Rib with Windows

Shown in Gentian Blue, Stockton Cross windows
The Mid Vertical rib below three windows,
for a cleaner face with daylight above.

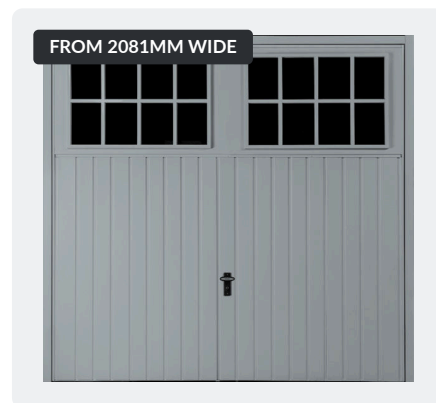


GDO Classic Vertical Standard Rib Hartshill with Windows

Shown in Window Grey, black mock windows
Two large eight pane windows over standard
vertical ribs, a carriage house style look.


Window styles and glazing

On the Vertical Standard Rib and Vertical Mid Rib designs, and the Highworth with Windows, choose the window style and the glazing. Window inserts are white as standard, or colour matched to the door at no extra cost.


WINDOW STYLE



Plain




Stockton Cross



Waterford


GLAZING



Clear



Stippled



Black mock


- Up to 3 windows on doors up to 8ft (2438mm) wide. Please ask about other sizes.
- The Hartshill comes with black mock windows as standard. Stippled or clear glazing can be fitted at extra cost.
- Retractable doors with windows need a minimum overall height of 1929mm, the same as the ribbed designs.

Design	Windows	Glazing	Min overall width
Vertical Standard Rib with Windows	3, choice of style	Clear, stippled or black mock	1929mm
Vertical Mid Rib with Windows	3, choice of style	Clear, stippled or black mock	1929mm
Highworth with Windows	3, in the top panels	Clear, stippled or black mock	2000mm
Hartshill with Windows	2 large eight pane	Black mock *	2081mm


* Clear or stippled glazing in the Hartshill windows at extra cost.

Standard size special offers


If your opening suits a standard UK size, these five designs are made in eight set widths and two heights, at a lower price than the made to measure versions. The standard sizes refer to the overall frame size, and you can still choose canopy or retractable gear and any of the 32 colours.

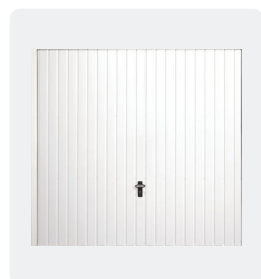


GDO Classic Standard
Vertical Rib

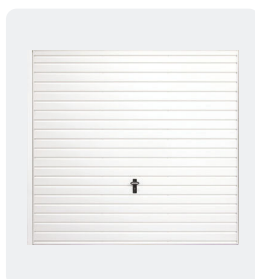


GDO Classic Standard
Horizontal Rib

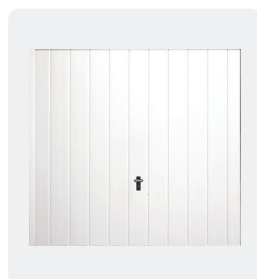

GDO Classic Medium
Vertical Rib

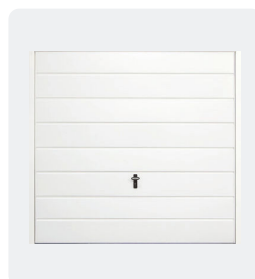

GDO Classic Medium
Horizontal Rib

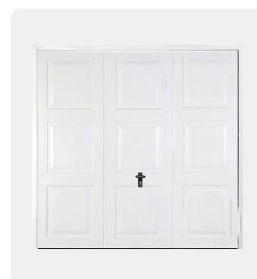

GDO Classic Georgian

Standard sizes

Order by the size reference. The overall size is the door and frame together.

Nominal width	Overall width	6ft 6in high	7ft 0in high
6ft 6in	2081mm	2081 x 2031mm	2081 x 2184mm
6ft 10in	2183mm	2183 x 2031mm	2183 x 2184mm
7ft 0in	2234mm	2234 x 2031mm	2234 x 2184mm
7ft 1in	2259mm	2259 x 2031mm	2259 x 2184mm
7ft 3in	2310mm	2310 x 2031mm	2310 x 2184mm
7ft 5in	2361mm	2361 x 2031mm	2361 x 2184mm
7ft 6in	2386mm	2386 x 2031mm	2386 x 2184mm
8ft 0in	2538mm	2538 x 2031mm	2538 x 2184mm

* Standard size doors are made to these sizes only. If your opening falls between two sizes, or you need a different height, the made to measure designs on pages 5 to 7 are the better route. Imperial references relate to the nearest overall frame size rather than an exact conversion.

Which route suits you?

Standard sizes. Best when you're replacing an existing standard door of the same size and the frame sits behind the brick piers, so a little extra overlap doesn't matter.

Made to measure. Best for openings that aren't a standard size, for a between the piers fit, or when you want one of the panelled or window designs. There's no extra charge for made to measure sizes.

Options and electric operation

The standard door comes ready to use with its handle, latches and keys. These are the options you can add when you order, along with the electric operator for retractable doors.

Frame finish

The 50mm steel sub frame can be white, or powder coated to match the door colour. Both are no extra cost.

Handle

A black lockable handle is fitted as standard. If the door is being automated, you can order it with no handle and no handle hole drilled.

4 point security locking

An upgrade to the locking for extra security. Available on manual doors only.

Keyed alike

Ordering a GDO pedestrian door as well? Ask for matching lock cylinders and one key will open both doors.



Electric operation

Retractable doors can be ordered with the 800 XL electric operator, supplied with 2 remote control transmitters. Canopy doors are manual only.

- The motor carriage travels along a fixed chain, so there's only one moving part and it runs quietly
- Rolling code transmitters on 868 MHz, which stops the code being copied
- The carriage holds the door shut in its track, which resists the door being forced up
- An internal pull cord releases the motor so you can open the door by hand in a power cut
- Extra transmitters are available when you order

Worth adding

- **De latch kit.** Links the bottom corner latches to the operator, so the door is locked into the frame as well as held by the motor.
- **External emergency release.** Essential if there's no other way into the garage, as it lets you release the operator from outside with a key.

800 XL

For retractable gear

2




Transmitters supplied

868 MHz

Rolling code remotes

32 colour options


Every up and over door and its frame can be powder coated in any of the 32 colours below, and the Classic and Icon pedestrian doors and the garden gates use the same palette, so everything at the front of the house can match. Traffic White, Anthracite Grey and Jet Black are no extra cost on the doors, and the other 29 colours carry a small charge.

 NO EXTRA COST			
Traffic White RAL 9016	Signal Grey RAL 7004	Dusty Grey RAL 7037	Traffic Grey RAL 7042
			
Light Grey RAL 7035	Window Grey RAL 7040	Basalt Grey RAL 7012	Pebble Grey RAL 7032
			 NO EXTRA COST
Iron Grey RAL 7011	Slate Grey RAL 7015	Graphite Grey RAL 7024	Anthracite Grey RAL 7016
		 NO EXTRA COST	
Agate Grey RAL 7038	Black Grey RAL 7021	Jet Black RAL 9005	Steel Blue RAL 5011
			
Cobalt Blue RAL 5013	Sky Blue RAL 5015	Gentian Blue RAL 5010	Signal Blue RAL 5005
			
Light Blue RAL 5012	Moss Green RAL 6005	Fir Green RAL 6009	Chartwell Green BS 14 C 35
			
Ruby Red RAL 3003	Traffic Red RAL 3020	Chocolate Brown RAL 8017	Clay Brown RAL 8003
			
Mahogany Brown RAL 8016	Light Ivory RAL 1015	Cream RAL 9001	Traffic Yellow RAL 1023

* Colours shown are a guide only, as printed and on screen colours can vary from the factory finish. Other RAL colours can be powder coated on request at extra cost, priced on application. On the steel garden gates, all 32 colours are included in the price.

Measuring and ordering

Every GDO up and over door is ordered by its overall width and overall height, which is the door and its 50mm steel frame together. Before you measure, decide whether the frame will sit behind the brick piers or between them, as that changes the size you order.

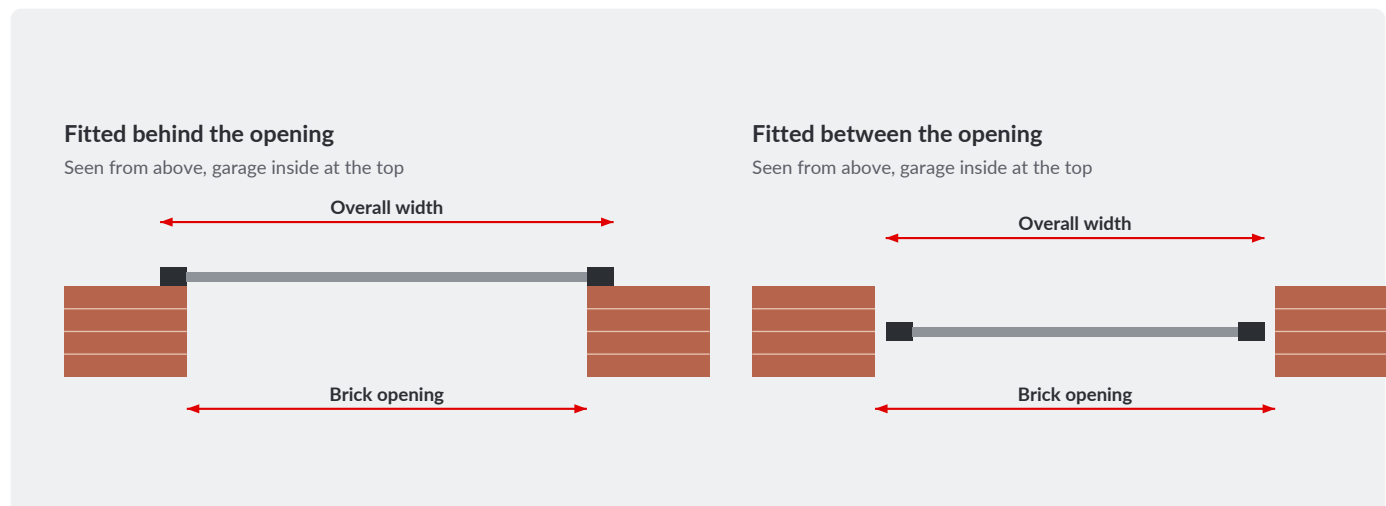

Fitting behind the opening

The frame fixes to the inside face of the piers, which keeps the full brick opening clear to drive through. You'll need at least 50mm of flat pier face on each side and 50mm of lintel above. Make sure the frame opening is no wider than the brick opening, so the door panel clears the brickwork as it swings.

Taking the measurements

Measure the width at the top, middle and bottom, and the height at both sides, then work from the smallest figures. We'd suggest allowing 8mm to 10mm of fitting tolerance per side.

Fitting between the opening

The frame sits inside the opening, between the piers. Order the overall size slightly smaller than the brick opening, allowing roughly 10mm on the width and 5mm on the height, plus some packing room either side.

Floor and headroom

A level floor is essential for the best results, as the latches drop into the frame at the bottom corners. Canopy doors need no extra headroom above the frame, and retractable doors need clear space for the tracks behind it.


Design	Overall width	Height, canopy	Height, retractable
Standard and Mid rib, vertical or horizontal	C 1776 / R 1624 to 2750mm	1574 to 2184mm	1929 to 2184mm
Wide rib, vertical or horizontal	C 1776 / R 1624 to 2600mm	1574 to 2184mm	1929 to 2184mm
Vertical Standard and Mid Rib with Windows	1929 to 2600mm	1650 to 2184mm	1929 to 2184mm
Hartshill with Windows	2081 to 2600mm	1879 to 2184mm	1929 to 2184mm
Highworth, Highworth with Windows, Kingham	2000 to 2600mm	1955 to 2184mm	1955 to 2184mm
Dorridge	2183 to 2600mm	1955 to 2184mm	1955 to 2184mm

* All sizes are overall, including the 50mm frame. C is canopy gear and R is retractable. If your opening is close to a limit, give us a call before you order.

Up and over technical


The figures below are for installers and anyone checking a tight opening. They're based on single framed doors, and the final drive through can be adjusted a little either way by where the frame is fixed.

Canopy, side view

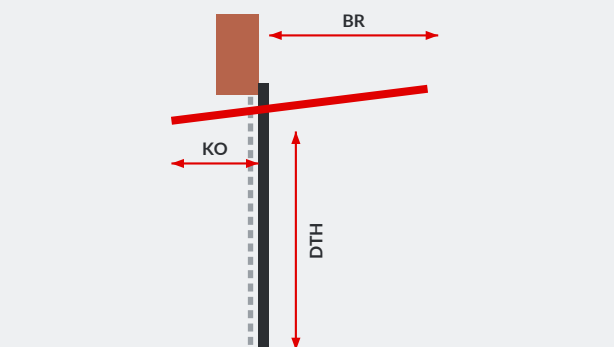

Guide only, not to scale

Retractable, side view

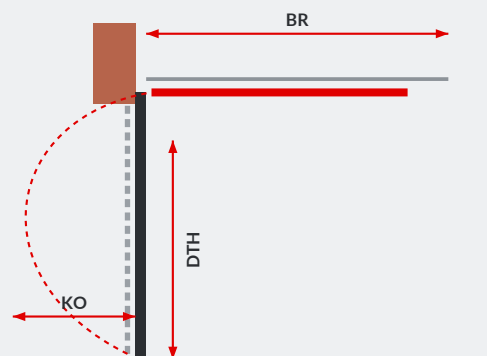

Guide only, not to scale

Canopy clearances by door height

Order height	FOH	KU	KO	BR
6ft 4in	1940mm	55mm	665mm	1280mm
6ft 6in	1980mm	55mm	705mm	1280mm
6ft 10in	2080mm	55mm	805mm	1280mm
7ft 0in	2135mm	55mm	860mm	1280mm

KU is how far the door drops below the frame head when open. All figures in mm.

Drive through, worked example

Gear	Frame opening	DT width	DT height
Canopy	2134 x 1981	2104	1865
Retractable	2134 x 1981	2064	1865

Canopy: frame opening width less 15mm per side for the side seals. Retractable: less 35mm per side for the arms. Height on both: frame opening height less 116mm for the slam, leaf depth and tolerances.

What the terms mean

Frame	All doors have a 50mm frame on each side and a 50mm cross bar at the head.
DTW / DTH	Drive through width and height, the clear space with the door open. It doesn't include the handle on manual doors.
SR	Side room. Only matters if the frame is fitted behind the brickwork, when you'll need 100mm per side for the frame and brackets.
KO	Kick out, how far the door swings out in front as it opens. Up to 1200mm on retractable doors.

FOW / FOH	Frame opening width and height, between the inside edges of the frame and from the floor to the underside of the frame head.
OAF	Overall frame size. The width is the door and frame together, and the height is the door plus the 50mm frame.
HR	Headroom above the frame. None is needed on either gear.
BR	Back room, measured from the back of the frame. About 1280mm on canopy doors and 1850mm on retractable doors.

* All sizes exclude fitting tolerances, which should be assessed on site. We recommend 8mm to 10mm per side. The installer should check the opening before fitting, as claims made after installation can't be accepted.

Matching pedestrian doors

A side or rear door into the garage is much easier to live with when it matches the main door. Both the Classic and the Icon pedestrian doors come in rib styles that line up with the up and over designs, in the same 32 colours, and they're supplied fully assembled in their frames.



Medium Vertical




Medium Horizontal

GDO Classic pedestrian doors

Single skin steel, pre framed

- Standard and Medium rib, vertical or horizontal
- Overall widths up to 800mm or 1000mm
- Overall heights up to 2040mm, 2184mm or 2340mm
- Black handle as standard, with a black die cast handle as an option
- Hinged left or right, opening outwards as standard
- Traffic White, Anthracite Grey and Jet Black at no extra cost

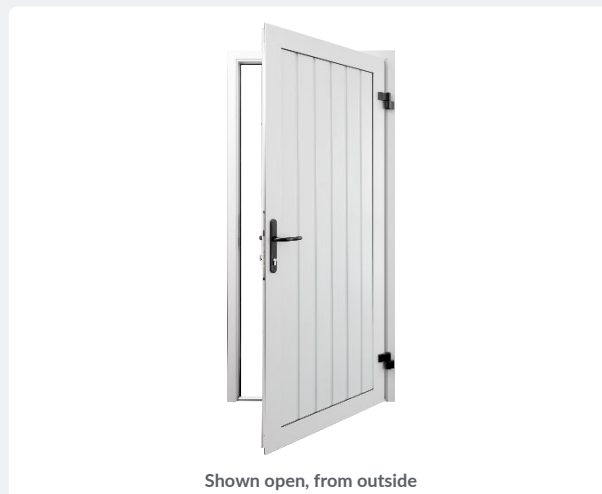

Shown open, from outside

GDO Icon pedestrian doors

Braced steel with a steel sub frame as standard

- Standard, Medium and Wide rib, vertical or horizontal, plus the Millennium designs
- Made to measure up to 1320mm wide and 2340mm high
- Reinforced steel bracing on the back of the panel
- Lever handle, latch and deadlock with an internal thumb turn
- Seals built into the frame, with a threshold supplied
- 3D adjustable hinges for easy alignment on site

Which pedestrian door matches?

UP AND OVER DESIGN

CLASSIC PEDESTRIAN DOOR

ICON PEDESTRIAN DOOR

Standard Vertical

Classic Standard Vertical

Icon Standard Vertical

Standard Horizontal Rib

Classic Standard Horizontal

Icon Standard Horizontal

Mid Vertical

Classic Medium Vertical

Icon Medium Vertical

Mid Horizontal Rib

Classic Medium Horizontal

Icon Medium Horizontal

Wide Vertical or Wide Horizontal Rib

Not available

Icon Wide Vertical or Wide Horizontal

* For the panelled and window designs, a Standard or Medium rib pedestrian door in the same colour sits well alongside. Ask for keyed alike cylinders and one key will open both doors.

Steel garden gates

Our steel pedestrian gates are made for side passages, garden entrances and bin stores, and they're finished in the same 32 colours as the garage doors so the front of the house can match. There are two designs, with the ribs running either across the gate or up it.



GDO Narrow Rib Horizontal Pedestrian Gate

Narrow horizontal ribs for a modern look that sits well alongside slatted fencing and rendered walls.



GDO Narrow Rib Vertical Pedestrian Gate

Narrow vertical ribs for a more traditional look, ideal between brick piers or next to a vertical rib up and over door.



How the gates are made

- Double skinned pressed galvanised steel leaf, ribbed on both faces, on an aluminium chassis
- Two galvanised steel box section posts, with a closing edge profile on the latch post
- Made to measure from 800mm to 1300mm overall width, including both posts
- Post heights of 1265mm or 1865mm, for a leaf of roughly 1200mm (4ft) or 1800mm (6ft)
- Black aluminium hinges with up to 15mm of adjustment, and a black lever handle
- Stainless steel single point deadbolt, lockable from both sides
- Any of the 32 powder coated colours at no extra cost, applied to the leaf and posts

* The posts are fixed first and the leaf is then hung, which is well within reach of a competent DIYer. Order the overall width about 10mm less than your opening, so a 1000mm gap would take a 990mm gate.

Our guarantee

Every GDO up and over door, pedestrian door and garden gate is supplied by GarageDoorsOnline and covered by the guarantee below. Please keep your order confirmation and leave the serial number label on the door, as we'll need both if you ever need to make a claim.

2 years

On the door panel, parts and the paint finish

48 hours

To check your delivery and report any damage

5 a day

Open and close operations in normal domestic use

10 years

Of advice from our team on safe, reliable use

What's covered

- 2 years on the door panel and parts, from the date of delivery
- 2 years on the paint finish for the 32 listed colours. Non standard colours aren't covered
- 2 years on springs, tracks, rollers, hinges and locking in normal domestic use, of no more than 5 operations (open/close) per day
- Lifting cables are covered for 2 years, parts only
- Any part we replace is covered for 6 months, or for the rest of the original guarantee period
- Advice from our team on the safe, reliable use of the door for 10 years

Who it applies to

- The original purchaser, for doors bought from GarageDoorsOnline and installed in the UK
- The door itself, with its serial number readable and in place, and proof of purchase
- It doesn't cover the cost of removal, refitting or delivery

How we deal with a claim

- Call our order tracking and warranties team with your order number and photos of the problem
- Depending on the fault, we'll repair or replace the part, exchange the door, or agree a reduction in price

When your door arrives

- Check everything over within 48 hours of delivery and tell us straight away about any damage or missing parts
- Please don't book an installer or take out the old door until the new one has arrived and been checked
- Claims for damage that could have been seen before fitting can't be accepted once the door is installed

What isn't covered

- Damage from incorrect handling, installation, adjustment or maintenance, or repairs by someone not suitably qualified
- Damage from fire, flooding, salt, alkalis, acids, bird droppings or air pollution
- Paint on doors within reach of coastal or estuary air
- Non approved parts, or changes made to the door
- Minor marks and scratches, which should be touched up straight away
- Slight marks in the steel that show through the powder coat, and size tolerances of 3mm to 4mm

Looking after your door

- Wash it down with mild soapy water a few times a year and rinse it off
- Have the cables, springs and latches checked and adjusted once a year by a competent garage door engineer

Order tracking and warranties

01926 351 060

enquiries@garagedoorsonline.co.uk

Monday to Friday, 8:30am to 5:30pm

GarageDoorsOnline, part of a building products group trading since 1986

GARAGEDOORS**ONLINE**

THE UK'S PREMIER ONLINE GARAGE DOOR SUPPLIER

The smarter way to buy your garage door. Established in 2007, GarageDoorsOnline was the first true UK online specialist for configurable garage doors, and we are part of a long established group of building product specialists trading since 1986.

Why buy from us

Our own GDO brand

Steel up and over doors in 13 made to measure designs and five standard sizes, with matching pedestrian doors and garden gates in the same 32 colours.

Real technical help

Our specialist staff have over 30 years of individual industry experience, so you can talk through sizes, gear and options before you order.

Trade accounts

Competitive trade pricing for installers and builders, with drawings and technical information to support your projects.

Made to measure as standard

Most doors are made to your overall sizes at no extra cost, and every made to measure order is checked before production.

Clear online pricing

Configure your door online with transparent pricing, order 24/7, and have it delivered nationwide.

Support after you order

A dedicated line for order tracking and warranty questions, so you always know where your door is.

Talk to our team

Sales and direct orders

01926 463 888

Order tracking and warranties

01926 351 060

Email

enquiries@garagedoorsonline.co.uk

Shop online

garagedoorsonline.co.uk

Office hours

Monday to Friday, 8:30am to 5:30pm

